

SN74AUP1T34-Q1 1 位单向电压电平转换器

1 特性

- 适用于汽车电子 应用
 - 符合 AEC-Q100 标准
 - 器件温度等级 1: -40°C 至 125°C 的环境运行温度范围
 - 器件人体放电模式 (HBM) 静电放电 (ESD) 分类等级 3A
 - 带电器件模型 (CDM) ESD 分类等级 C5
- 0.9V 至 3.6V 的宽运行 VCC 范围
- 均衡的传播延迟: $t_{PLH} = t_{PHL}$ (1.8V 至 3.3V 转换时的典型值)
- 低静态功耗: ICC 最高为 5μA
- ±6mA 输出驱动 (电压为 3V 时)
- I_{off} 支持部分掉电模式运行
- VCC 隔离特性 – 如果 VCCA 输入接地, 则 B 端口处于高阻态
- 输入滞后可实现输入转换和输入上更好的开关噪声抗扰度
- 静电放电 (ESD) 保护性能超过 JESD 22 规范要求
- 5000V 人体模型 (AEC-Q100-002-E)
- 锁存性能满足 100mA, 符合 Q100-004-D 规范

2 应用范围

- 汽车
- 企业
- 工业
- 个人电子产品
- 电信

3 说明

SN74AUP1T34-Q1 器件是一款 1 位非反向转换器, 使用两条独立的可配置电源轨。该单向转换器在 A 和 B 两端口间转换。A 端口设计用于跟踪 VCCA。VCCA 可接受从 0.9V 到 3.6V 范围内的电源电压。B 端口设计用于跟踪 VCCB。VCCB 可接受从 0.9V 至 3.6V 间的电源电压值。这可实现 1V, 1.2V, 1.5V, 1.8V, 2.5V 和 3.3V 电压节点间的低压转换。此外, SN74AUP1T34-Q1 完全适用于使用 I_{off} 的局部掉电应用。 I_{off} 电路会禁用输出, 从而在器件掉电时防止电流回流损坏器件。

VCC 隔离特性确保了在 VCCA 输入在 GND 上时, B 端口处于高阻抗状态。如果 VCCB 输入在 GND 上, 到 A 侧的任一输入都不会导致泄漏电流, 即使在悬空状态时也是如此。

器件信息⁽¹⁾

器件型号	封装	封装尺寸 (标称值)
SN74AUP1T34-Q1	SC70 (5)	2.00mm × 1.25mm

(1) 要了解所有可用封装, 请参见数据表末尾的可订购产品附录。

示例应用图



Copyright © 2016, Texas Instruments Incorporated



目录


1	特性	1	8.3	Feature Description	7
2	应用范围	1	8.4	Device Functional Modes	7
3	说明	1	9	Application and Implementation	8
4	修订历史记录	2	9.1	Application Information	8
5	Pin Configuration and Functions	3	9.2	Typical Application	8
6	Specifications	3	10	Power Supply Recommendations	9
6.1	Absolute Maximum Ratings	3	11	Layout	10
6.2	ESD Ratings	3	11.1	Layout Guidelines	10
6.3	Recommended Operating Conditions	4	11.2	Layout Example	10
6.4	Thermal Information	4	12	器件和文档支持	11
6.5	AC Electrical Characteristics	5	12.1	社区资源	11
6.6	Typical Characteristics	6	12.2	商标	11
7	Parameter Measurement Information	6	12.3	静电放电警告	11
8	Detailed Description	7	12.4	Glossary	11
8.1	Overview	7	13	机械、封装和可订购信息	11
8.2	Functional Block Diagram	7			

4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

Changes from Original (December 2013) to Revision A	Page
• 已添加 ESD 额定值表，特性 描述部分，器件功能模式，应用和实施部分，电源相关建议部分，布局部分，器件和文档支持部分以及机械、封装和可订购信息部分。	1
• 已删除 订购信息表	1

5 Pin Configuration and Functions

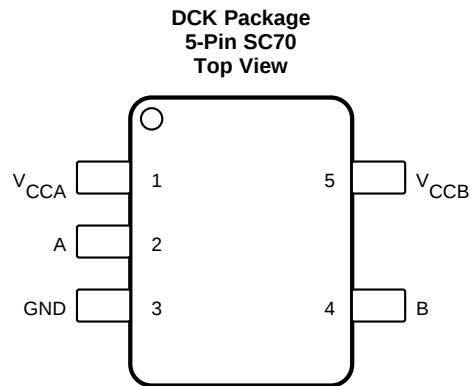

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
A	2	I	Input Port. Referenced to V_{CCA} .
B	4	O	Output Port. Referenced to V_{CCB} .
GND	3	—	Ground.
V_{CCA}	1	—	Input Port DC Power Supply.
V_{CCB}	5	—	Output Port DC Power Supply.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_{CCA} , V_{CCB}	Supply voltage		−0.3	4	V
V_I	Input voltage		−0.5	4.6	V
V_O	Voltage applied to any output in the high-impedance or power-off state		−0.5	4.6	V
	Voltage applied to any output in the high or low state		−0.5	4.6	
I_{IK}	Input clamp current	$V_I < 0$		−50	mA
I_{OK}	Output clamp current	$V_O < 0$		−50	mA
I_O	Continuous output current			±50	mA
	Continuous current through V_{CCA} or GND			±100	mA
T_{stg}	Storage temperature		−65	150	°C

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ , Classification 3A	5000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ , Classification C5	750	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

SN74AUP1T34-Q1

ZHCSEZ0A – DECEMBER 2013 – REVISED APRIL 2016

www.ti.com.cn

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	VCCA	VCCB	MIN	MAX	UNIT
V_{CCA}, V_{CCB} Supply voltage				0.9	3.6	V
V_{IH} High-level input voltage		0.9 V to 1.95 V	0.9 V to 1.95 V	$0.65 \times V_{CCA}$		V
		2.3 V to 2.7 V	0.9 V to 3.6 V	1.6		
		3 V to 3.6 V	0.9 V to 3.6 V	2		
V_{IL} Low-level input voltage		0.9 V	0.9 V to 1.95 V	$0.3 \times V_{CCA}$		V
		1 V to 1.95 V	0.9 V to 1.95 V	$0.35 \times V_{CCA}$		
		2.3 V to 2.7 V	0.9 V to 3.6 V	0.7		
		3 V to 3.6 V	0.9 V to 3.6 V	0.9		
$\Delta t/\Delta v$ Input transition rise or fall rate		3 V to 3.6 V	0.9 V to 3.6 V		200	ns/V
T_A Operating free-air temperature				–40	125	°C
V_{OH}	$I_{OH} = -100 \mu A$	$V_I = V_{IH}$	0.9 V to 3.6 V	0.9 V to 3.6 V	$V_{CCB} - 0.2$	V
	$I_{OH} = -0.25 \text{ mA}$		0.9 V to 1 V	0.9 V to 1 V	$0.75 \times V_{CCB}$	
	$I_{OH} = -1.5 \text{ mA}$		1.2 V	1.2 V	1	
	$I_{OH} = -2 \text{ mA}$		1.65 V	1.65 V	1.32	
	$I_{OH} = -3 \text{ mA}$		2.3 V	2.3 V	1.9	
	$I_{OH} = -6 \text{ mA}$		3 V	3 V	2.72	
V_{OL}	$I_{OL} = 100 \mu A$	$V_I = V_{IL}$	0.9 V to 3.6 V	0.9 V to 3.6 V	0.1	V
	$I_{OL} = 0.25 \text{ mA}$		0.9 V to 1 V	0.9 V to 1 V	0.1	
	$I_{OL} = 1.5 \text{ mA}$		1.2 V	1.2 V	$0.3 \times V_{CCB}$	
	$I_{OL} = 2 \text{ mA}$		1.65 V	1.65 V	0.31	
	$I_{OL} = 3 \text{ mA}$		2.3 V	2.3 V	0.31	
	$I_{OL} = 6 \text{ mA}$		3 V	3 V	0.31	
I_i Control inputs	$V_i = V_{CCA}$ or GND	0.9 V to 3.6 V	0.9 V to 3.6 V		± 1	μA
I_{off} A or B port	V_I or $V_O = 0$ to 3.6 V	0 V	0 V to 3.6 V		± 5	μA
		0 V to 3.6 V	0 V		± 5	
I_{CCA}	$V_I = V_{CCI}$ or GND, $I_O = 0 \text{ mA}$	0.9 V to 3.6 V	0.9 V to 3.6 V		2.7	μA
		0.9 V to 3.6 V	V_{CCA}		2	
		0 V	0 V to 3.6 V		1	
		0 V to 3.6 V	0 V		1	
I_{CCB}	$V_I = V_{CCI}$ or GND, $I_O = 0 \text{ mA}$	0.9 V to 3.6 V	0.9 V to 3.6 V		2.7	μA
		0.9 V to 3.6 V	V_{CCA}		2	
		0 V	0 V to 3.6 V		1	
		0 V to 3.6 V	0 V		1	
$I_{CCA} + I_{CCB}$	$V_I = V_{CCI}$ or GND, $I_O = 0 \text{ mA}$	0.9 V to 3.6 V	0.9 V to 3.6 V		5.4	μA
C_{io} A or B port		3.3 V	3.3 V		4	pF

6.4 Thermal Information


THERMAL METRIC ⁽¹⁾		SN74AUP1T34-Q1	UNIT
		DCK (SC70)	
		5 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	301.9	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	113	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	79.1	°C/W
ψ_{JT}	Junction-to-top characterization parameter	3.9	°C/W
ψ_{JB}	Junction-to-board characterization parameter	78.3	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

6.5 AC Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER	C_L	V_{CCA}	$V_{CCB} = 0.9\text{ V}$		$V_{CCB} = 1.2\text{ V}$		$V_{CCB} = 1.65\text{ V}$		$V_{CCB} = 2.3\text{ V}$		$V_{CCB} = 3\text{ V}$		UNIT
			TYP	MAX	TYP	MAX	TYP	MAX	TYP	MAX	TYP	MAX	
t_{PLH}/t_{PHL}	5 pF	0.9 V	25		18		16.2		16.3		16.8		ns
	5 pF	1.2 V		42.5		24.9		23.2		22.6		22.5	
	5 pF	1.65 V		40		10.7		8.84		8.08		7.88	
	5 pF	2.3 V		41.3		8.02		5.73		4.92		4.2	
	5 pF	3 V		42.5		7.61		4.5		3.65		3.39	
t_{PLH}/t_{PHL}	10 pF	0.9 V	28.9		19.8		17.9		18		18.5		ns
	10 pF	1.2 V		43.22		12.33		9.57		8.81		8.61	
	10 pF	1.65 V		40.44		9.21		6.57		5.6		4.73	
	10 pF	2.3 V		41.56		8.3		5.54		4.42		4.07	
	10 pF	3 V		42.81		7.87		4.8		3.8		3.36	
t_{PLH}/t_{PHL}	15 pF	0.9 V	30.6		21.6		19.6		19.7		20.3		ns
	15 pF	1.2 V		43.87		16.2		11.8		11		11	
	15 pF	1.65 V		40.78		14.7		8.8		7.1		6.4	
	15 pF	2.3 V		41.79		14.9		7.6		5.88		5.27	
	15 pF	3 V		43.09		16.2		6.98		5.4		4.7	
t_{PLH}/t_{PHL}	30 pF	0.9 V	32.1		21.3		18.7		18		18.3		ns
	30 pF	1.2 V		45.65		15.1		12.37		11.61		11.41	
	30 pF	1.65 V		41.72		12.18		8.15		6.94		6.1	
	30 pF	2.3 V		42.44		12.35		7.25		5.55		4.97	
	30 pF	3 V		43.69		11.6		6.92		4.95		4.35	

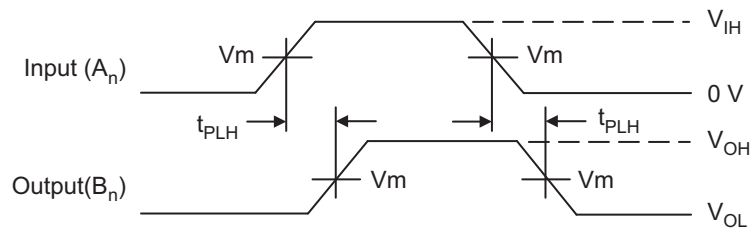

$$V_{MI} = V_{IH}/2; V_{MO} = V_{CCB}/2$$

$$t_R = t_F = 2.0\text{ ns, } 10\% \text{ to } 90\%; f = 1\text{ MHz; } t_W = 500\text{ ns}$$

Figure 1. Waveform 1 - Propagation Delays

6.6 Typical Characteristics


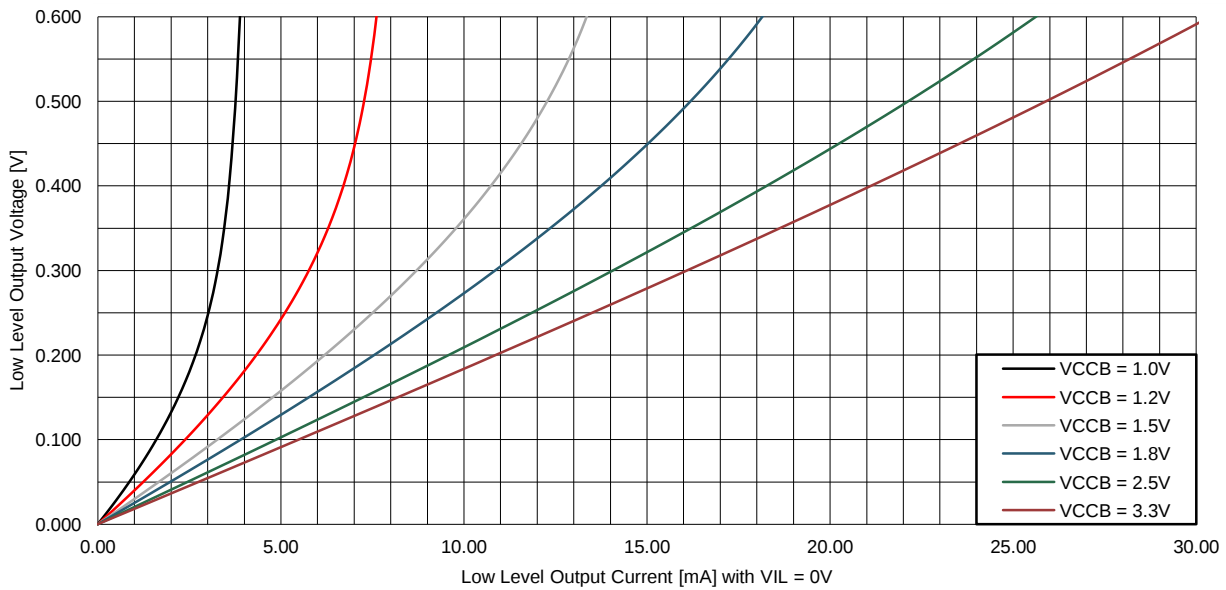


Figure 2. Low Level Output Voltage vs Low Level Output Current

7 Parameter Measurement Information

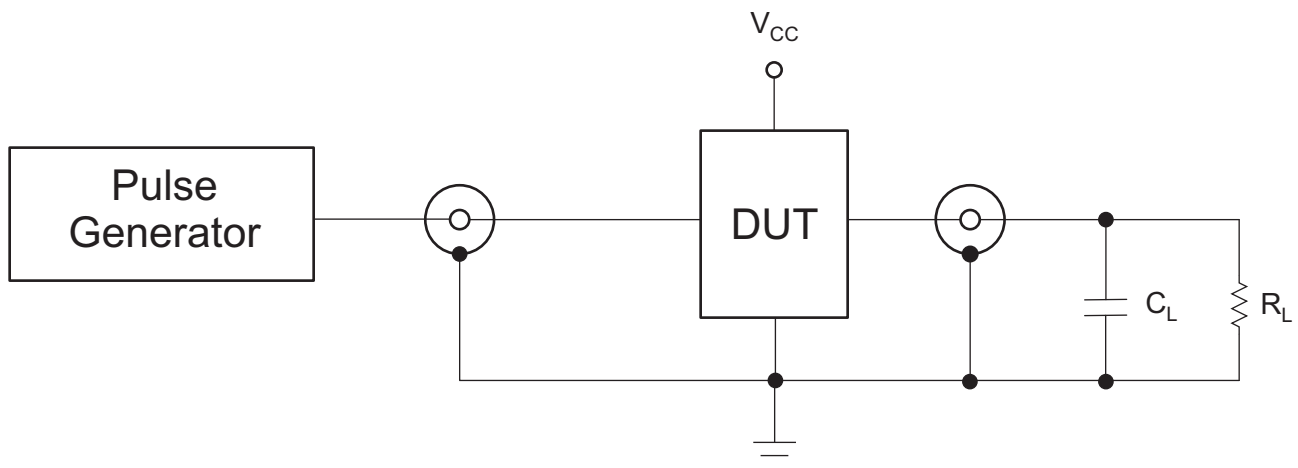

TEST

t_{PLH} , t_{PHL}

C_L = 5 pF, 10 pF, 15 pF, 30 pF or equivalent (includes probe and jig capacitance)

R_L = 1 M Ω or equivalent

Z_{OUT} of pulse generator = 50 Ω


Figure 3. AC (Propagation Delay) Test Circuit

8 Detailed Description

8.1 Overview

The SN74AUP1T34-Q1 is a unidirectional, single-bit, dual-supply, noninverting voltage-level translator. Pin A, which is referenced to V_{CCA} , receives the signal that is to be level translated. Pin B, which is referenced to V_{CCB} , transmits the level translated signal. Both supply pins V_{CCA} and V_{CCB} support a voltage range from 0.9 V to 3.6 V.

8.2 Functional Block Diagram

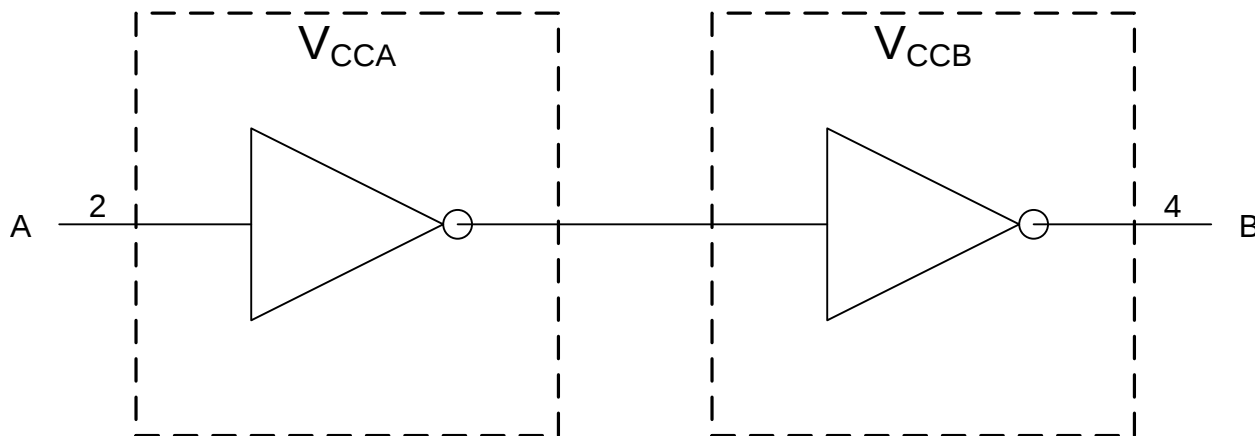

Copyright © 2016, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Fully Configurable Dual-Rail Design

Both V_{CCA} and V_{CCB} can be supplied at any voltage from 0.9 V to 3.6 V, making the device suitable for translating between any of the voltage nodes (1 V, 1.2 V, 1.8 V, 2.5 V, and 3.3 V).

8.3.2 Partial-Power-Down Mode Operation

I_{off} circuitry disables the outputs, preventing damaging current backflow through the SN74AUP1T34-Q1 when it is powered down. This can occur in applications where subsections of a system are powered down (partial-power-down) to reduce power consumption.

8.3.3 V_{CC} Isolation

The V_{CC} isolation feature ensures that if either V_{CCA} or V_{CCB} are at GND (or < 0.4 V), both ports A and B are set to a high-impedance state, preventing false logic levels from being presented to either bus.

8.3.4 Input Hysteresis

Input hysteresis allows the input to support slew rates as slow as 200 ns/V, improving switching noise immunity.

8.4 Device Functional Modes

Table 1 lists the functional modes of the SN74AUP1T34-Q1.

Table 1. Function Table

INPUT	OUTPUT
A PORT	B PORT
L	L
H	H

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The SN74AUP1T34-Q1 can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another.

9.2 Typical Application

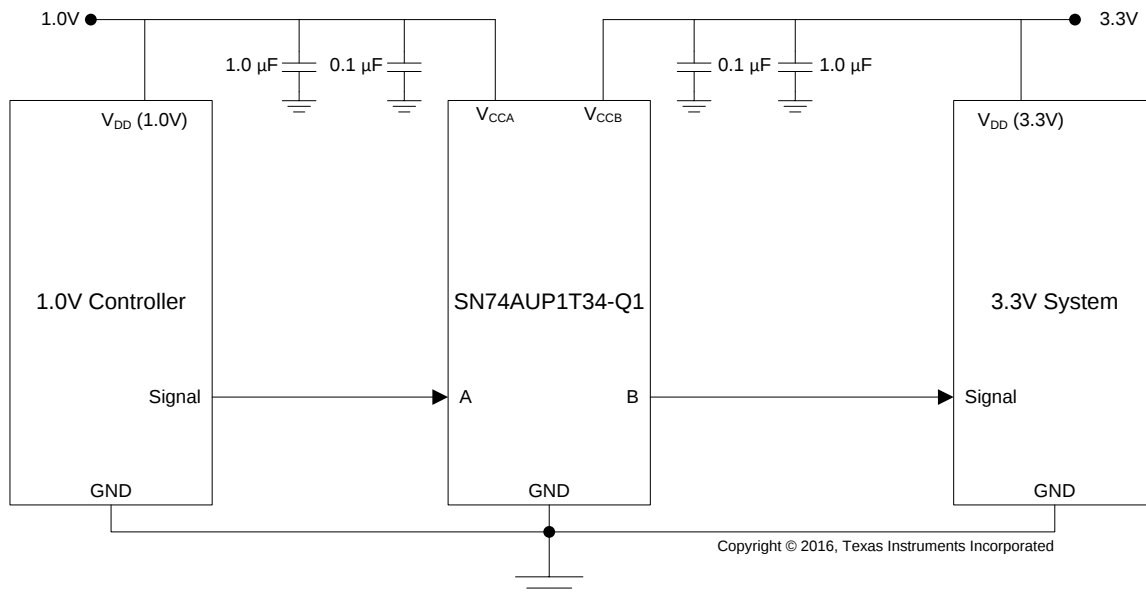


Figure 4. Typical Application Example

9.2.1 Design Requirements

Table 2 lists the design requirements of the SN74AUP1T34-Q1.

Table 2. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Input Voltage Range	0.9 V to 3.6 V
Output Voltage Range	0.9 V to 3.6 V

9.2.2 Detailed Design Procedure

To begin the design process, determine the following:

- Input voltage range
 - Use the supply voltage of the device that is driving the SN74AUP1T34-Q1 device to determine the input voltage range. For a valid logic-high, the value must exceed the V_{IH} of the input port. For a valid logic low the value must be less than the V_{IL} of the input port.
- Output voltage range
 - Use the supply voltage of the device that the SN74AUP1T34-Q1 device is driving to determine the output voltage range.

9.2.3 Application Curve



Figure 5. 10 MHz Up Translation (0.9 V to 3.6 V)

10 Power Supply Recommendations

Connect ground before applying either V_{CCA} or V_{CCB} . There is no specific power sequence requirement for the SN74AUP1T34. V_{CCA} or V_{CCB} may be powered up first, and V_{CCA} or V_{CCB} may be powered down first.

11 Layout

11.1 Layout Guidelines

To ensure reliability of the device, TI recommends following common printed-circuit board layout guidelines.

- Bypass capacitors must be used on power supplies.
- Short trace lengths must be used to avoid excessive loading.
- Placing pads on the signal paths for loading capacitors or pullup resistors helps adjust rise and fall times of signals depending on the system requirements.

11.2 Layout Example

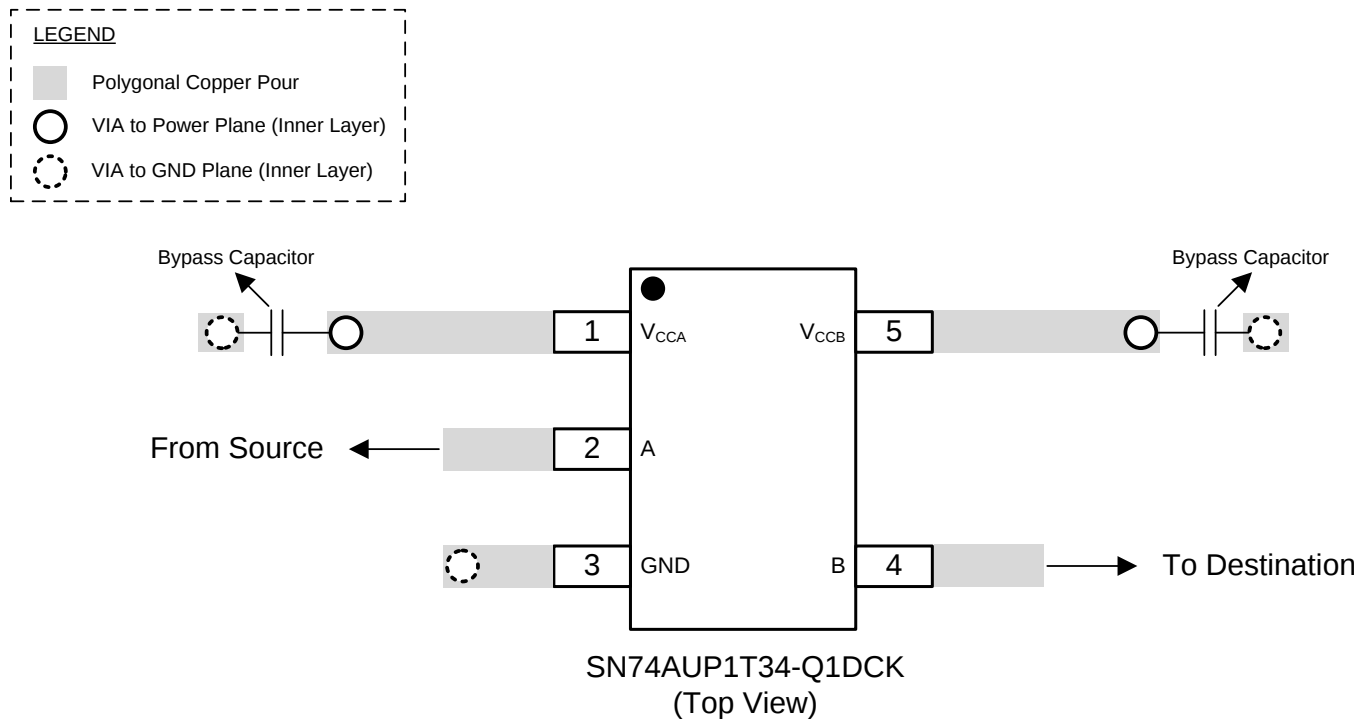


Figure 6. Example Layout

12 器件和文档支持

12.1 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.2 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.3 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

12.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com.cn/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2016, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
SN74AUP1T34QDCKRQ1	ACTIVE	SC70	DCK	5	3000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	U4E	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AUP1T34QDCKRQ1	SC70	DCK	5	3000	178.0	9.0	2.4	2.5	1.2	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AUP1T34QDCKRQ1	SC70	DCK	5	3000	180.0	180.0	18.0

DCK (R-PDSO-G5)

PLASTIC SMALL-OUTLINE PACKAGE



4093553-3/G 01/2007

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
 - Falls within JEDEC MO-203 variation AA.

DCK (R-PDSO-G5)

PLASTIC SMALL OUTLINE



- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
 - Publication IPC-7351 is recommended for alternate designs.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司