

1.5/3.0/6.0 Gbps SATA/SAS 再驱动器

查询样品: **SN75LVCP600S**

特性

- **3.3-V** 单电源
- 适用于为达 **40 英寸 (1.0 米)** 以上的各种尺寸 **FR4 PC** 电路板接收 **6.0 Gbps** 数据。
- 与**TX** 的两级均衡**RX**
 - **RX**→ **7, 15 dB**
 - **TX**→ **0, -1.3 dB**
- 引脚可选 **SATA/SAS** 信号发送
- 可编程长通道静噪阈值
- 低有效功率及局部工作 / 睡眠状态支持
 - 典型值 (**6Gbps** 时的工作模式) **106 mW**
 - **11 mW** (局部工作 / 睡眠状态下的链路) 低于
- 支持布局优化的超小型封装
 - 焊盘**2.5 毫米x 2.5 毫米QFN10**
- 高 **ESD** 瞬态保护
 - **HBM: 9,000 V**
 - **CDM: 1,500 V**
 - **MM: 200 V**

应用

- 笔记本与桌面电脑、扩展基座、有源线缆、服务器以及工作站

说明

SN75LVCP600S 是一款支持高达 6.0Gbps 数据速率的单通道 SATA/SAS 信号调节器。该器件符合 SATA 物理规范 rev 3.0 与 SAS 电子规范 2.0。SN75LVCP600S 采用 3.3 V 单电源供电, 提供具有自偏压特性的 100 Ω 线路端接, 是 AC 耦合的理想选择。各种输入整合了带外 (OOB) 检测器, 可在保持稳定共模电压与 SATA/SAS 链路一致的同时, 自动消除输出噪声。

SN75LVCP600S 可通过可选均衡设置处理其输入的互连损耗, 能够通过编程来匹配通道中的信号损耗。对于 3Gbps 及以下的数据速率, LVCP600S 可为达 50 英寸径距的 FR4 电路板材料均衡信号。对于 6Gbps 数据速率而言, 该器件可针对 40 英寸以上的 FR4 材料进行补偿。通过设置信号控制引脚 EQ 与 DE, 可对 Rx/Tx 均衡级别进行控制。

该器件支持热插拔功能⁽¹⁾, 可在非同步信号插拔、无供电插拔、带电插拔或异常插拔等器件热插入过程中防止器件损坏。

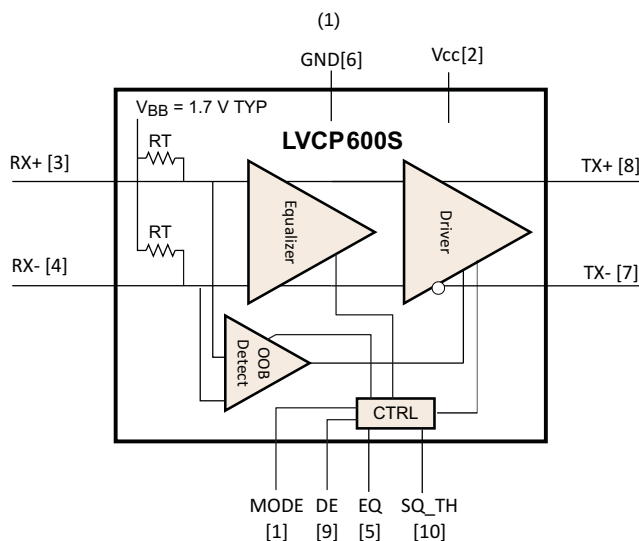


图 1. 数据流方框图

(1) 在不同输入输出中均需使用 AC 耦合电容器。

Table 1. ORDERING INFORMATION⁽¹⁾

PART NUMBER	PART MARKING	PACKAGE
SN75LVCP600SDSKR	600S	10-pin DSK Reel (large)
SN75LVCP600SDSKT	600S	10-pin DSK Reel (small)

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011 年, Texas Instruments Incorporated
English Data Sheet: [SLLSE81](#)



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

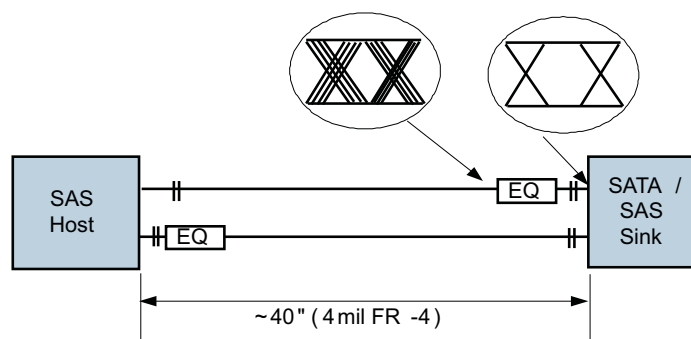

EQ = LVCP600S



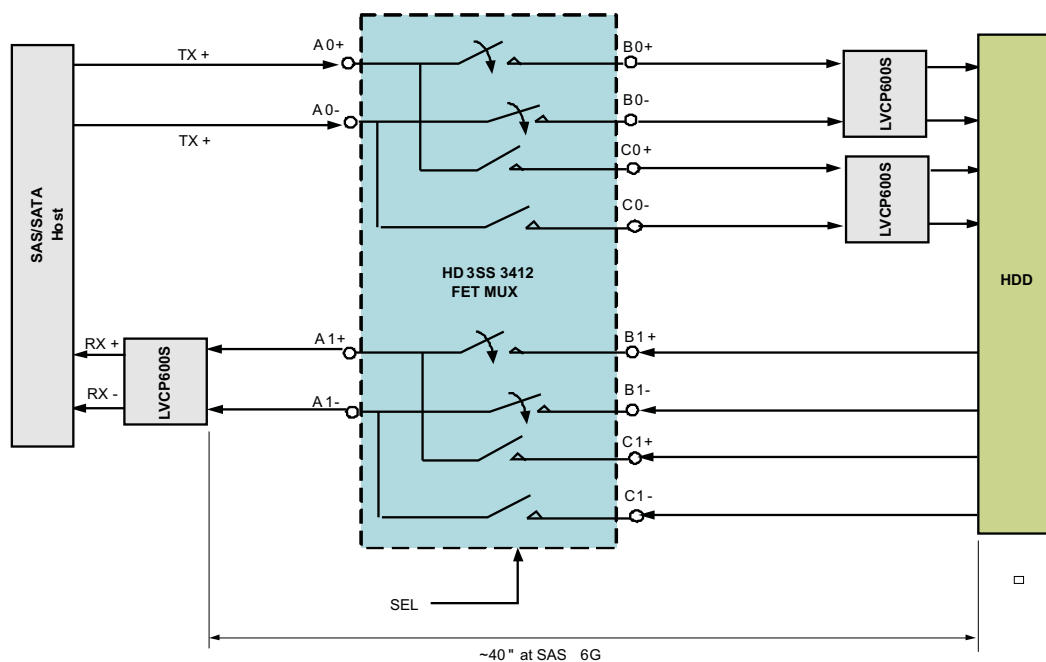


Figure 2. Typical Application

PIN ASSIGNMENTS

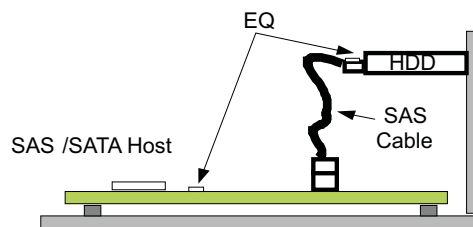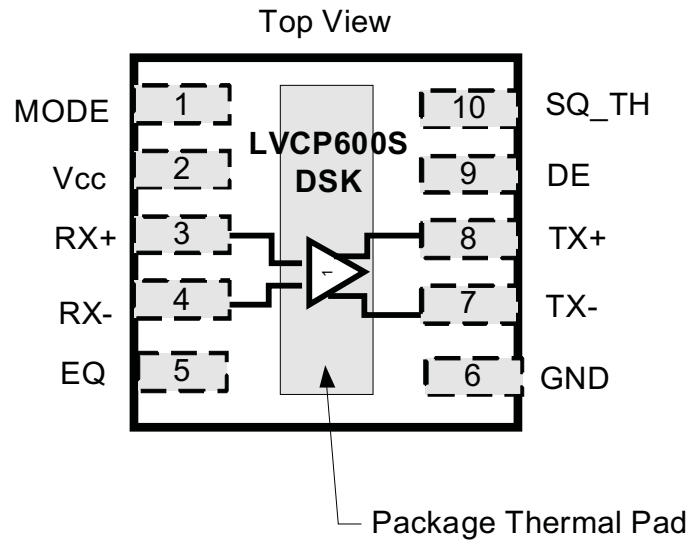


It is recommended to solder the package thermal pad to the ground plane for maximum thermal performance.

PIN FUNCTIONS

PIN		I/O TYPE	DESCRIPTION
NO.	NAME		
HIGH SPEED DIFFERENTIAL I/O			
3	RX+	I, CML	Non-inverting and inverting CML differential inputs. These pins are tied to an internal voltage bias by dual termination-resistor circuit.
4	RX–	I, CML	
8	TX+	I, CML	Non-inverting and inverting CML differential outputs. These pins are tied to an internal voltage bias by dual termination-resistor circuit.
7	TX–	I, CML	
CONTROL PINS			
5	EQ	I, LVCMOS	Selects equalization settings per Table 2 . Internally tied to GND.
9	DE	I, LVCMOS	Selects de-emphasis settings per Table 2 . Internally tied to GND.
1	MODE	I, LVCMOS	Selects SATA or SAS output levels per Table 2 . Internally tied to GND
10	SQ_TH	I, LVCMOS	Selects squelch threshold settings per Table 2 . Internally tied to GND
POWER			
2	V _{CC}	Power	Positive supply should be 3.3V ±10%
6	GND	Power	Supply ground


Table 2. EQ and DE Settings

Level	CONTROL PINS			
	EQ (typ) dB at 6Gbps	DE (typ) dB at 6Gbps	SQ_TH (see V _{OOB} spec)	MODE
0 (default)	7	0	Full Level (normal)	SATA
1	14	–1.3	Reduced Level (long channel)	SAS

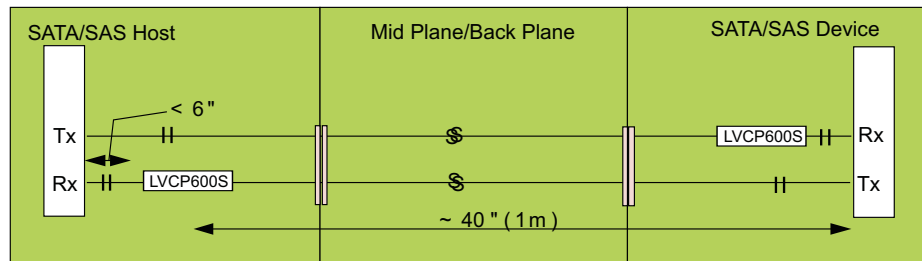

Trace lengths are suggested values based on TI spice simulations (done over programmable limits of input EQ) to meet SATA/SAS loss and jitter spec.

Actual trace length supported by the LVCP600S may be more or less than suggested values and will depend on board layout, trace widths and number of connectors used in the high speed signal path. See eye diagrams at end of datasheet for more placement guidance.

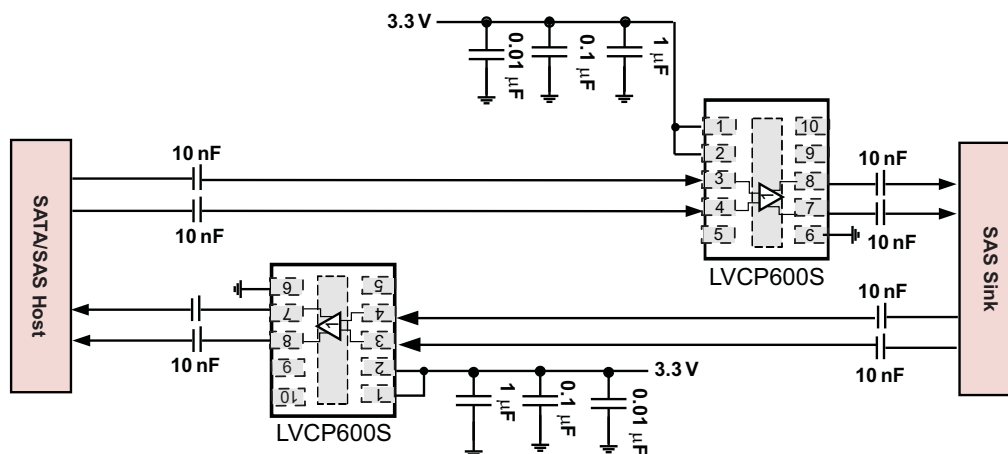Figure 3. Trace Length Example

- Place supply capacitors close to device pin
- EQ selection is set at 7db, device is set in SAS mode, DE and SQ_TH at default settings
- Actual EQ settings depend on device placement relative to host and SATA/SAS device

Figure 4. Typical Device Implementation

OPERATION DESCRIPTION

INPUT EQUALIZATION

The SN75LVCP600S supports programmable equalization in its front stage; the equalization settings are shown in [Table 2](#). The input equalizer is designed to recover a signal even when no eye is present at the receiver and will affectively support FR4 trace at the input anywhere from 4" to 40" at SATA 6G speed. In SAS mode, the device meets compliance point IR in a TXRX connection.

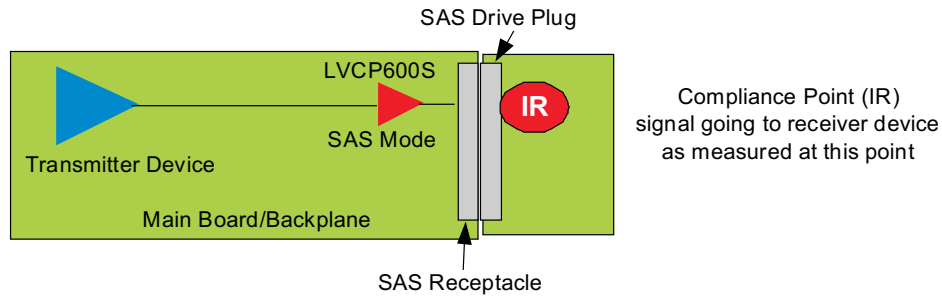


Figure 5. Compliance Point In SAS Mode

AUTO LOW POWER (ALP) MODE (see Figure 10)

As a redriver, the SN75LVCP600S does not participate in SATA or SAS link power management (PM) states. However, the redriver tracks link-power management mode (Partial and Slumber) by relying on the link differential voltage, V_{IDP-p} . The SATA/SAS link is continuously sending and receiving data even in long periods of disk inactivity by sending SYNC primitives (logical idle), except when the link enters Partial or Slumber mode. In these modes the link is in an electrical-idle state (EID). The device input squelch detector tracks EID status. When the input signal is in the electrical idle state, i.e. $V_{IDP-p} < V_{OOB_SATA}/V_{OOB_SAS}$ and stays in this state for $> 10\mu S$, the device automatically enters the low power state. In this state, the output is driven to V_{CM} and the device selectively shuts off internal circuitry to lower power consumption by $\sim 90\%$ of its normal operating power. While in ALP mode, the device continues to actively monitor input signal levels; when the input signal exceeds the SATA/SAS OOB upper threshold level, the device reverts to active state. Exit time from auto low power mode is $< 50ns$ (MAX).

OUT-OF-BAND (OOB) SUPPORT

The squelch detector circuit within the device enables full detection of OOB signaling as specified in the SATA and SAS specifications. Selection of squelch threshold level is made automatically based on the state of MODE pin, SATA or SAS. Squelch circuit ON/OFF time is 8ns max. While in squelch mode, outputs are held to V_{CM} .

DEVICE POWER

The SN75LVCP600S is designed to operate from a single 3.3V supply. Always practice proper power supply sequencing procedure. Apply V_{CC} first before any input signals are applied to the device. The power down sequence is in reverse order.

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		VALUE	UNIT
Supply voltage range ⁽²⁾	V_{CC}	–0.5 to 4	V
Voltage range	Differential I/O	–0.5 to 4	V
	Control I/O	–0.5 to $V_{CC} + 0.5$	V
Electrostatic discharge	Human body model ⁽³⁾	± 9000	V
	Charged-device model ⁽⁴⁾	± 1500	V
	Machine model ⁽⁵⁾	± 200	V
Continuous power dissipation		See Dissipation Rating Table	

- (1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to network ground terminal.
- (3) Tested in accordance with JEDEC Standard 22, Test Method A114-B.
- (4) Tested in accordance with JEDEC Standard 22, Test Method C101-A.
- (5) Tested in accordance with JEDEC Standard 22, Test Method A115-A.

THERMAL INFORMATION

THERMAL METRIC ⁽¹⁾		SN75LVCP600S	UNITS
		DSK (10) PINS	
θ_{JA}	Junction-to-ambient thermal resistance	55.7	°C/W
θ_{JCTop}	Junction-to-case (top) thermal resistance	61.9	
θ_{JB}	Junction-to-board thermal resistance	29.2	
Ψ_{JT}	Junction-to-top characterization parameter	1.0	
Ψ_{JB}	Junction-to-board characterization parameter	29.3	
θ_{JCbott}	Junction-to-case (bottom) thermal resistance	9.4	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

RECOMMENDED OPERATING CONDITIONS

typical values for all parameters are at $V_{CC} = 3.3\text{ V}$ and $T_A = 25^\circ\text{C}$; all temperature limits are specified by design

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{CC}	Supply voltage		3	3.3	3.6	V
$C_{COUPLING}$	Coupling capacitor			12		nF
T_A	Operating free-air temperature		–40		85	°C

ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
DEVICE PARAMETERS						
I_{CCMax}	Active mode supply current	MODE/EQ/DE/SQ_TH = NC, K28.5 pattern at 6Gbps, $V_{ID} = 700\text{mV}_{pp}$, (SATA mode)		29	41	mA
		MODE/EQ/DE/SQ_TH = V_{CC} , K28.5 pattern at 6Gbps, $V_{ID} = 700\text{mV}_{pp}$, (SAS mode)		32	45	
I_{CCPS}	Auto power save mode I_{CC}	When auto low power conditions are met		3.3	5.0	mA
	Maximum data rate				6.0	Gbps
t_{PDelay}	Propagation delay	Measured using K28.5 pattern, See Figure 8		280	330	ps
AutoLP _{ENTRY}	Auto low power entry time	Electrical idle at input, See Figure 10		11	20	μs
AutoLP _{EXIT}	Auto low power exit time	After first signal activity, See Figure 10		30	40	ns

ELECTRICAL CHARACTERISTICS (continued)

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
OOB						
V _{OOB_SAS}	Input OOB threshold (output squelched below this level)	F = 750MHz; SQ_TH=0, MODE = 1 Measured at receiver pin	88	112	131	mV _{pp}
		F = 750MHz; SQ_TH=1, MODE = 1 Measured at receiver pin	67	85	100	
V _{OOB_SATA}	Input OOB threshold (output squelched below this level)	F = 750MHz; SQ_TH=0, MODE = 0 Measured at receiver pin	40	66	86	
		F = 750MHz; SQ_TH=1, MODE = 0 Measured at receiver pin	35	56	72	
D _{VdiffOOB}	OOB differential delta				25	mV
D _{VCMOOB}	OOB common-mode delta				50	mV
t _{OOB1}	OOB mode enter	See Figure 9		3	8	ns
t _{OOB2}	OOB mode exit	See Figure 9		3	8	ns
CONTROL LOGIC						
V _{IH}	High-level input voltage	For all control pins	1.4			V
V _{IL}	Low-level input voltage				0.5	V
V _{INHYS}	Input hysteresis			115		mV
I _{IH}	High-level input current	MODE, SQ_TH = V _{CC}			30	μA
		EQ, DE = V _{CC}			20	
I _{IL}	Low-level input current	MODE, SQ_TH = GND	−30			
		EQ, DE = GND	−10			
RECEIVER AC/DC						
Z _{DIFFRX}	Differential input impedance		85	100	115	Ω
Z _{SERX}	Single-ended input impedance		40			Ω
V _{CMRX}	Common-mode voltage			1.7		V
R _{LDiffRX}	Differential mode return loss (RL)	f = 150MHz–300MHz	18	26		dB
		f = 300MHz–600MHz	14	23		
		f = 600MHz–1.2GHz	10	17		
		f = 1.2GHz–2.4GHz	8	14		
		f = 2.4GHz–3.0GHz	3	13		
R _{XDiffRLSlope}	Differential mode RL slope	f = 300MHz–6.0GHz		−13		dB/dec
R _{LCMRX}	Common-mode return loss	f = 150MHz–300MHz	5	10		dB
		f = 300MHz–600MHz	5	18		
		f = 600MHz–1.2GHz	2	16		
		f = 1.2GHz–2.4GHz	1	12		
		f = 2.4GHz–3.0GHz	1	12		
V _{diffRX}	Differential input voltage PP	MODE = 1, f = 1.5GHz and 3.0GHz	275		1600	mV/ppd
		MODE = 0, f = 1.5GHz and 3.0GHz	225		1600	
I _{B_{RX}}	Impedance balance	f = 150MHz–300MHz	30	47		dB
		f = 300MHz–600MHz	30	40		
		f = 600MHz–1.2GHz	20	34		
		f = 1.2GHz–2.4GHz	10	28		
		f = 2.4GHz–3.0GHz	10	24		
		f = 3.0GHz–5.0GHz	4	22		
		f = 5.0GHz–6.5GHz	4	22		
T _{20-80RX}	Rise/fall time	Rise times and fall times measured between 20% and 80% of the signal. SATA/SAS 6 Gbps speed measured 1" from device pin	62		75	ps

ELECTRICAL CHARACTERISTICS (continued)

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
T_{skewRX}	Differential skew	Difference between the single-ended mid-point of the RX+ signal rising/falling edge, and the single-ended mid-point of the RX– signal falling/rising edge			30	ps
TRANSMITTER AC/DC						
Z_{diffTX}	Pair differential impedance		85	100	122	Ω
Z_{SETX}	Single-ended input impedance		40			Ω
V_{TXtrans}	Sequencing transient voltage	Transient voltages on the serial data bus during power sequencing (lab load)	–1.2	0	1.2	V
RL_{DiffTX}	Differential mode return loss	$f = 150\text{MHz}–300\text{MHz}$	13	22		dB
		$f = 300\text{MHz}–600\text{MHz}$	8	21		
		$f = 600\text{MHz}–1.2\text{GHz}$	6	20		
		$f = 1.2\text{GHz}–2.4\text{GHz}$	6	17		
		$f = 2.4\text{GHz}–3.0\text{GHz}$	3	17		
$TX_{\text{DiffRLSlope}}$	Differential mode RL slope	$f = 300\text{MHz} – 3.0\text{GHz}$		–13		dB/dec
RL_{CMTX}	Common-mode return loss	$f = 150\text{MHz}–300\text{MHz}$	5	19		dB
		$f = 300\text{MHz}–600\text{MHz}$	5	16		
		$f = 600\text{MHz}–1.2\text{GHz}$	2	11		
		$f = 1.2\text{GHz}–2.4\text{GHz}$	1	9		
		$f = 2.4\text{GHz}–3.0\text{GHz}$	1	10		
IB_{TX}	Impedance balance	$f = 150\text{MHz}–300\text{MHz}$	30	43		dB
		$f = 300\text{MHz}–600\text{MHz}$	30	40		
		$f = 600\text{MHz}–1.2\text{GHz}$	20	32		
		$f = 1.2\text{GHz}–2.4\text{GHz}$	10	25		
		$f = 2.4\text{GHz}–3.0\text{GHz}$	10	27		
		$f = 3.0\text{GHz}–5.0\text{GHz}$	4	25		
		$f = 5.0\text{GHz}–6.5\text{GHz}$	4	26		
$\text{Diff}_{\text{VppTX}}$	Differential output voltage swing	DE = 1, MODE = 1→(SAS), $f = 3.0\text{GHz}$ (under no interconnect loss)	385	850	1300	mV/ppd
		DE = 0, MODE = 0→(SATA), $f = 3.0\text{GHz}$ (under no interconnect loss)	400	600	800	
DE	De-Emphasis Level	DE = 1		–1.3		dB
		DE = 0		0		
$VCM_{\text{AC_TX}}$	TX AC CM voltage	At 1.5GHz		20	50	mVppd
		At 3.0GHz		11	26	dBmv (rms)
		At 6.0GHz		13	30	
VCM_{TX}	Common-mode voltage			1.7		V
$T_{20-80\text{TX}}$	Rise/Fall time	Rise times and fall times measured between 20% and 80% of the signal. At 6Gbps SATA or SAS, under no load, measured at the pin	33	50	76	ps
T_{skewTX}	Differential skew	Difference between the single-ended mid-point of the TX+ signal rising/falling edge, and the single-ended mid-point of the TX– signal falling/rising edge, SATA or SAS mode		4	14	ps
TxR/F_{Imb}	TX rise/fall imbalance	At 3 Gbps		3	18	%
TxA_{plmb}	TX amplitude imbalance			1.5	10	

ELECTRICAL CHARACTERISTICS (continued)

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
TRANSMITTER JITTER AT CP⁽¹⁾						
3Gbps SATA mode						
TJ _{TX}	Total jitter ⁽¹⁾		0.26	0.38		UI _{pp}
DJ _{TX}	Deterministic jitter	V _{ID} = 500 mV _{pp} , UI = 333ps, K28.5 control character, EQ/DE=1	0.13	0.24		UI _{pp}
RJ _{TX}	Residual random jitter	V _{ID} = 500 mV _{pp} , UI = 333ps, K28.7 control character, EQ/DE=1	1.16	1.95		ps-rms
6Gbps SATA mode						
TJ _{TX}	Total jitter ⁽¹⁾		0.37	0.61		UI _{pp}
DJ _{TX}	Deterministic jitter	V _{ID} = 500 mV _{pp} , UI = 167ps, K28.5 control character, EQ/DE=1	0.12	0.32		UI _{pp}
RJ _{TX}	Residual random jitter	V _{ID} = 500 mV _{pp} , UI = 167ps, K28.7 control character, EQ/DE=1	1.15	2.2		ps-rms
3Gbps SAS mode						
TJ _{TX}	Total jitter ⁽¹⁾		0.25	0.37		UI _{pp}
DJ _{TX}	Deterministic jitter	V _{ID} = 500 mV _{pp} , UI = 333ps, K28.5 control character, EQ/DE=1	0.12	0.23		UI _{pp}
RJ _{TX}	Residual random jitter	V _{ID} = 500 mV _{pp} , UI = 333ps, K28.7 control character, EQ/DE=1	1.11	2.0		ps-rms
6Gbps SAS mode						
TJ _{TX}	Total jitter ⁽¹⁾		0.35	0.57		UI _{pp}
DJ _{TX}	Deterministic jitter	V _{ID} = 500 mV _{pp} , UI = 167ps, K28.5 control character, EQ/DE=1	0.10	0.29		UI _{pp}
RJ _{TX}	Residual random jitter	V _{ID} = 500 mV _{pp} , UI = 167ps, K28.7 control character, EQ/DE=1	1.10	2.14		ps-rms

- (1) $T_j = (14.1 \times RJ_{SD} + DJ)$ where RJ_{SD} is one standard deviation value of RJ Gaussian distribution. Jitter measurement is at the CP connector and includes jitter generated at the package connection on the printed circuit board, and at the board interconnect as shown in Figure 6.

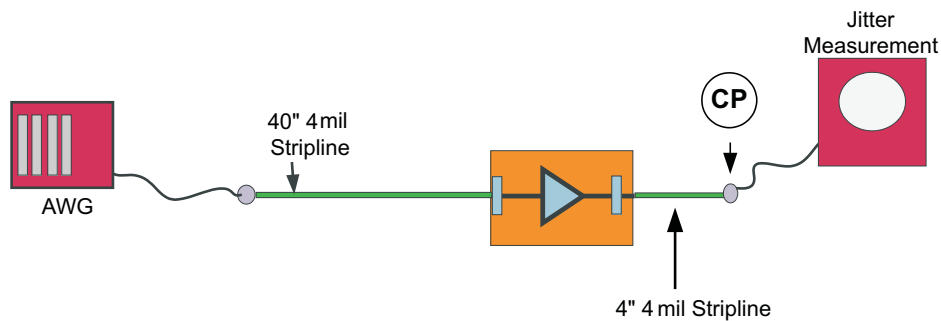


Figure 6. Jitter Measurement Test Condition

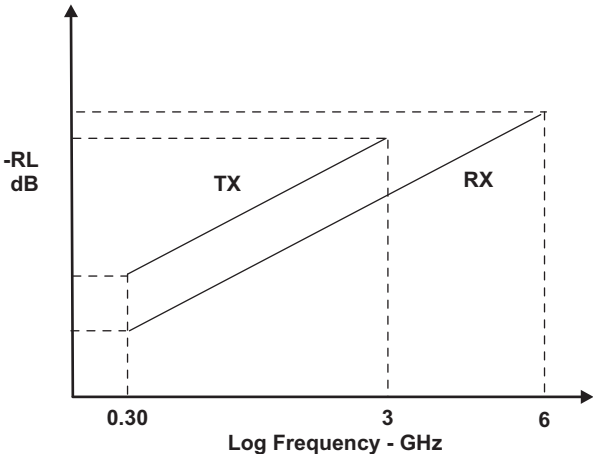


Figure 7. TX, RX Differential Return Loss Limits

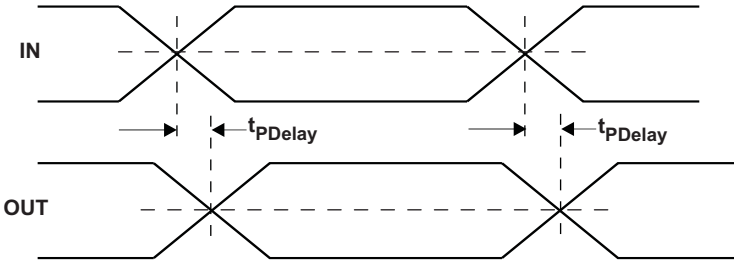


Figure 8. Propagation Delay Timing Diagram

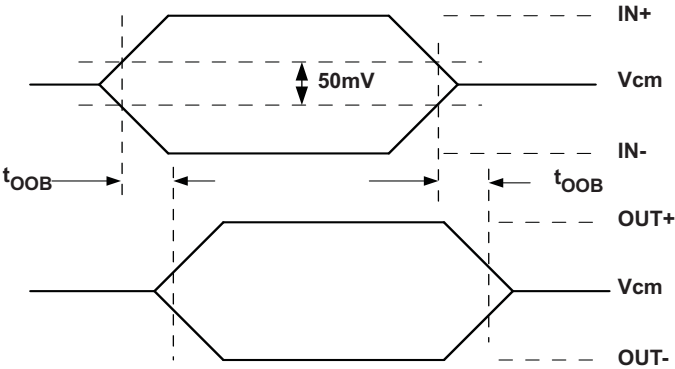


Figure 9. OOB Enter and Exit Timing


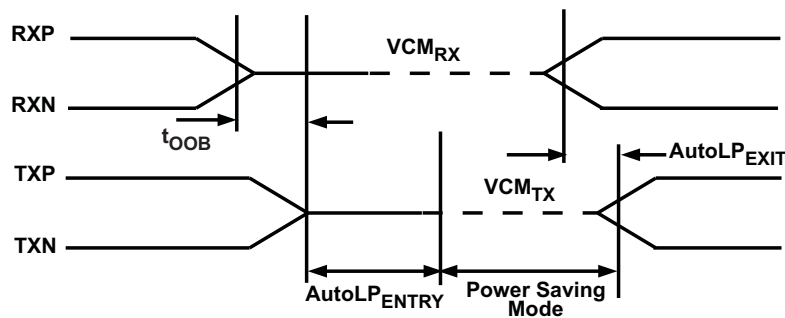


Figure 10. Auto Low Power Mode Entry and Exit Timing

TYPICAL EYE DIAGRAMS AND PERFORMANCE CURVES

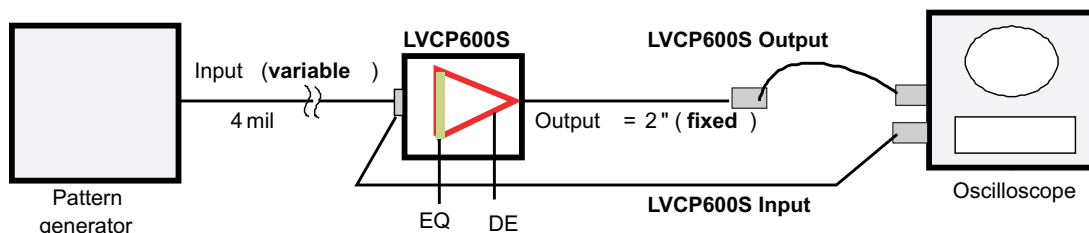

- A. $V_{CC} = 3.3V$; INPUT = K28.5 pattern at 1.5Gbps; 3.0Gbps and 6.0 Gbps; $V_{ID} = 1000mVpp$; TEMP = 25°C; TRACE WIDTH = 4mil

Figure 11. Eye Diagram Measurement Setup for LVCP600S

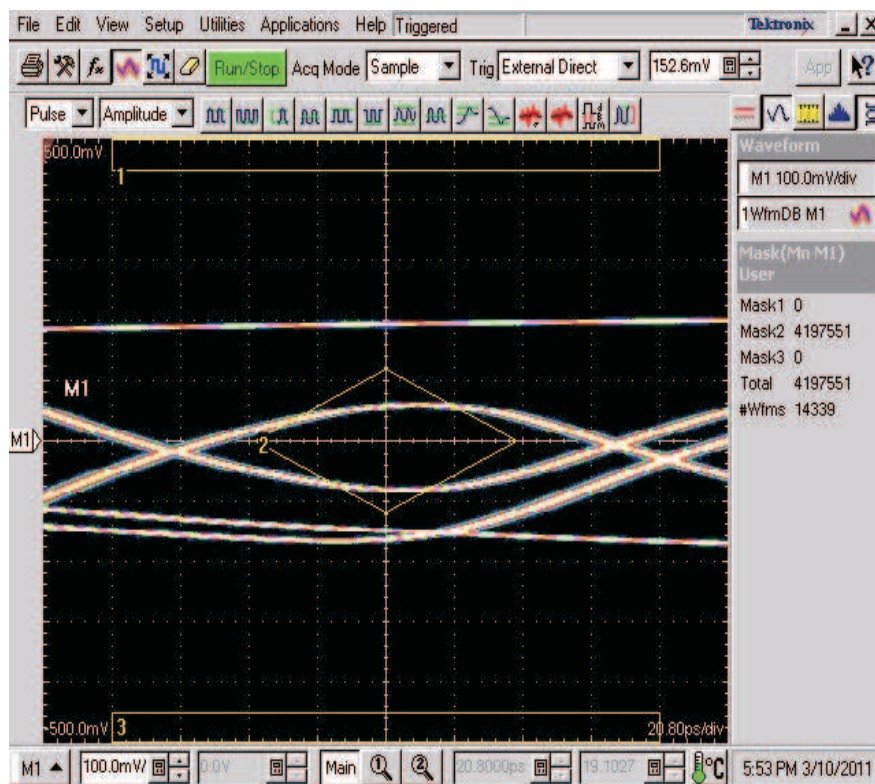


Figure 12. SATA 6.0 Gbps Signal After 16", Input of LVCP600S (MODE=0)

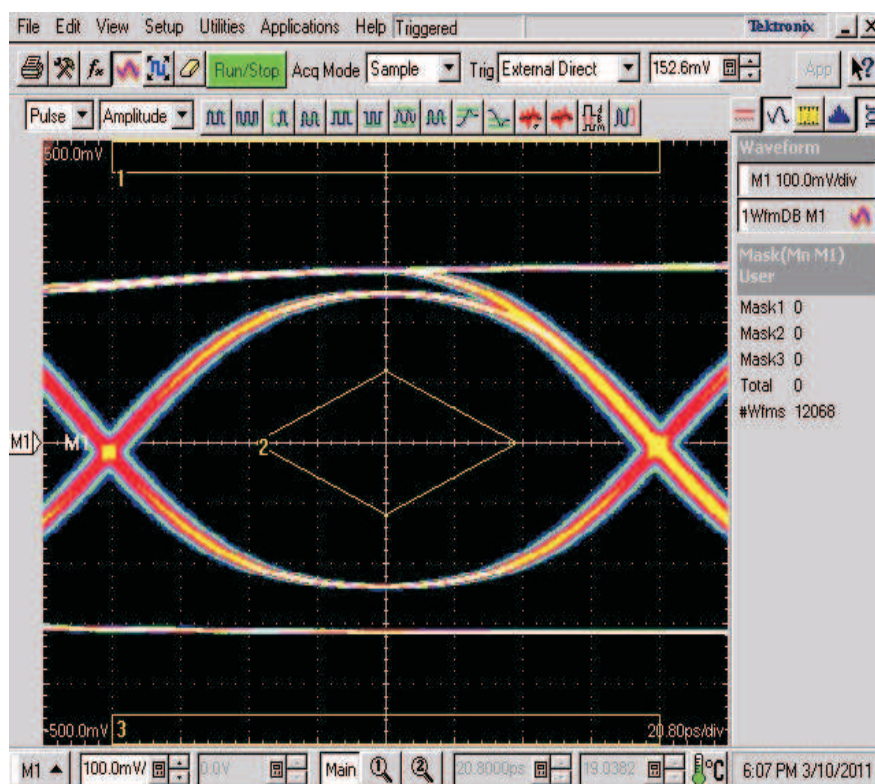


Figure 13. SATA 6.0 Gbps DE= 0, EQ = 1, at Output = 2" after Equalizing (MODE=0)

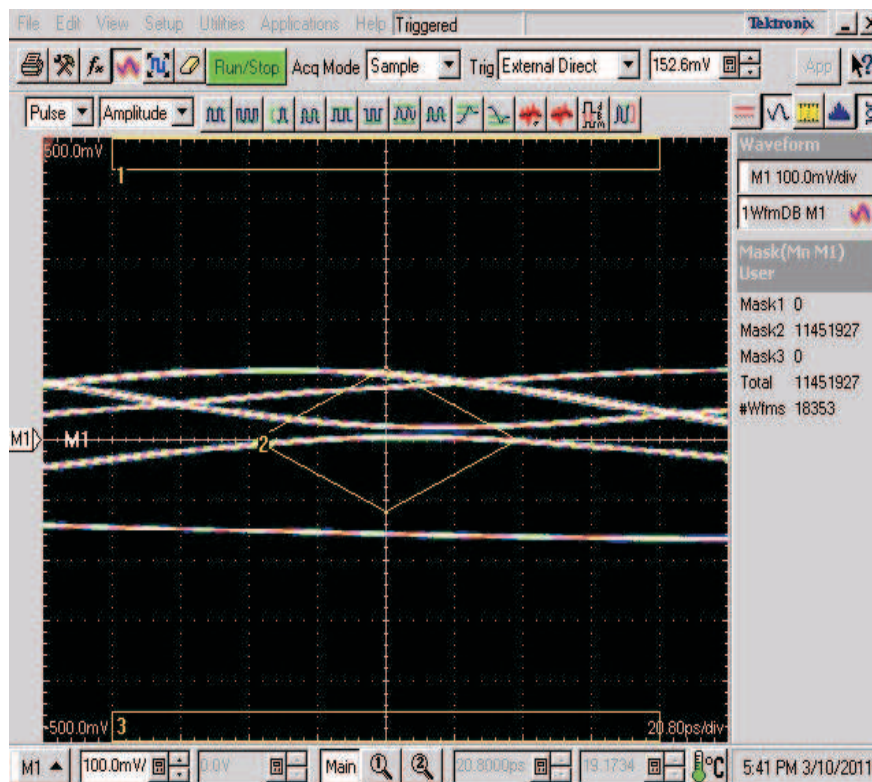


Figure 14. SATA 6.0 Gbps signal after 32" at Input of LVCP600S (MODE=0)

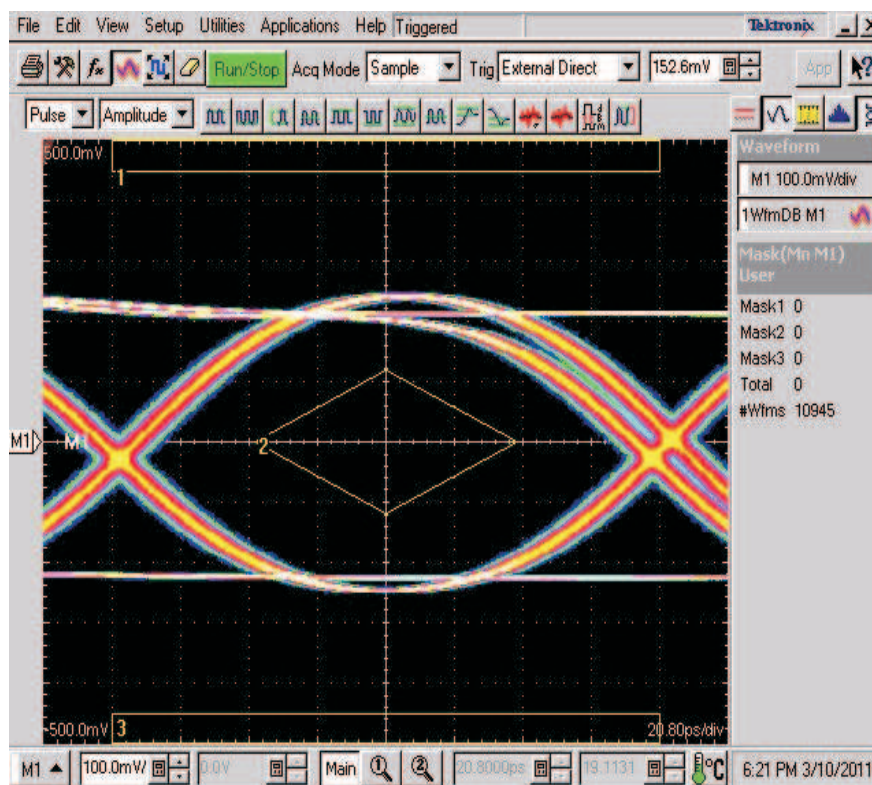


Figure 15. SATA 6.0 Gbps DE= 0, EQ = 1, at Output = 2" after Equalizing (MODE=0)

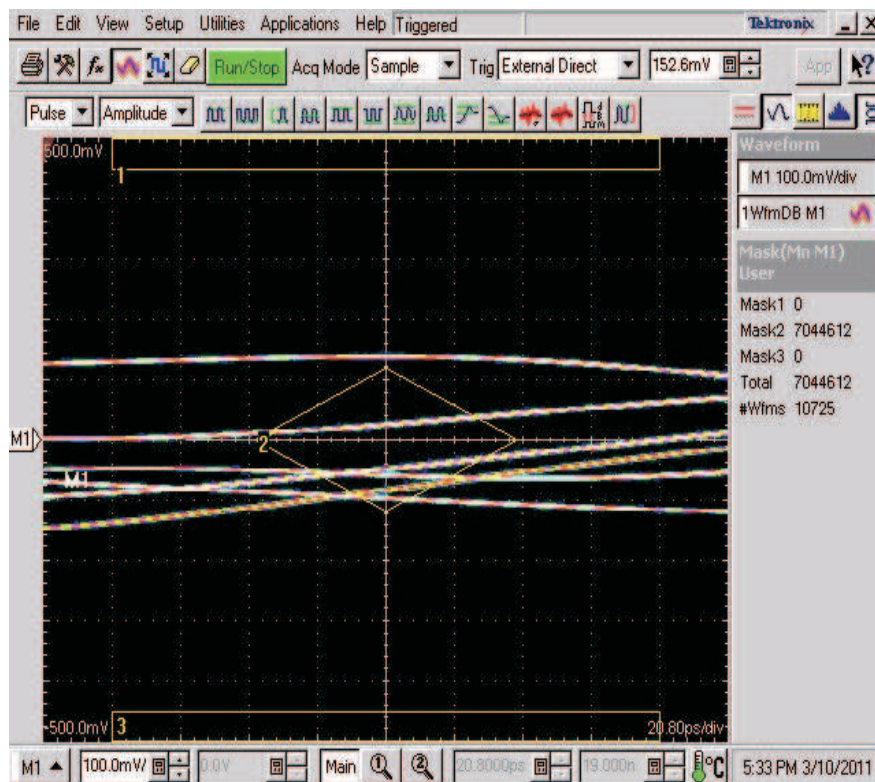


Figure 16. SATA 6.0 Gbps signal after 40" at Input of LVCP600S (MODE=0)

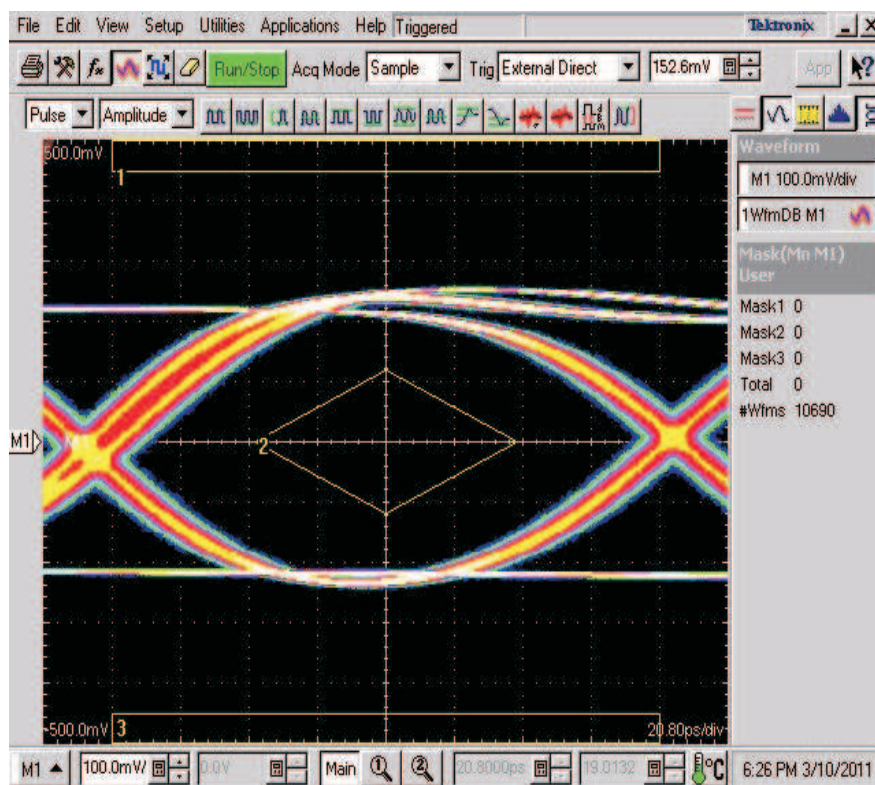


Figure 17. SATA 6.0 Gbps DE= 1, EQ = 1, at Output = 2" after Equalizing (MODE=0)

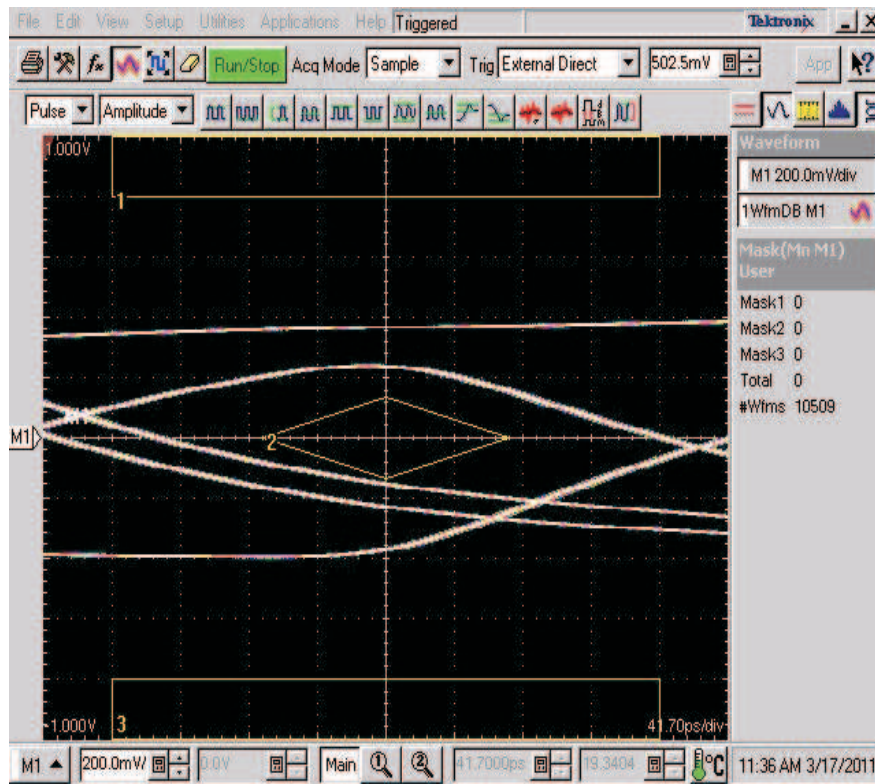


Figure 18. SAS 3.0 Gbps signal after 32" at Input of LVCP600S (MODE=1)

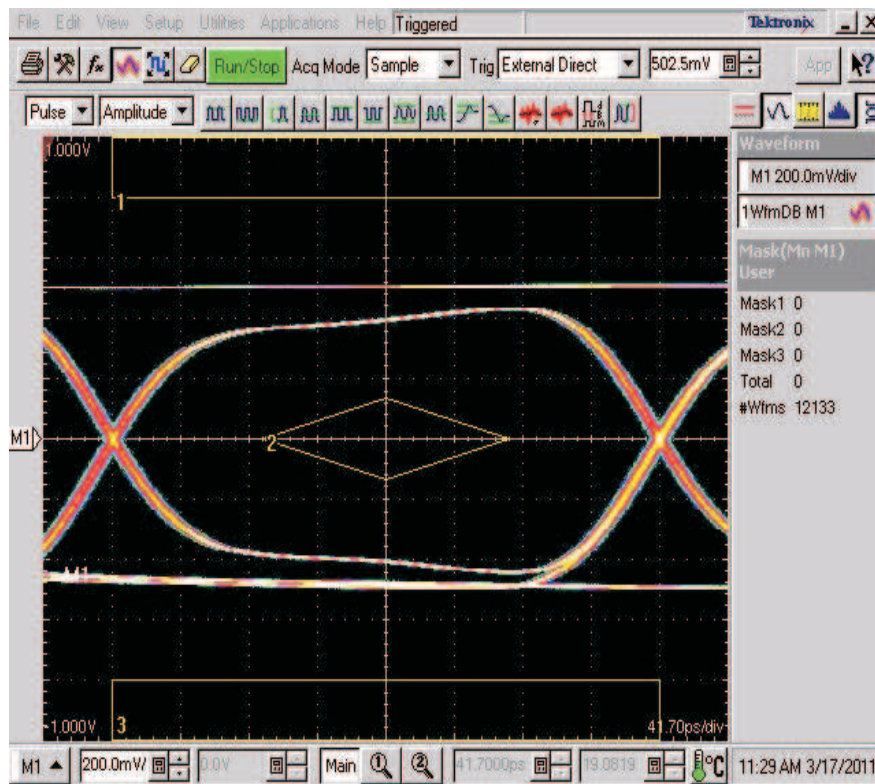


Figure 19. SAS 3.0 Gbps DE= 0, EQ = 1, at Output = 2" after Equalizing (MODE=1)

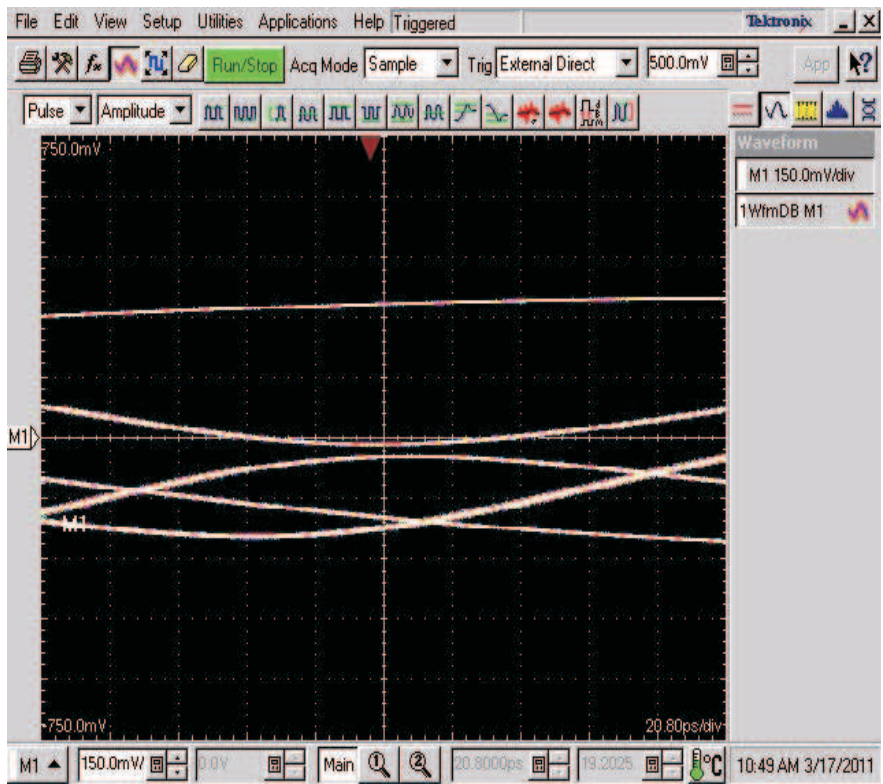


Figure 20. SAS 6.0 Gbps signal after 32" at Input of LVCP600S (MODE=1)

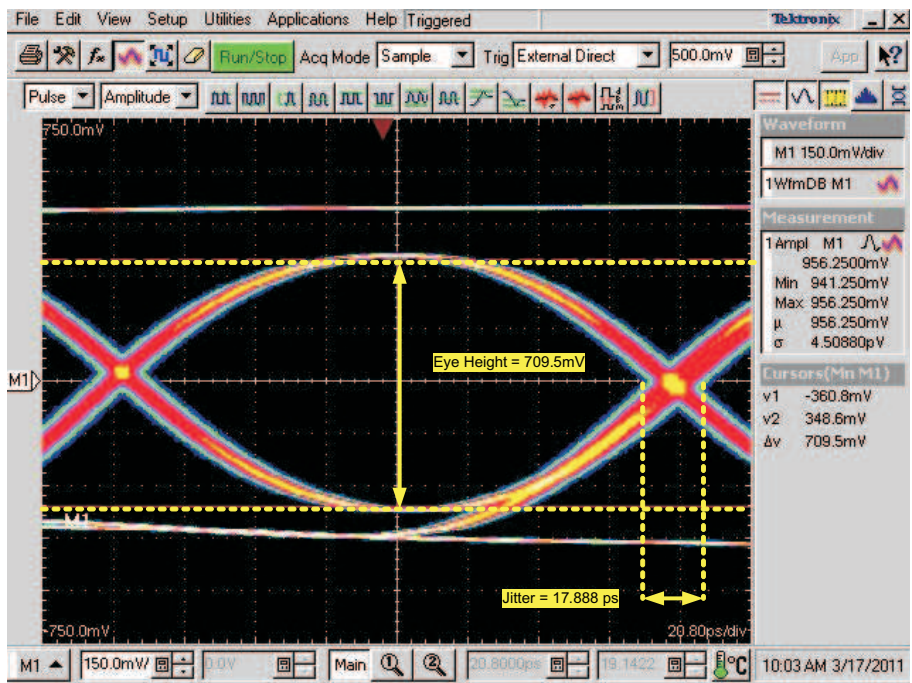


Figure 21. SAS 6.0 Gbps DE= 0, EQ = 1, at Output = 2" after Equalizing (MODE=1)

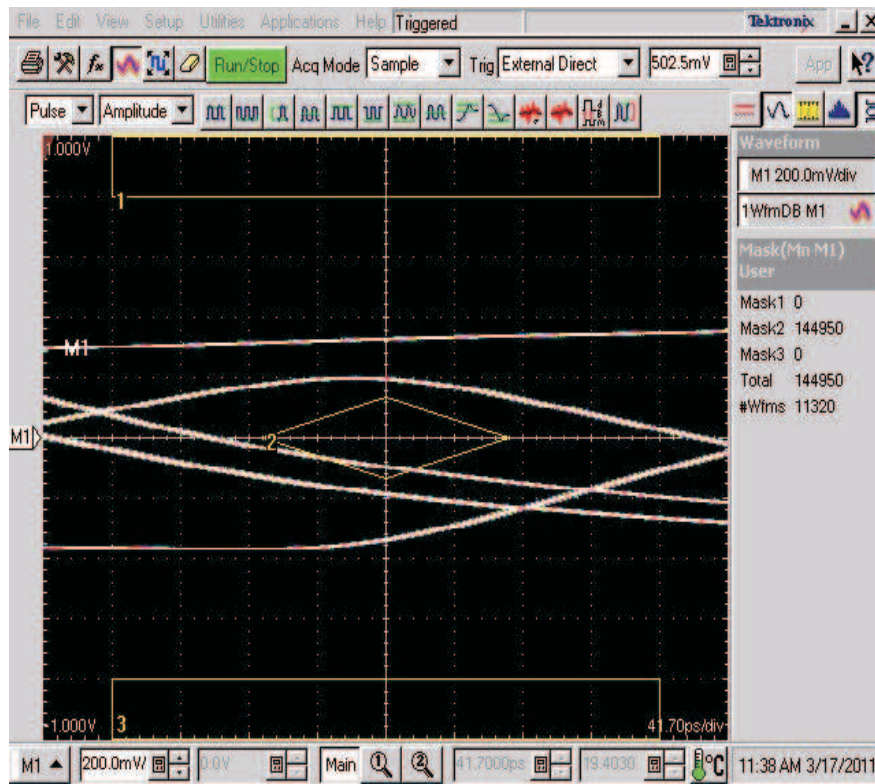


Figure 22. SAS 3.0 Gbps signal after 40" at Input of LVCP600S (MODE=1)

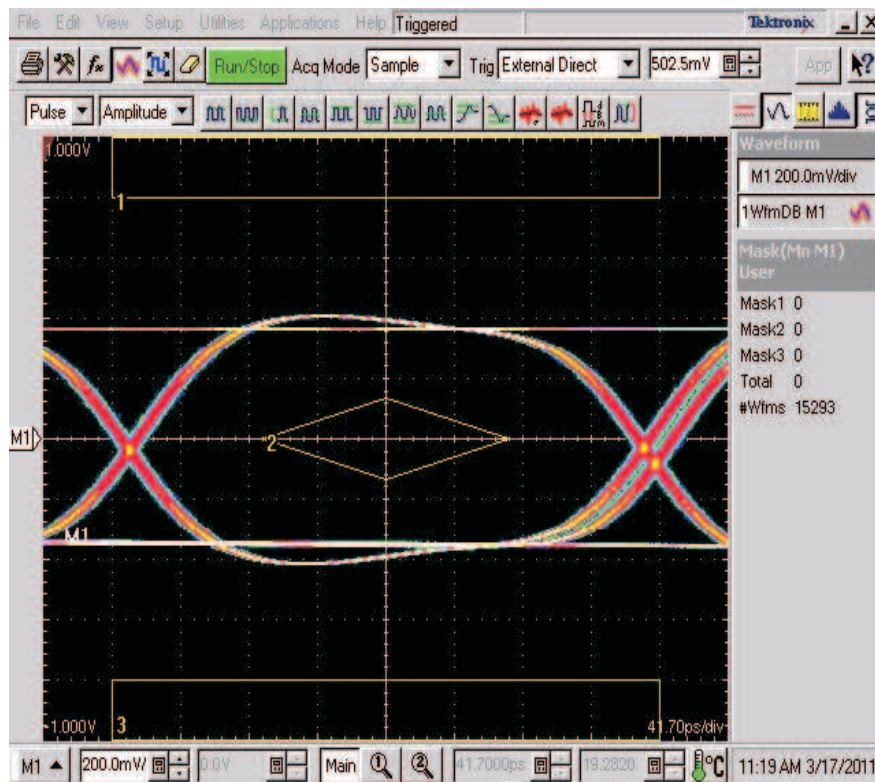


Figure 23. SAS 3.0 Gbps DE= 1, EQ = 1, at Output = 2" after Equalizing (MODE=1)

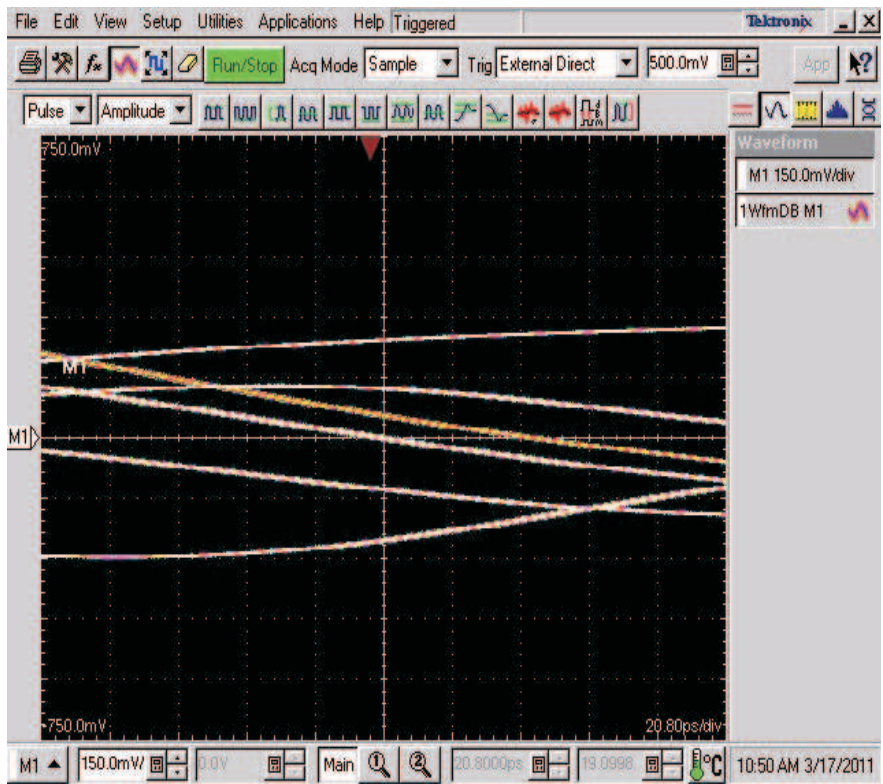


Figure 24. SAS 6.0 Gbps signal after 40" at Input of LVCP600S (MODE=1)

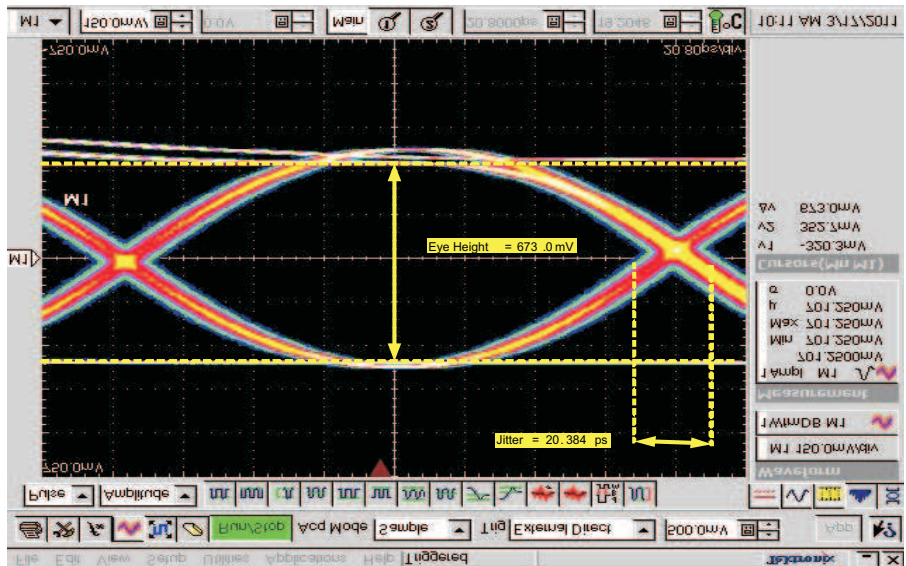


Figure 25. SAS 6.0 Gbps DE= 1, EQ = 1, at Output = 2" after Equalizing (MODE=1)

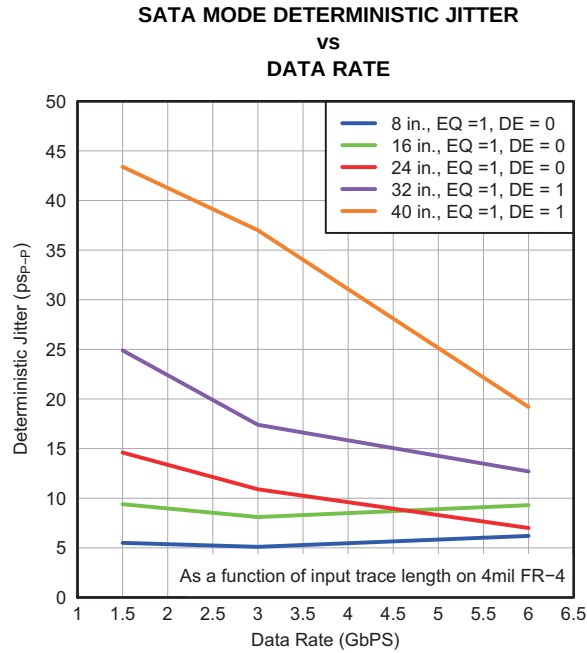


Figure 26.

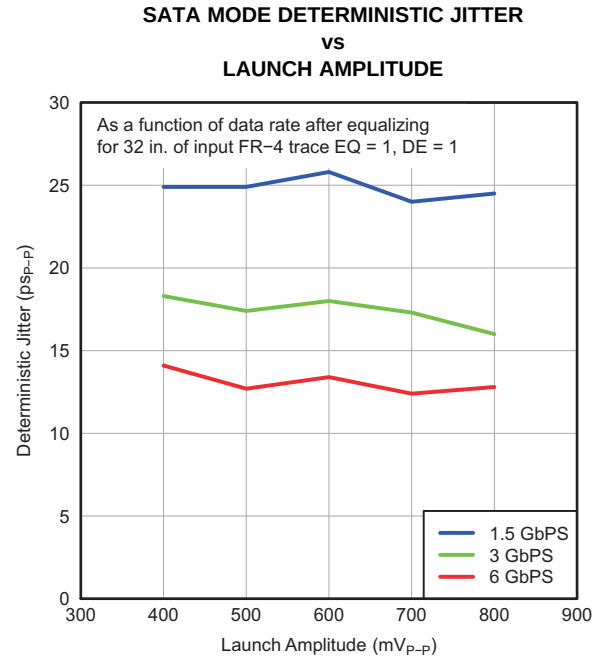


Figure 27.

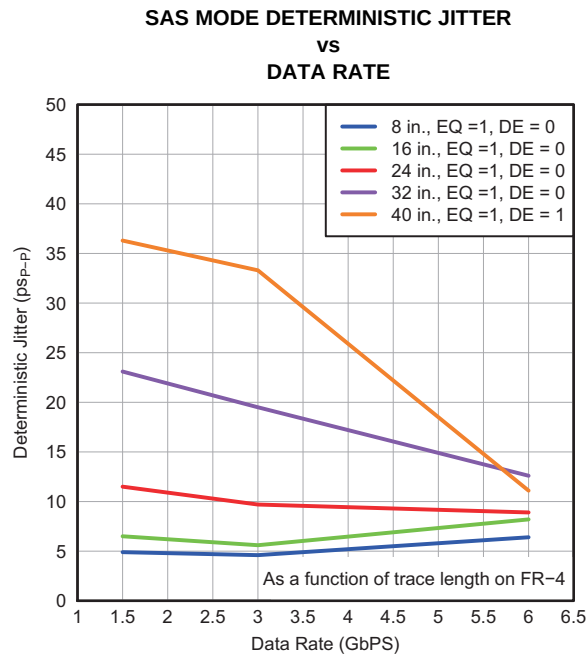


Figure 28.

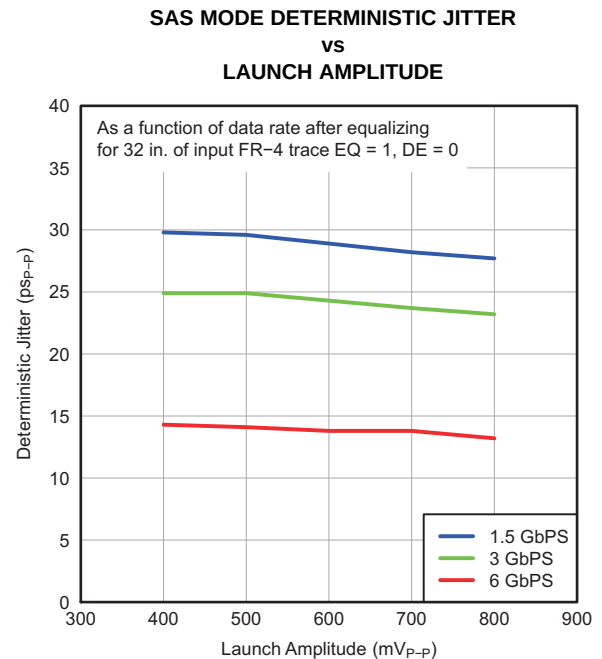


Figure 29.

重要声明

德州仪器(TI) 及其下属子公司有权在不事先通知的情况下, 随时对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权随时中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的硬件产品的性能符合TI 标准保修的适用规范。仅在TI 保证的范围内, 且TI 认为有必要时才会使用测试或其它质量控制技术。除非政府做出了硬性规定, 否则没有必要对每种产品的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何TI 专利权、版权、屏蔽作品权或其它与使用了TI 产品或服务的组合设备、机器、流程相关的TI 知识产权中授予的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从TI 获得使用这些产品或服务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是TI 的专利权或其它知识产权方面的许可。

对于TI 的产品手册或数据表, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况下才允许进行复制。在复制信息的过程中对内容的篡改属于非法的、欺诈性商业行为。TI 对此类篡改过的文件不承担任何责任。

在转售TI 产品或服务时, 如果存在对产品或服务参数的虚假陈述, 则会失去相关TI 产品或服务的明示或暗示授权, 且这是非法的、欺诈性商业行为。TI 对此类虚假陈述不承担任何责任。

TI 产品未获得用于关键的安全应用中的授权, 例如生命支持应用(在该类应用中一旦TI 产品故障将预计造成重大的人员伤亡), 除非各方官员已经达成了专门管控此类使用的协议。购买者的购买行为即表示, 他们具备有关其应用安全以及规章衍生所需的所有专业技术和知识, 并且认可和同意, 尽管任何应用相关信息或支持仍可能由TI 提供, 但他们将独力负责满足在关键安全应用中使用其产品以及TI 产品所需的所有法律、法规和安全相关要求。此外, 购买者必须全额赔偿因在此类关键安全应用中使用TI 产品而对TI 及其代表造成的损失。

TI 产品并非设计或专门用于军事/航空应用, 以及环境方面的产品, 除非TI 特别注明该产品属于“军用”或“增强型塑料”产品。只有TI 指定的军用产品才满足军用规格。购买者认可并同意, 对TI 未指定军用的产品进行军事方面的应用, 风险由购买者单独承担, 并且独力负责在此类相关使用中满足所有法律和法规要求。

TI 产品并非设计或专门用于汽车应用以及环境方面的产品, 除非TI 特别注明该产品符合ISO/TS 16949 要求。购买者认可并同意, 如果他们在汽车应用中使用任何未被指定的产品, TI 对未能满足应用所需要求不承担任何责任。

可访问以下URL 地址以获取有关其它TI 产品和应用解决方案的信息:

产品	应用		
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	http://www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	http://www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	http://www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	http://www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	http://www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	http://www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	http://www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	http://www.ti.com.cn/microcontrollers	无线通信	www.ti.com.cn/wireless
RFID 系统	http://www.ti.com.cn/rfidsys		
RF/IF 和 ZigBee® 解决方案	www.ti.com.cn/radiofre		
TI E2E 工程师社区	http://e2e.ti.com/cn/		

邮寄地址: 上海市浦东新区世纪大道 1568 号, 中建大厦 32 楼 邮政编码: 200122
Copyright © 2011 德州仪器 半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
SN75LVCP600SDSKR	ACTIVE	SON	DSK	10	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	600S	Samples
SN75LVCP600SDSKT	ACTIVE	SON	DSK	10	250	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	600S	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DSK 10

WSON - 0.8 mm max height

2.5 x 2.5 mm, 0.5 mm pitch


PLASTIC SMALL OUTLINE - NO LEAD

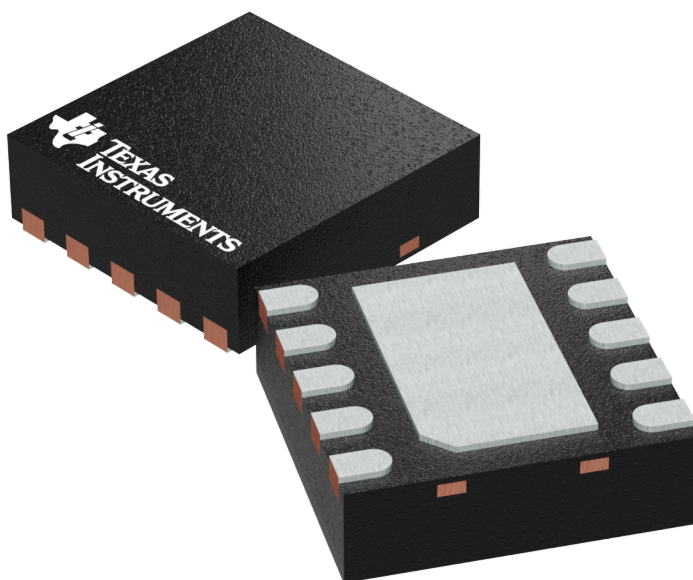

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

DSK (S-PDSO-N10)

PLASTIC QUAD FLATPACK

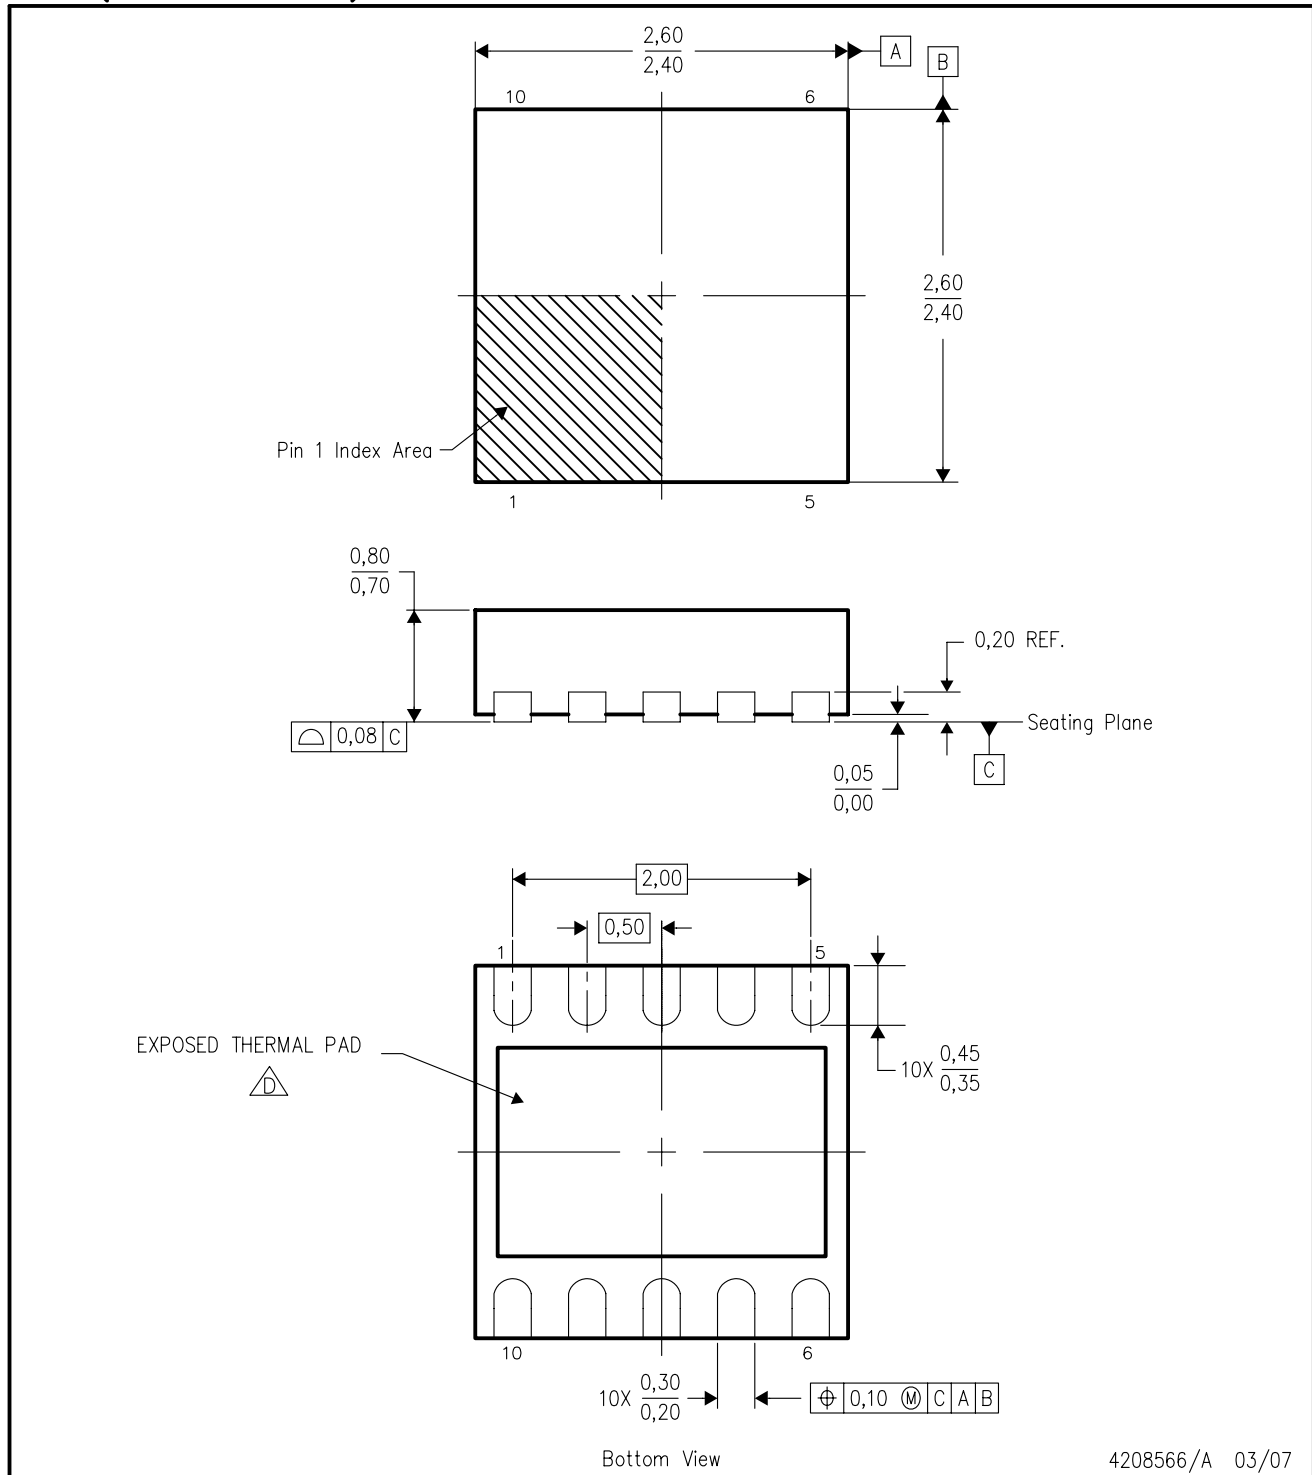

4208566/A 03/07

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Small Outline No-Lead (SON) package configuration.
 -  The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.

THERMAL PAD MECHANICAL DATA

DSK (R-PWSON-N10)


PLASTIC SMALL OUTLINE NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

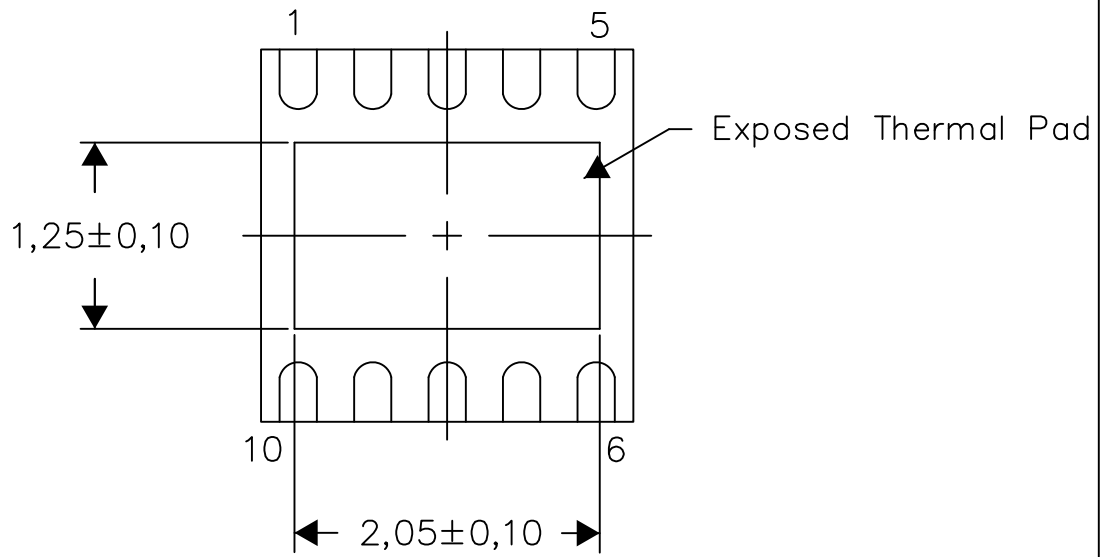

Bottom View


Exposed Thermal Pad Dimensions

4208579-3/E 12/12

NOTE: All linear dimensions are in millimeters

DSK (R-PWSON-N10)

PLASTIC SMALL OUTLINE NO-LEAD

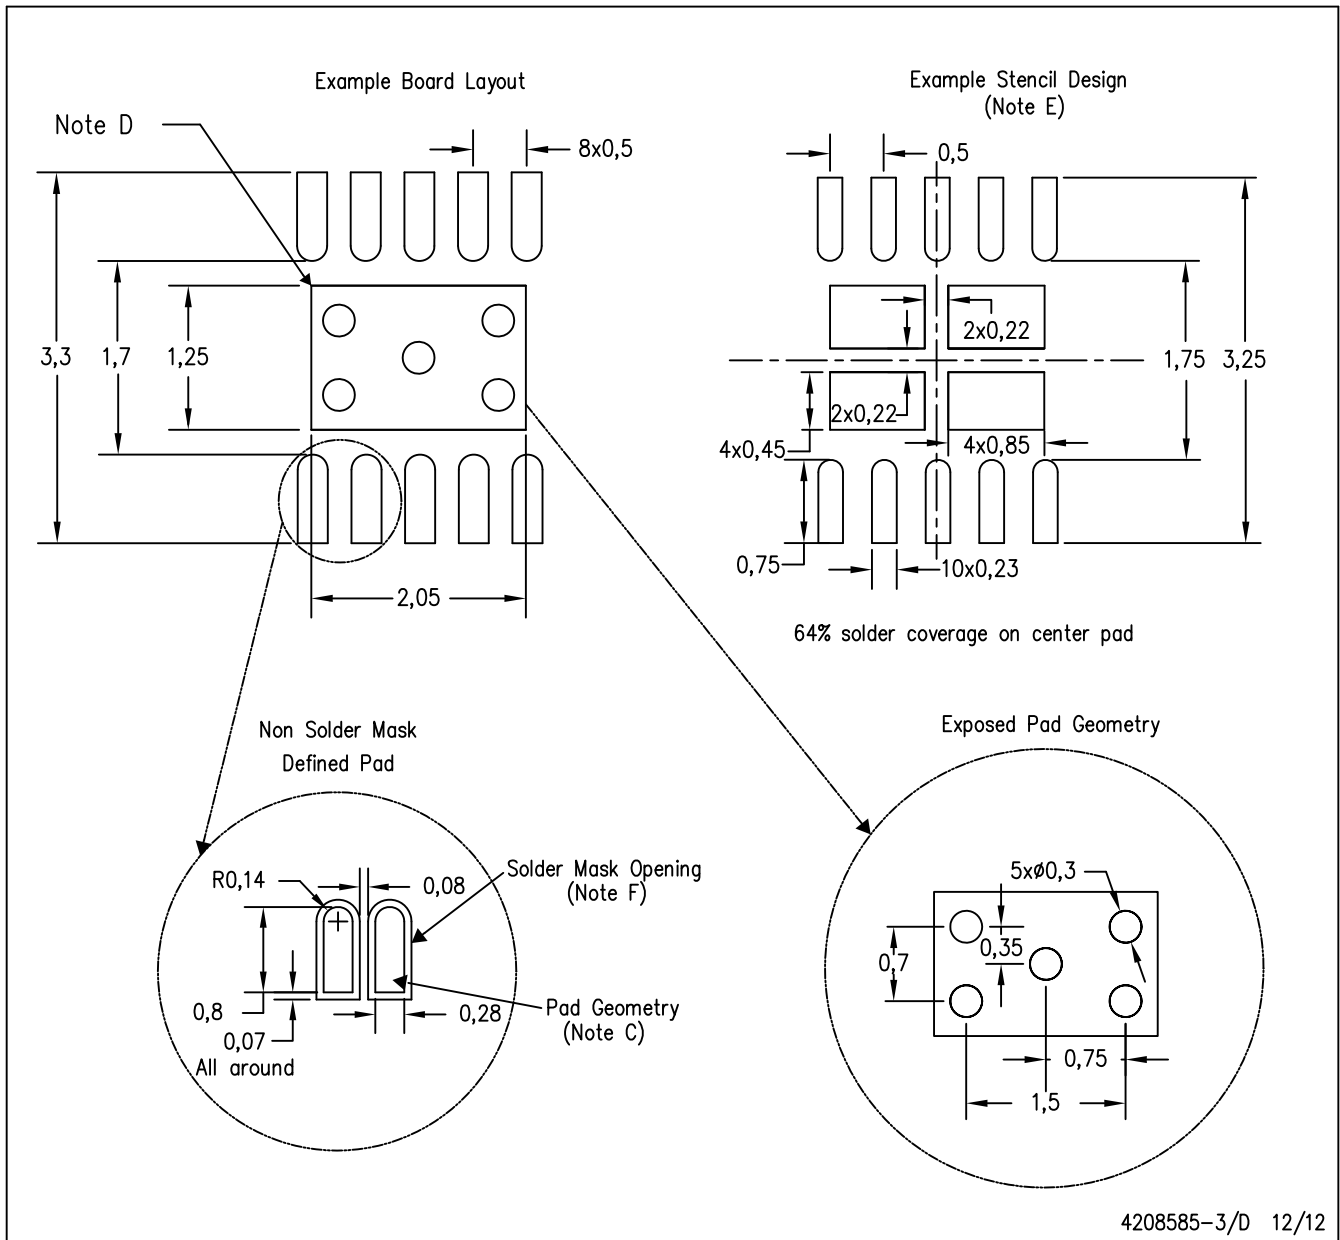

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-SM-782 is recommended for alternate designs.
 - D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
 - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - F. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司