

具有 2.5V、2ppm/°C 内部基准电压的 DAC8560 为 16 位、超低毛刺脉冲、电压输出数模转换器

1 特性

- 相对精度：4 LSB
- 毛刺脉冲能量：0.15nV-s
- 低功耗运行：510μA/2.7V
- 内部基准电压：
 - 2.5V 基准电压（默认为启用）
 - 0.02% 初始精度
 - 2ppm/°C 温漂（典型值）
 - 5ppm/°C 温漂（最大值）
 - 20mA 灌电流/拉电流能力
- 上电复位至零
- 电源电压：2.7V 至 5.5V
- 在整个温度范围具有 16 位单调性
- 建立时间：10μs 达到 ±0.003% FSR
- 具有施密特触发输入的低功耗串口
- 支持轨至轨运行的片上输出缓冲放大器
- 掉电能力
- 与 DAC8531/01 和 DAC8550 /51 直接兼容
- 温度范围：-40°C 至 +105°C
- 采用超小型 8 引脚 VSSOP 封装

2 应用

- 过程控制
- 数据采集系统
- 闭环伺服器控制
- PC 外设
- 便携式仪表

3 说明

DAC8560 是一款低功耗、电压输出、16 位数模转换器 (DAC)。DAC8560 包括 2.5V，2ppm/°C 内部基准电压（默认为启用），可提供范围在 0V 到 2.5V 之间的满量程输出电压。内部基准电压的初始精度为 0.02%，可在 V_{REF} 引脚实现高达 20mA 的拉电流。此器件具有单调性，可提供极佳的线性度，并且大大降低了有害的码字间瞬态电压（毛刺脉冲）。DAC8560 使用一个可运行在高达 30MHz 时钟速率上的多用途 3 线制串行接口。该器件可与标准 SPI、QSPI、Microwire 和数字信号处理器 (DSP) 接口兼容。

DAC8560 包含一个上电复位 (POR) 电路，此电路可确保 DAC 输出为零时上电，并在一段有效代码被写入器件前保持此状态。DAC8560 包含一个由串口访问的断电特性，这将器件在电压为 5V 时的功耗减少至 1.2μA。

此低功耗、集成内部基准电压和小封装尺寸使得这些器件非常适合于便携式、电池供电类设备。电压为 5V 时的功耗为 2.6mW，断电模式下减少到 6μW。


DAC8560 采用 8 引脚 VSSOP 封装。

器件信息⁽¹⁾

| 器件型号 | 封装 | 封装尺寸（标称值） |
|---------|-----------|-----------------|
| DAC8560 | VSSOP (8) | 3.00mm × 3.00mm |

(1) 如需了解所有可用封装，请参阅产品说明书末尾的可订购产品附录。

功能方框图

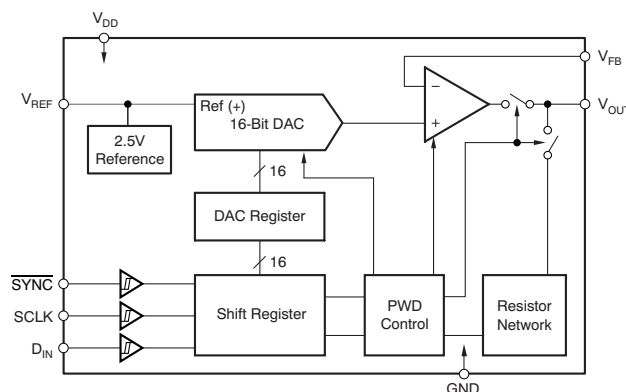

目录

| | | | | | |
|------|---|----|------|--------------------------------------|----|
| 1 | 特性 | 1 | 7.3 | Feature Description | 19 |
| 2 | 应用 | 1 | 7.4 | Device Functional Modes | 24 |
| 3 | 说明 | 1 | 7.5 | Programming | 25 |
| 4 | 修订历史记录 | 2 | 7.6 | Register Maps | 26 |
| 5 | Pin Configuration and Functions | 3 | 8 | Application and Implementation | 27 |
| 6 | Specifications | 4 | 8.1 | Application Information | 27 |
| 6.1 | Absolute Maximum Ratings | 4 | 8.2 | Typical Applications | 27 |
| 6.2 | ESD Ratings | 4 | 9 | Power Supply Recommendations | 32 |
| 6.3 | Recommended Operating Conditions | 4 | 10 | Layout | 32 |
| 6.4 | Thermal Information | 4 | 10.1 | Layout Guidelines | 32 |
| 6.5 | Electrical Characteristics | 5 | 10.2 | Layout Example | 32 |
| 6.6 | Timing Requirements | 7 | 11 | 器件和文档支持 | 33 |
| 6.7 | Typical Characteristics: Internal Reference | 8 | 11.1 | 文档支持 | 33 |
| 6.8 | Typical Characteristics: DAC at $V_{DD} = 5\text{ V}$ | 10 | 11.2 | 接收文档更新通知 | 33 |
| 6.9 | Typical Characteristics: DAC at $V_{DD} = 3.6\text{ V}$ | 15 | 11.3 | 社区资源 | 33 |
| 6.10 | Typical Characteristics: DAC at $V_{DD} = 2.7\text{ V}$ | 15 | 11.4 | 商标 | 33 |
| 7 | Detailed Description | 19 | 11.5 | 静电放电警告 | 33 |
| 7.1 | Overview | 19 | 11.6 | 术语表 | 33 |
| 7.2 | Functional Block Diagram | 19 | 12 | 机械、封装和可订购信息 | 33 |

4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。


| Changes from Revision B (November 2011) to Revision C | Page |
|---|------|
| <ul style="list-style-type: none"> 已添加 在 TI Designs 的器件信息、ESD 额定值、建议运行条件和热性能信息表、特性 说明 部分、器件功能模式、应用和实施 部分、电源相关建议 部分、布局 部分、器件和文档支持 部分以及机械、封装和可订购信息 部分添加了顶部导航链接 | 1 |

| Changes from Revision A (November 2011) to Revision B | Page |
|--|--------|
| <ul style="list-style-type: none"> 已更改 将版本日期从 2011 年 5 月 A 版本更改成了 2011 年 11 月 B 版本 Changed "Zero-code error drift" in the ELEC CHARA table, TYP from ± 20 to ± 4 | 1 5 |

| Changes from Original (December 2006) to Revision A | Page |
|--|--------|
| <ul style="list-style-type: none"> Changed Output Voltage parameter min/max values from 2.4995 and 2.5005 to 2.4975 and 2.5025, respectively Changed Initial Accuracy parameter min/max values from -0.02 and 0.02 to -0.1 and 0.1, respectively | 6 6 |

| Changes from Revision A (May 2011) to Revision B | Page |
|--|--------|
| <ul style="list-style-type: none"> 已更改 将版本日期从 2011 年 5 月 A 版本更改成了 2011 年 11 月 B 版本 Changed "Zero-code error drift" in the ELEC CHARA table, TYP from ± 20 to ± 4 | 1 5 |

5 Pin Configuration and Functions

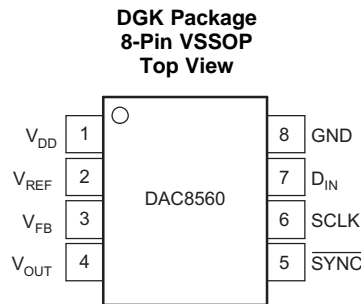

Pin Functions

| PIN | | I/O | DESCRIPTION |
|-----|--------------------------|-----|--|
| NO. | NAME | | |
| 1 | V _{DD} | PWR | Power supply input, 2.7 V to 5.5 V |
| 2 | V _{REF} | I/O | Reference voltage input/output |
| 3 | V _{FB} | I | Feedback connection for the output amplifier. For voltage output operation, tie to V _{OUT} externally. |
| 4 | V _{OUT} | O | Analog output voltage from DAC. The output amplifier has rail-to-rail operation. |
| 5 | $\overline{\text{SYNC}}$ | I | Level-triggered control input (active LOW). This is the frame synchronization signal for the input data. When $\overline{\text{SYNC}}$ goes LOW, it enables the input shift register, and data is sampled on subsequent falling clock edges. The DAC output updates following the 24th clock. If $\overline{\text{SYNC}}$ is taken HIGH before the 24th clock edge, the rising edge of $\overline{\text{SYNC}}$ acts as an interrupt, and the write sequence is ignored by the DAC8560. Schmitt-Trigger logic input. |
| 6 | SCLK | I | Serial clock input, Schmitt-Trigger logic input. |
| 7 | D _{IN} | I | Serial data input. Data is clocked into the 24-bit input shift register on each falling edge of the serial clock input. Schmitt-Trigger logic input. |
| 8 | GND | GND | Ground reference point for all circuitry on the device. |

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | MIN | MAX | UNIT |
|------------------------------------|------|--------------------------------------|------|
| V_{DD} to GND | –0.3 | 6 | V |
| Digital input voltage to GND | –0.3 | $V_{DD} + 0.3$ | V |
| V_{OUT} to GND | –0.3 | $V_{DD} + 0.3$ | V |
| Power dissipation (DGK) | | $(T_{J(MAX)} - T_A) / R_{\theta JA}$ | |
| Operating temperature | –40 | 105 | °C |
| Junction temperature, $T_{J(MAX)}$ | | 150 | °C |
| Storage temperature, T_{stg} | –65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

| | | VALUE | UNIT |
|-------------------------------------|--|-------|------|
| $V_{(ESD)}$ Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±4000 | V |
| | Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±1500 | |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | MIN | NOM | MAX | UNIT |
|--|-----|-----------|----------|------|
| V_{DD} Supply voltage (V_{DD} to GND) | 2.7 | | 5.5 | V |
| Digital input voltage (D_{IN} , SCLK, and \overline{SYNC}) | 0 | | V_{DD} | V |
| V_{FB} Output amplifier feedback input | | V_{OUT} | | V |
| T_A Operating ambient temperature | –40 | | 125 | °C |

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | DAC8560 | UNIT |
|-------------------------------|--|-------------|------|
| | | DGK (VSSOP) | |
| | | 8 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 206 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 44 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 94.2 | °C/W |
| Ψ_{JT} | Junction-to-top characterization parameter | 10.2 | °C/W |
| Ψ_{JB} | Junction-to-board characterization parameter | 92.7 | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

$V_{DD} = 2.7\text{ V to }5.5\text{ V}$, $-40^{\circ}\text{C to }+105^{\circ}\text{C}$ range (unless otherwise noted)

| PARAMETER | | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------------------|---|--------------------|-----------------|-----|-------|------------------|------------------|
| STATIC PERFORMANCE ⁽¹⁾ | | | | | | | |
| Resolution | | | | 16 | | | Bits |
| Relative accuracy | Measured by line passing through codes 485 and 64714 | DAC8560A, DAC8560C | | | ±4 | ±12 | LSB |
| | | DAC8560B, DAC8560D | | | ±4 | ±8 | LSB |
| Differential nonlinearity | 16-bit Monotonic | | | | ±0.5 | ±1 | LSB |
| Zero-code error | Measured by line passing through codes 485 and 64714. | | | | ±5 | ±12 | mV |
| Full-scale error | | | | | ±0.2 | ±0.5 | % of FSR |
| Gain error | | | | | ±0.05 | ±0.2 | % of FSR |
| Zero-code error drift | | | | | ±4 | | μV/°C |
| Gain temperature coefficient | V _{DD} = 5 V | | | | ±1 | | ppm of FSR/°C |
| | V _{DD} = 2.7 V | | | | ±3 | | |
| PSRR | Power supply rejection ratio | Output unloaded | | | 1 | | mV/V |
| OUTPUT CHARACTERISTICS ⁽²⁾ | | | | | | | |
| Output voltage range | | | | 0 | | V _{REF} | V |
| Output voltage settling time | To ±0.003% FSR, 0200h to FD00h, R _L = 2 kΩ, 0 pF < C _L < 200 pF | | | | 8 | 10 | μs |
| | R _L = 2 kΩ, C _L = 500 pF | | | | 12 | | |
| Slew rate | | | | | 1.8 | | V/μs |
| Capacitive load stability | R _L = ∞ | | | | 470 | | pF |
| | R _L = 2 kΩ | | | | 1000 | | |
| Code change glitch impulse | 1 LSB change around major carry | | | | 0.15 | | nV-s |
| Digital feedthrough | SCLK toggling, $\overline{\text{SYNC}}$ high | | | | 0.15 | | nV-s |
| DC output impedance | At mid-code input | | | | 1 | | Ω |
| Short-circuit current | V _{DD} = 5 V | | | | 50 | | mA |
| | V _{DD} = 3 V | | | | 20 | | |
| Power-up time | Coming out of power-down mode V _{DD} = 5 V | | | | 2.5 | | μs |
| | Coming out of power-down mode V _{DD} = 3 V | | | | 5 | | |
| AC PERFORMANCE ⁽²⁾ | | | | | | | |
| SNR | T _A = 25°C, BW = 20 kHz, V _{DD} = 5 V, f _{OUT} = 1 kHz, 1st 19 harmonics removed for SNR calculation | | | | 88 | | dB |
| THD | | | | | -77 | | dB |
| SFDR | | | | | 79 | | dB |
| SINAD | | | | | 77 | | dB |
| DAC output noise density | T _A = 25°C, at mid-code input, f _{OUT} = 1 kHz | | | | 170 | | nV/√Hz |
| DAC output noise | T _A = 25°C, at mid-code input, 0.1 Hz to 10 Hz | | | | 50 | | μV _{PP} |

(1) Linearity calculated using a reduced code range of 485 to 64714; output unloaded.

(2) Ensured by design and characterization, not production tested.

Electrical Characteristics (continued)

 $V_{DD} = 2.7\text{ V to }5.5\text{ V}$, $-40^{\circ}\text{C to }+105^{\circ}\text{C}$ range (unless otherwise noted)

| PARAMETER | | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--------------------------|---|-----------------|--------|---------|-----------------|------------------|
| REFERENCE OUTPUT | | | | | | | |
| Output voltage | | T _A = 25°C | | 2.4975 | 2.5 | 2.5025 | V |
| Initial accuracy | | T _A = 25°C | | −0.1% | ±0.004% | 0.1% | |
| Output voltage temperature drift | | DAC8560A, DAC8560B ⁽³⁾ | | | 5 | 25 | ppm/°C |
| | | DAC8560C, DAC8560D ⁽⁴⁾ | | | 2 | 5 | |
| Output voltage noise | | f = 0.1 Hz to 10 Hz | | | 16 | | μV _{PP} |
| Output voltage noise density (high-frequency noise) | | T _A = 25°C, f = 1 MHz, C _L = 0 μF | | | 125 | | nV/√Hz |
| | | T _A = 25°C, f = 1 MHz, C _L = 1 μF | | | 20 | | |
| | | T _A = 25°C, f = 1 MHz, C _L = 4 μF | | | 2 | | |
| Load regulation, sourcing ⁽⁵⁾ | | T _A = 25°C | | | 30 | | μV/mA |
| Load regulation, sinking ⁽⁵⁾ | | T _A = 25°C | | | 15 | | μV/mA |
| Output current load capability ⁽²⁾ | | | | | ±20 | | mA |
| Line regulation | | T _A = 25°C | | | 10 | | μV/V |
| Long-term stability/drift (aging) ⁽⁵⁾ | | T _A = 25°C, time = 0 to 1900 hours | | | 50 | | ppm |
| Thermal hysteresis ⁽⁵⁾ | | First cycle | | | 100 | | ppm |
| | | Additional cycles | | | 25 | | |
| REFERENCE | | | | | | | |
| Internal reference current consumption | | V _{DD} = 5.5 V | | | 360 | | μA |
| | | V _{DD} = 3.6 V | | | 348 | | |
| External reference current | | External V _{REF} = 2.5 V, if internal reference is disabled | | | 20 | | μA |
| Reference input range | | | | 0 | | V _{DD} | V |
| Reference input impedance | | | | | 125 | | kΩ |
| LOGIC INPUTS ⁽²⁾ | | | | | | | |
| Input current | | | | | ±1 | | μA |
| V _{INL} | Logic input LOW voltage | V _{DD} = 5 V | | | | 0.8 | V |
| | | V _{DD} = 3 V | | | | 0.6 | |
| V _{INH} | Logic input HIGH voltage | V _{DD} = 5 V | | 2.4 | | | V |
| | | V _{DD} = 3 V | | 2.1 | | | |
| Pin capacitance | | | | | | 3 | pF |
| POWER REQUIREMENTS | | | | | | | |
| V _{DD} | | | | 2.7 | | 5.5 | V |
| I _{DD} ⁽⁶⁾ | Normal mode | V _{DD} = 3.6 V to 5.5 V, V _{IH} = V _{DD} and V _{IL} = GND | | | 0.53 | 0.85 | mA |
| | | V _{DD} = 2.7 V to 3.6 V, V _{IH} = V _{DD} and V _{IL} = GND | | | 0.51 | 0.84 | |
| | All power-down modes | V _{DD} = 3.6 V to 5.5 V, V _{IH} = V _{DD} and V _{IL} = GND | | | 1.2 | 2.5 | μA |
| | | V _{DD} = 2.7 V to 3.6 V, V _{IH} = V _{DD} and V _{IL} = GND | | | 0.7 | 2.2 | |
| Power dissipation ⁽⁶⁾ | Normal mode | V _{DD} = 3.6 V to 5.5 V | | | 2.6 | 4.7 | mW |
| | | V _{DD} = 2.7 V to 3.6 V | | | 1.5 | 3 | |
| | All power-down modes | V _{DD} = 3.6 V to 5.5 V | | | 6 | 14 | μW |
| | | V _{DD} = 2.7 V to 3.6 V | | | 2 | 8 | |
| TEMPERATURE RANGE | | | | | | | |
| Specified performance | | | | −40 | | 105 | °C |

(3) Reference is trimmed and tested at room temperature, and is characterized from -40°C to $+120^{\circ}\text{C}$.

(4) Reference is trimmed and tested at two temperatures (25°C and 105°C), and is characterized from -40°C to $+120^{\circ}\text{C}$.

(5) Explained in more detail in [Application and Implementation](#).

(6) Input code = 32768, reference current included, no load.

6.6 Timing Requirements

$V_{DD} = 2.7\text{ V to }5.5\text{ V}$, all specifications $-40^{\circ}\text{C to }+105^{\circ}\text{C}$ (unless otherwise noted)^{(1) (2)}

| PARAMETER | | MIN | NOM | MAX | UNIT |
|---|---|------|-----|-----|------|
| $t_1^{(3)}$ SCLK cycle time | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 50 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 33 | | | |
| t_2 SCLK HIGH time | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 13 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 13 | | | |
| t_3 SCLK LOW time | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 22.5 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 13 | | | |
| t_4 $\overline{\text{SYNC}}$ to SCLK rising edge setup time | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 0 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 0 | | | |
| t_5 Data setup time | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 5 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 5 | | | |
| t_6 Data hold time | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 4.5 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 4.5 | | | |
| t_7 SCLK falling edge to $\overline{\text{SYNC}}$ rising edge | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 0 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 0 | | | |
| t_8 Minimum $\overline{\text{SYNC}}$ HIGH time | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 50 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 33 | | | |
| t_9 24th SCLK falling edge to $\overline{\text{SYNC}}$ falling edge | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 100 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 100 | | | |
| t_{10} $\overline{\text{SYNC}}$ rising edge to 24th SCLK falling edge (for successful SYNC interrupt) | $V_{DD} = 2.7\text{ V to }3.6\text{ V}$ | 15 | | | ns |
| | $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ | 15 | | | |

- (1) All input signals are specified with $t_R = t_F = 3\text{ ns}$ (10% to 90% of V_{DD}) and timed from a voltage level of $(V_{IL} + V_{IH}) / 2$.
(2) See [Figure 1](#).
(3) Maximum SCLK frequency is 3 0MHz at $V_{DD} = 3.6\text{ V to }5.5\text{ V}$ and 20 MHz at $V_{DD} = 2.7\text{ V to }3.6\text{ V}$.

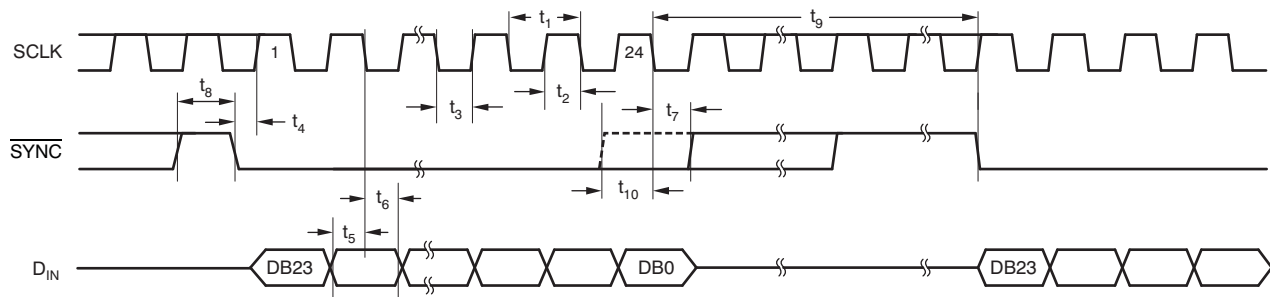


Figure 1. Serial Write Operation

6.7 Typical Characteristics: Internal Reference

At $T_A = 25^\circ\text{C}$, unless otherwise noted.

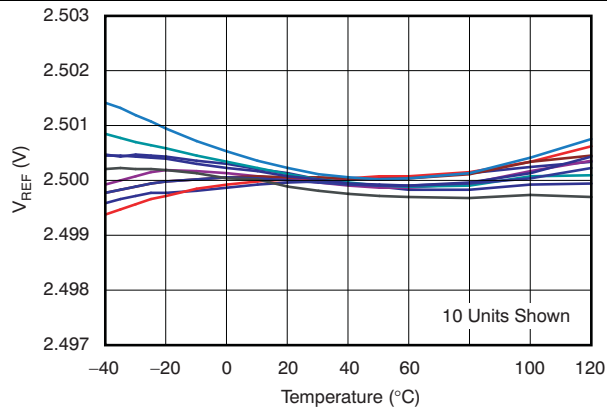


Figure 2. Internal Reference Voltage vs Temperature (Grades C and D)

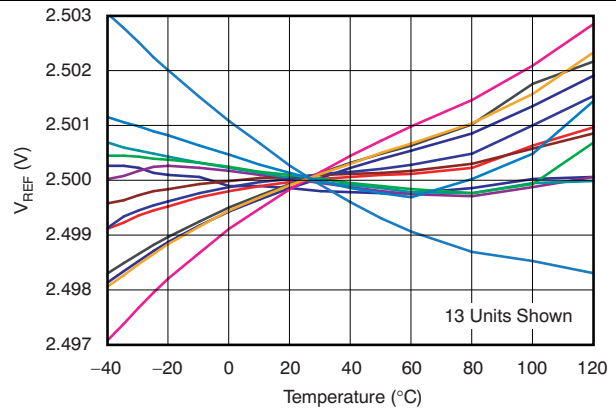


Figure 3. Internal Reference Voltage vs Temperature (Grades A and B)

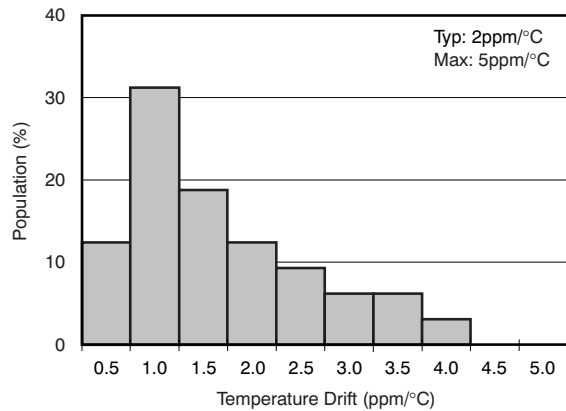


Figure 4. Reference Output Temperature Drift (-40°C to 120°C, Grades C and D)

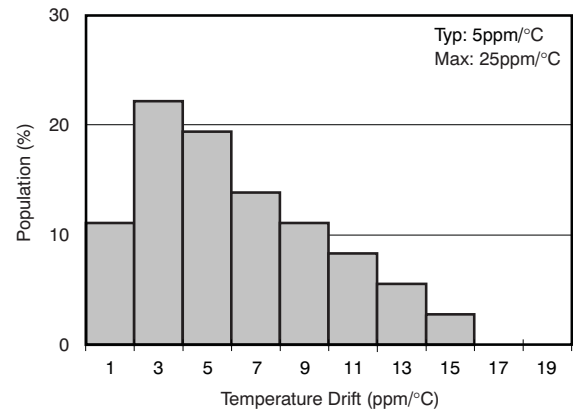


Figure 5. Reference Output Temperature Drift (-40°C to 120°C, Grades A and B)


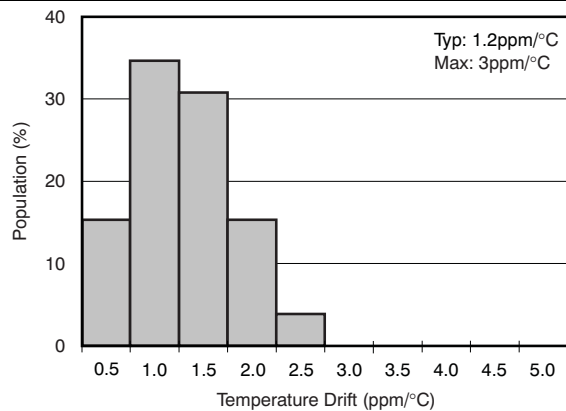


Figure 6. Reference Output Temperature Drift (0°C to 120°C, Grades C and D)

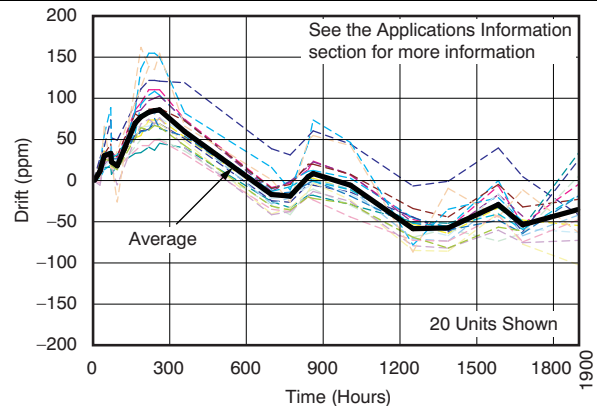


Explained in more detail in [Application and Implementation](#).

Figure 7. Long-Term Stability/Drift ⁽¹⁾

(1)


Typical Characteristics: Internal Reference (continued)

At $T_A = 25^\circ\text{C}$, unless otherwise noted.

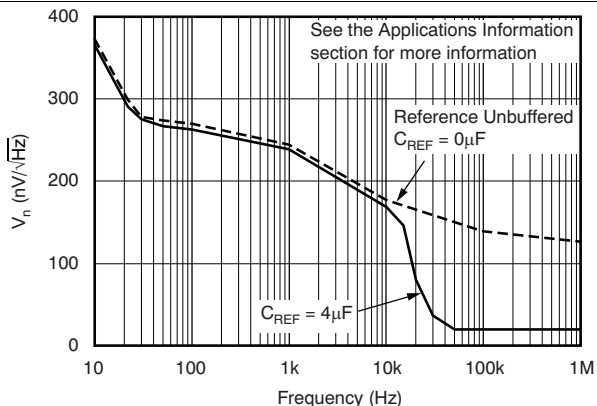

Explained in more detail in [Application and Implementation](#).

Figure 8. Internal Reference Noise Density vs Frequency

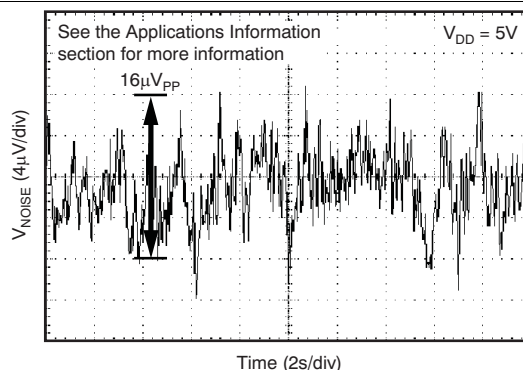

Explained in more detail in [Application and Implementation](#).

Figure 9. Internal Reference Noise 0.1 Hz to 10 Hz

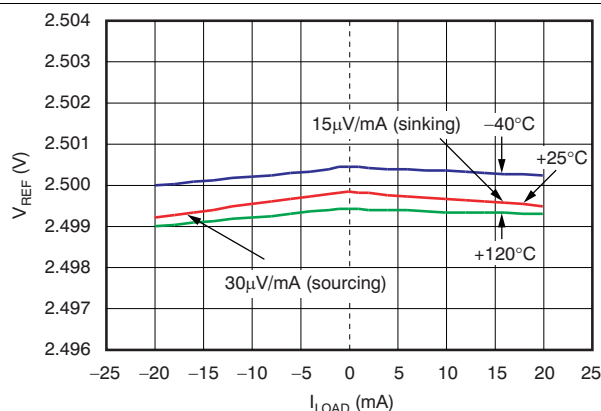


Figure 10. Internal Reference Voltage vs Load Current (Grades C and D)

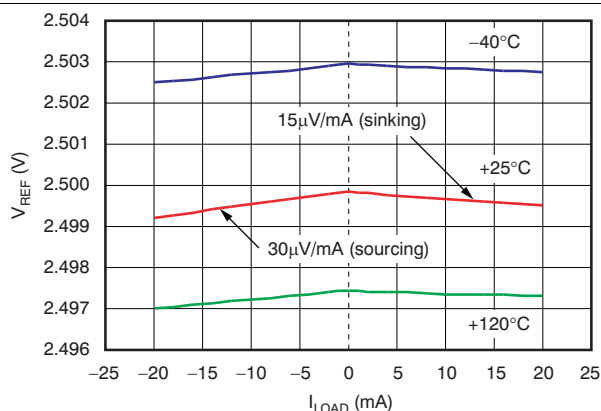


Figure 11. Internal Reference Voltage vs Load Current (Grades A and B)

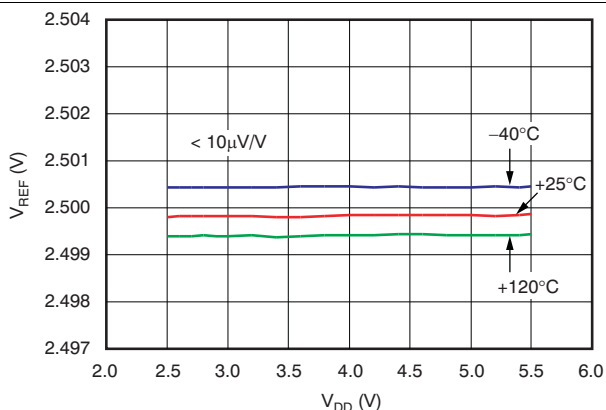


Figure 12. Internal Reference Voltage vs Supply Voltage (Grades C and D)

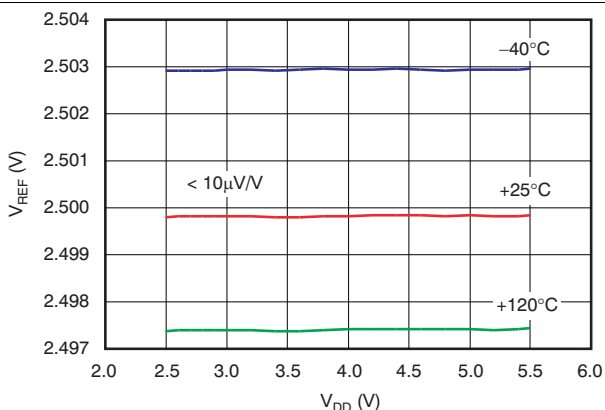


Figure 13. Internal Reference Voltage vs Supply Voltage (Grades A and B)

6.8 Typical Characteristics: DAC at $V_{DD} = 5\text{ V}$

At $T_A = 25^\circ\text{C}$, external reference used, and DAC output not loaded, unless otherwise noted.

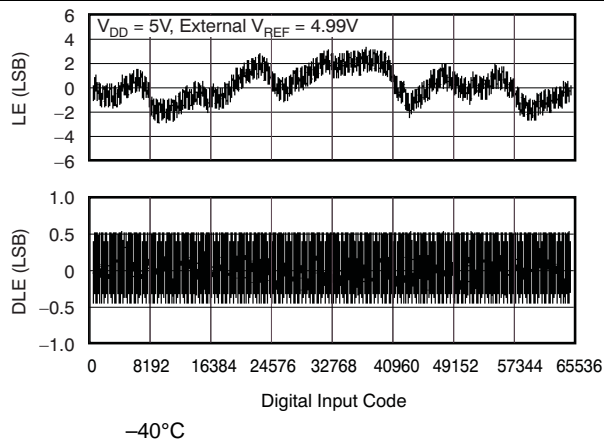


Figure 14. Linearity Error and Differential Linearity Error vs Digital Input Code

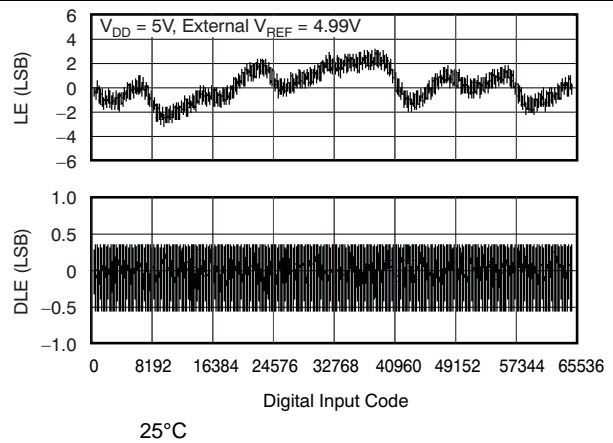


Figure 15. Linearity Error and Differential Linearity Error vs Digital Input Code

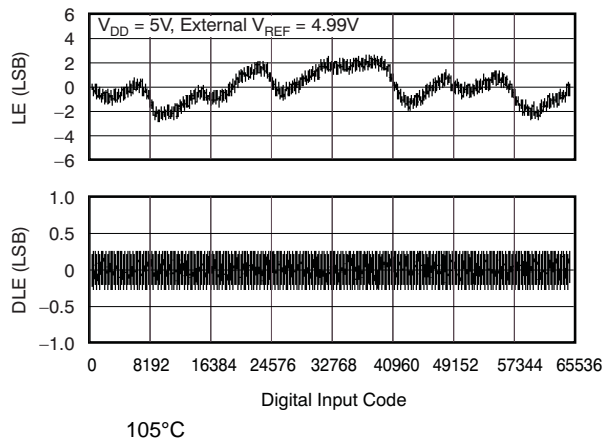


Figure 16. Linearity Error and Differential Linearity Error vs Digital Input Code

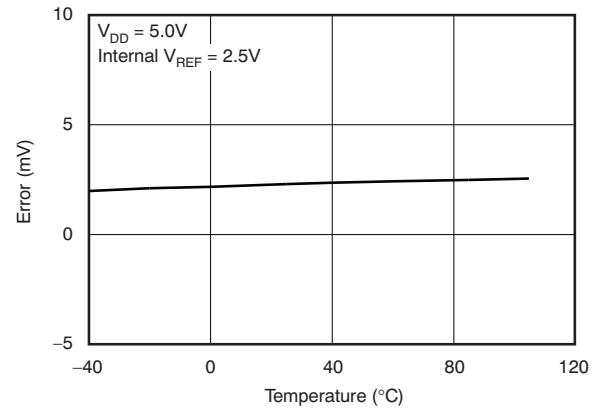


Figure 17. Zero-Scale Error vs Temperature

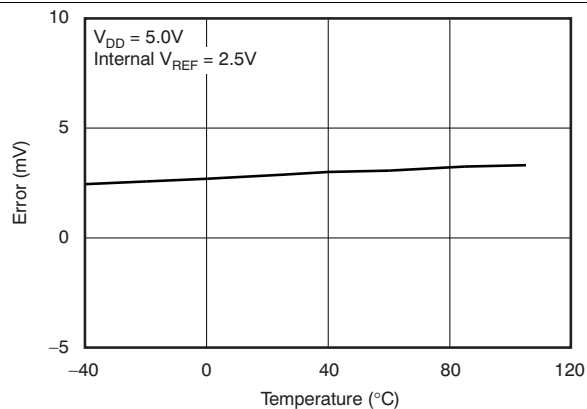


Figure 18. Full-Scale Error vs Temperature

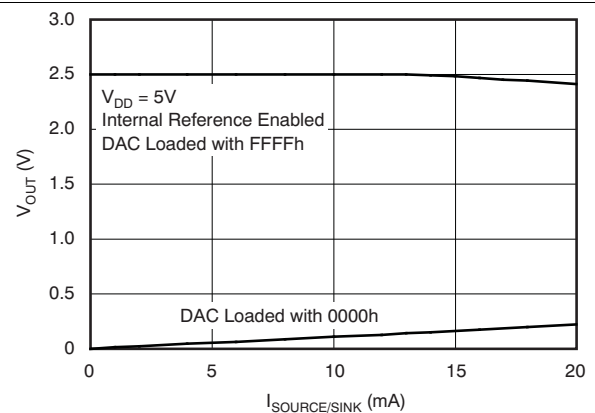


Figure 19. Source and Sink Current Capability

Typical Characteristics: DAC at $V_{DD} = 5\text{ V}$ (continued)

At $T_A = 25^\circ\text{C}$, external reference used, and DAC output not loaded, unless otherwise noted.

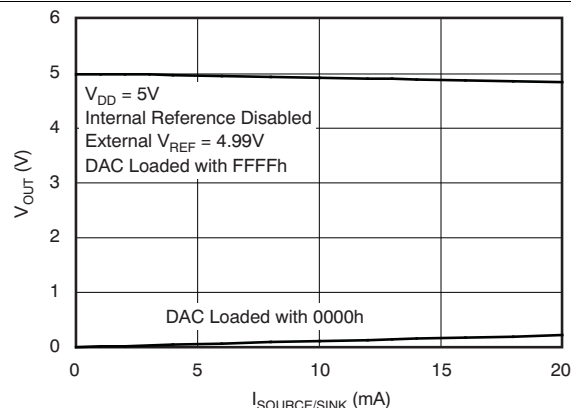


Figure 20. Source and Sink Current Capability

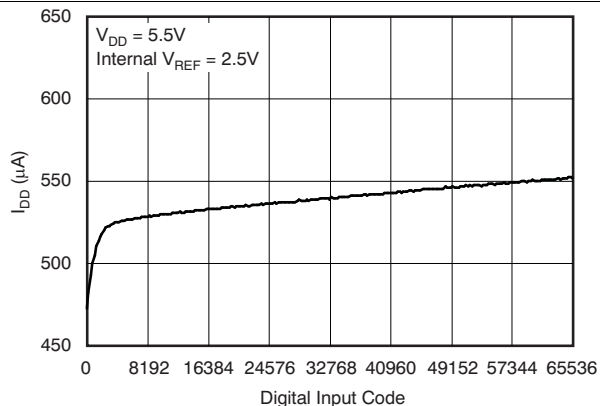


Figure 21. Power-Supply Current vs Digital Input Code

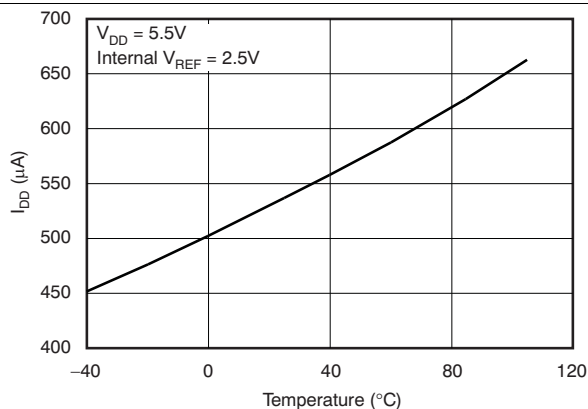


Figure 22. Power-Supply Current vs Temperature

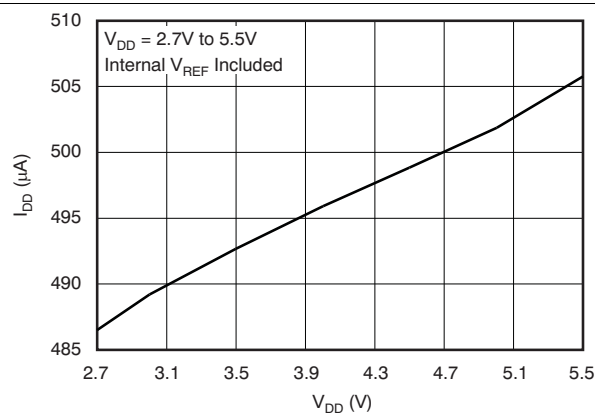


Figure 23. Power-Supply Current vs Power-Supply Voltage

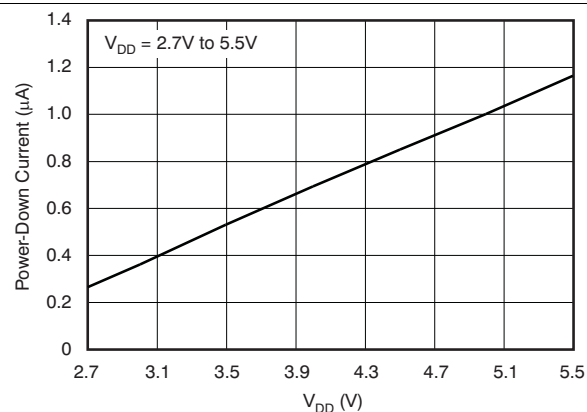


Figure 24. Power-Down Current vs Power-Supply Voltage

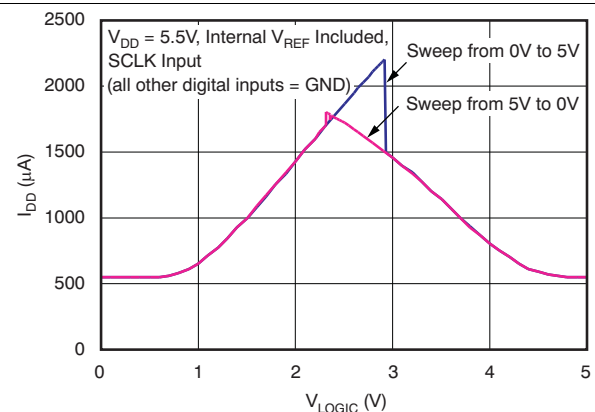


Figure 25. Power-Supply Current vs Logic Input Voltage

Typical Characteristics: DAC at $V_{DD} = 5\text{ V}$ (continued)

At $T_A = 25^\circ\text{C}$, external reference used, and DAC output not loaded, unless otherwise noted.

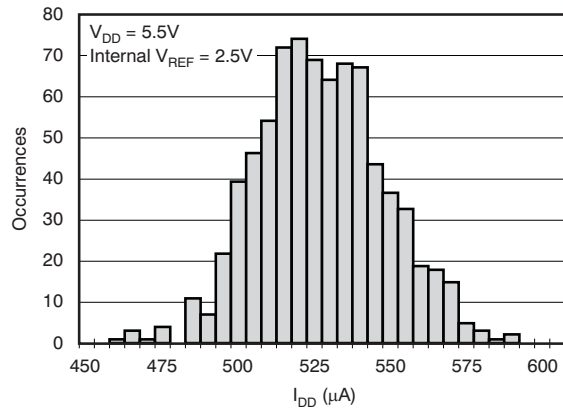


Figure 26. Power-Supply Current Histogram



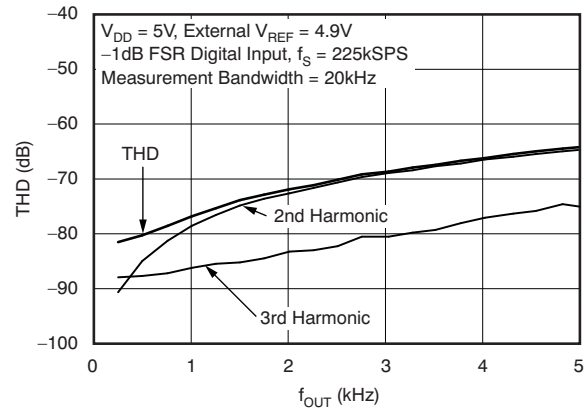


Figure 27. Total Harmonic Distortion vs Output Frequency

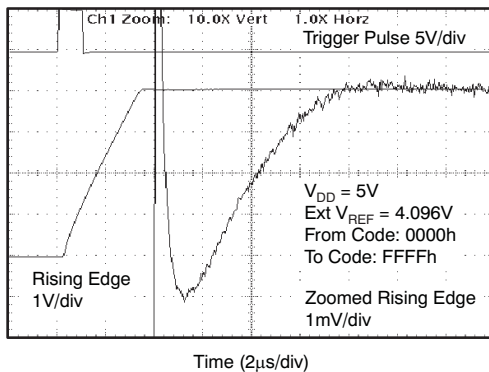


5-V Rising Edge

Figure 28. Full-Scale Settling Time

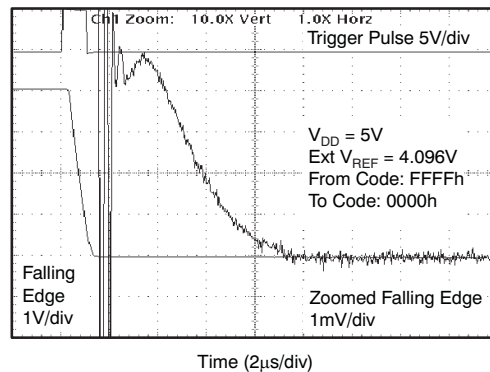


5-V Falling Edge

Figure 29. Full-Scale Settling Time

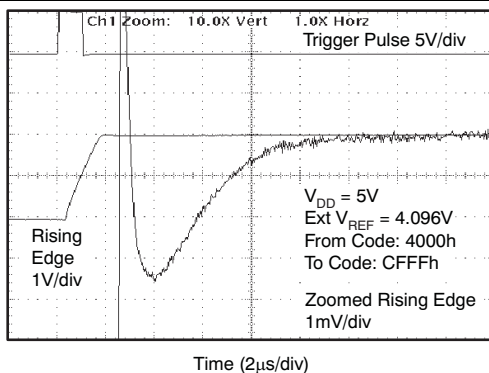

5-V Rising Edge

Figure 30. Half-Scale Settling Time

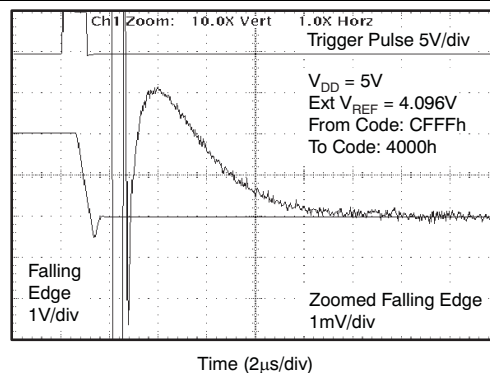

5-V Falling Edge

Figure 31. Half-Scale Settling Time

Typical Characteristics: DAC at $V_{DD} = 5\text{ V}$ (continued)

At $T_A = 25^\circ\text{C}$, external reference used, and DAC output not loaded, unless otherwise noted.

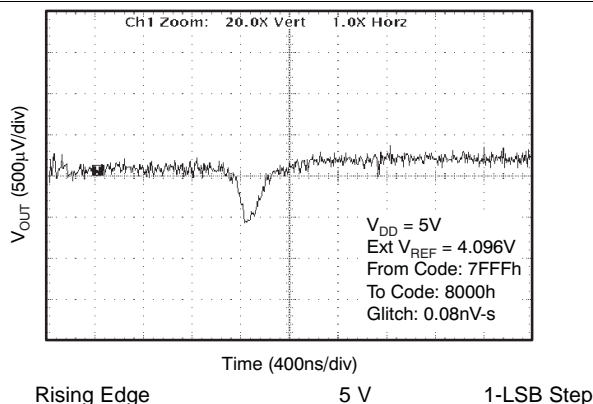


Figure 32. Glitch Energy

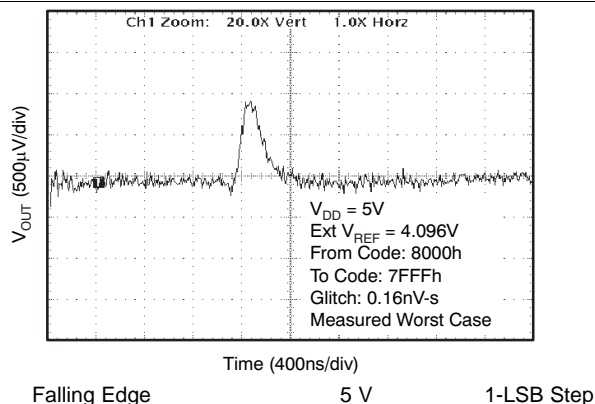


Figure 33. Glitch Energy

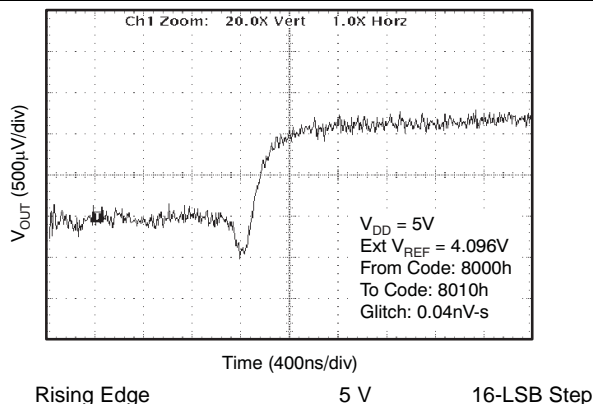


Figure 34. Glitch Energy

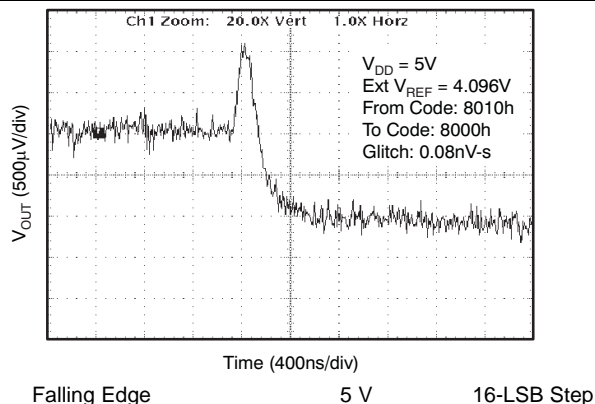


Figure 35. Glitch Energy

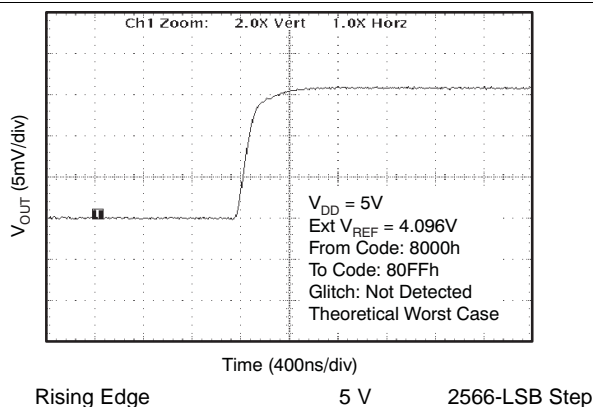


Figure 36. Glitch Energy

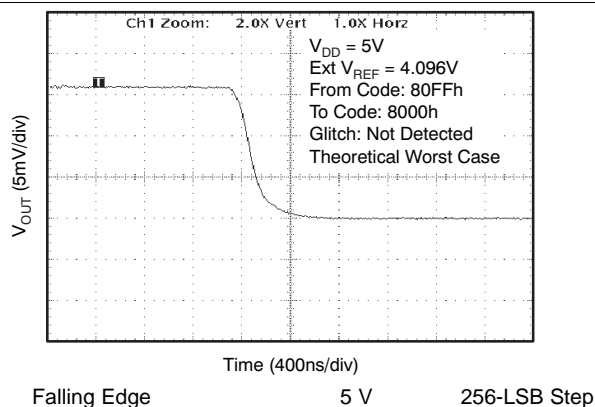


Figure 37. Glitch Energy

Typical Characteristics: DAC at $V_{DD} = 5\text{ V}$ (continued)

At $T_A = 25^\circ\text{C}$, external reference used, and DAC output not loaded, unless otherwise noted.

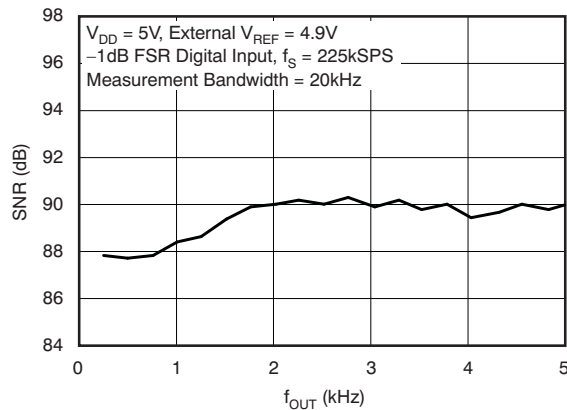


Figure 38. Signal-to-Noise Ratio vs Output Frequency



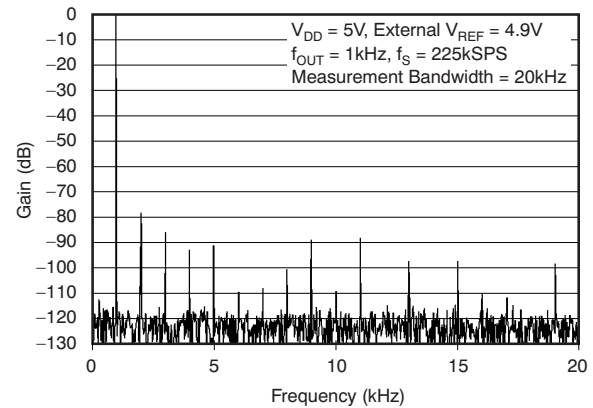


Figure 39. Power Spectral Density

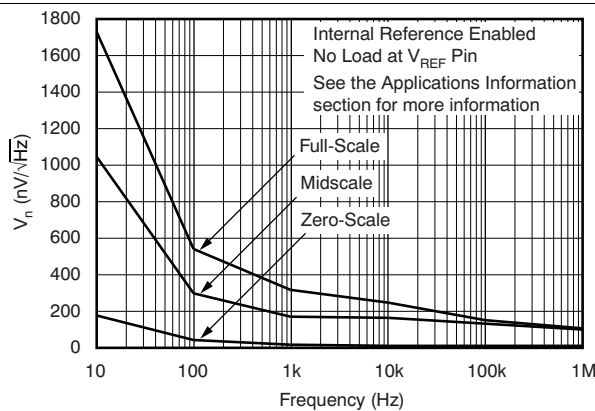


Explained in more detail in [Application and Implementation](#).

Figure 40. DAC Output Noise Density vs Frequency

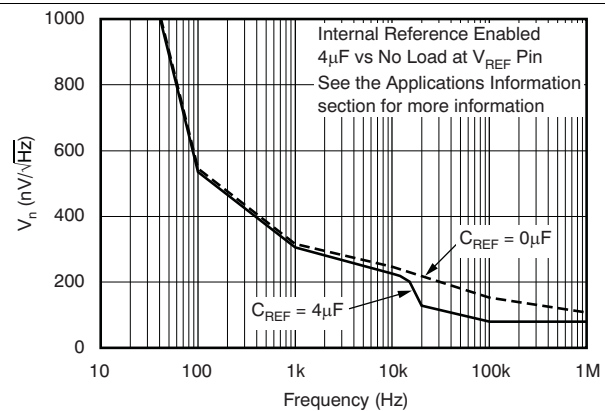

Explained in more detail in the [Application and Implementation](#)

Figure 41. DAC Output Noise Density vs Frequency

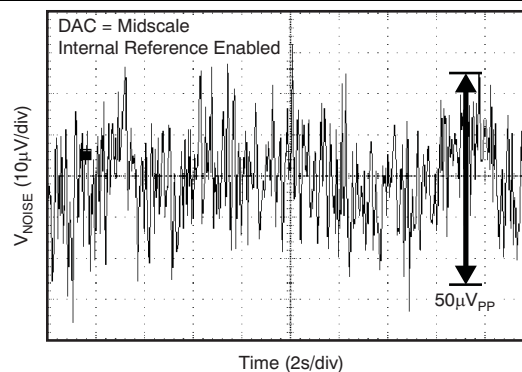

0.1 Hz to 10 Hz

Figure 42. DAC Output Noise

6.9 Typical Characteristics: DAC at $V_{DD} = 3.6\text{ V}$

At $T_A = 25^\circ\text{C}$, internal reference used, and DAC output not loaded, unless otherwise noted

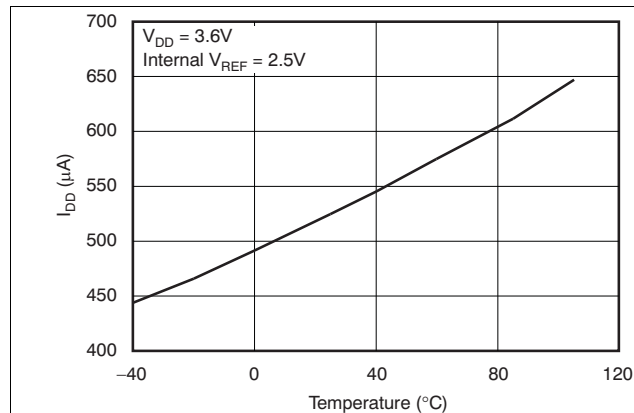


Figure 43. Power-Supply Current vs Temperature

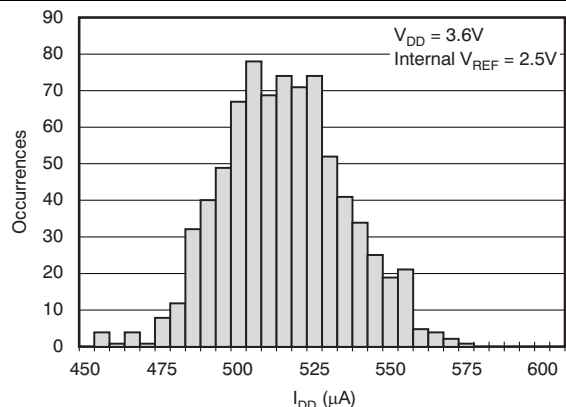


Figure 44. Power-Supply Current Histogram

6.10 Typical Characteristics: DAC at $V_{DD} = 2.7\text{ V}$

At $T_A = 25^\circ\text{C}$, internal reference used, and DAC output not loaded, unless otherwise noted

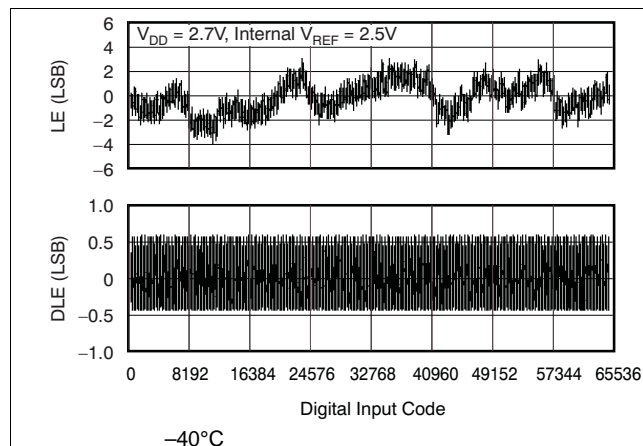


Figure 45. Linearity Error and Differential Linearity Error vs Digital Input Code

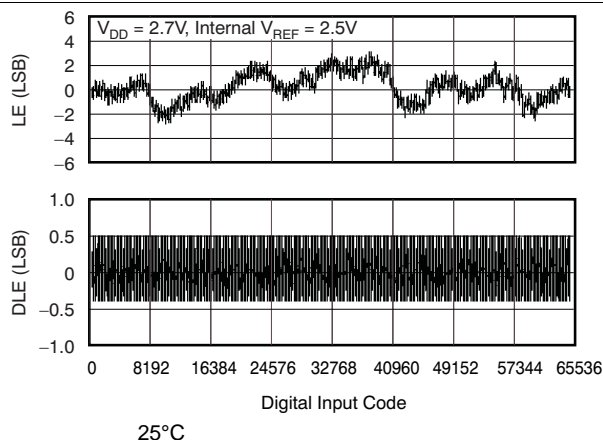


Figure 46. Linearity Error and Differential Linearity Error vs Digital Input Code

Typical Characteristics: DAC at $V_{DD} = 2.7\text{ V}$ (continued)

At $T_A = 25^\circ\text{C}$, internal reference used, and DAC output not loaded, unless otherwise noted

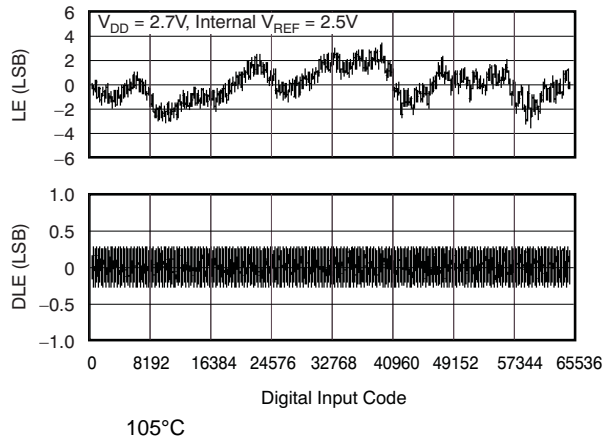


Figure 47. Linearity Error and Differential Linearity Error vs Digital Input Code

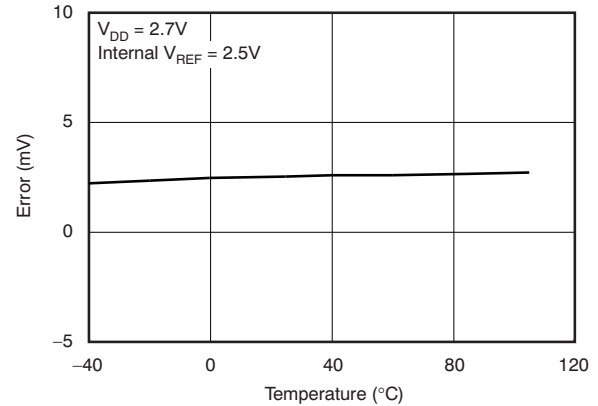


Figure 48. Zero-Scale Error vs Temperature

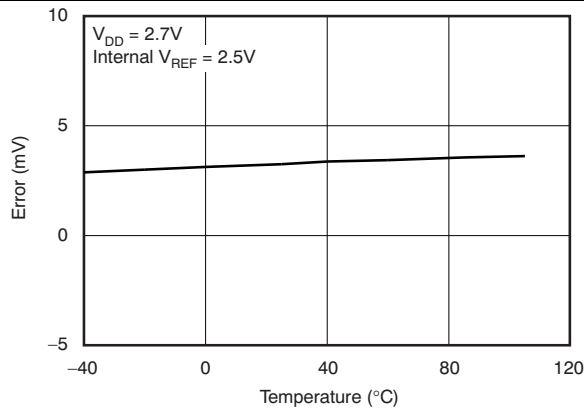


Figure 49. Full-Scale Error vs Temperature

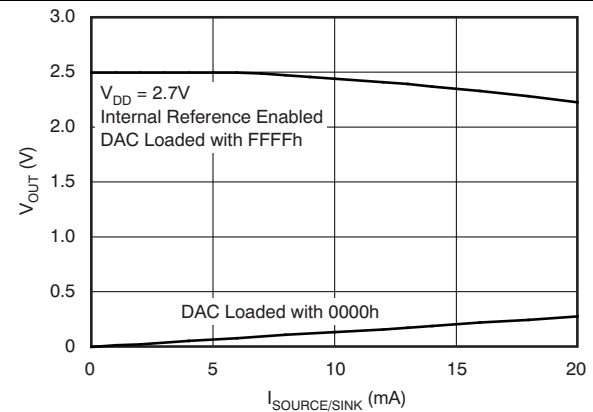


Figure 50. Source and Sink Current Capability

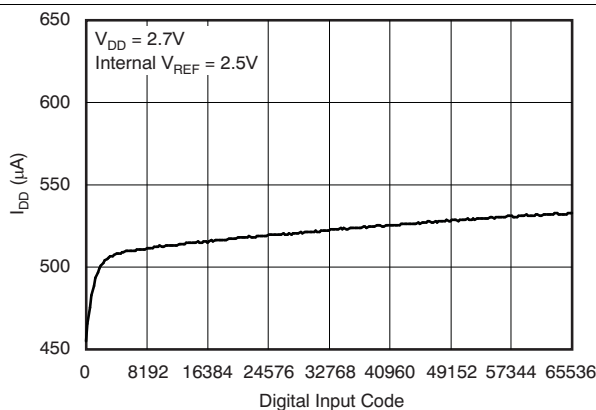


Figure 51. Supply Current vs Digital Input Code


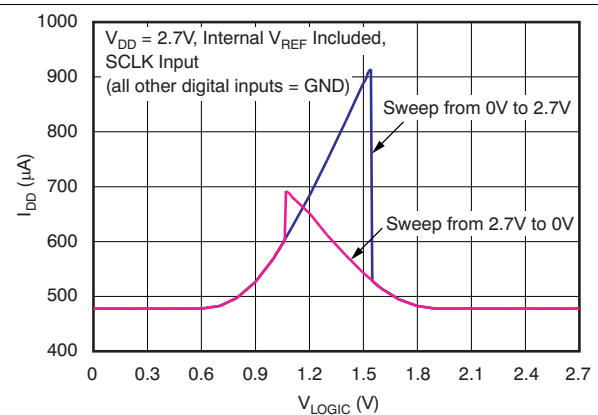


Figure 52. Power-Supply Current vs Logic Input Voltage


Typical Characteristics: DAC at $V_{DD} = 2.7\text{ V}$ (continued)

At $T_A = 25^\circ\text{C}$, internal reference used, and DAC output not loaded, unless otherwise noted

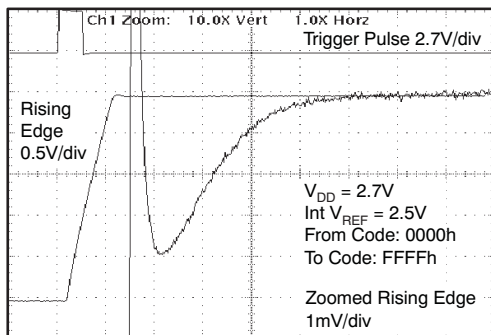


2.7-V Rising Edge

Figure 53. Full-Scale Settling Time

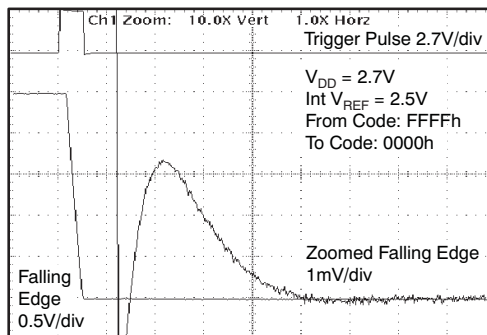


2.7-V Falling Edge

Figure 54. Full-Scale Settling Time: 2.7-V Falling Edge

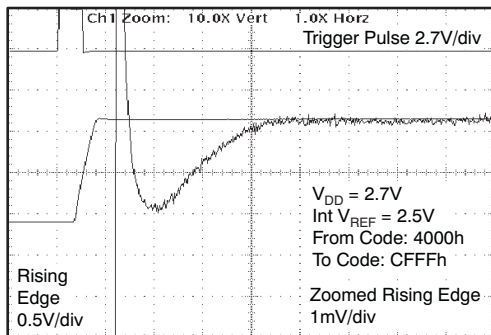

2.7-V Rising Edge

Figure 55. Half-Scale Settling Time

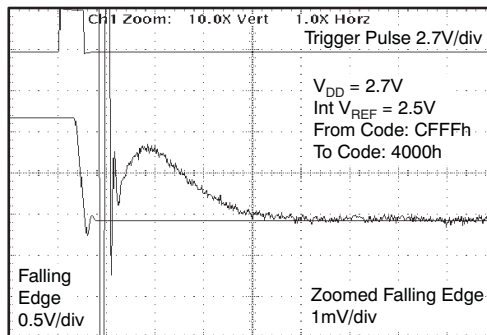

2.7-V Falling Edge

Figure 56. Half-Scale Settling Time

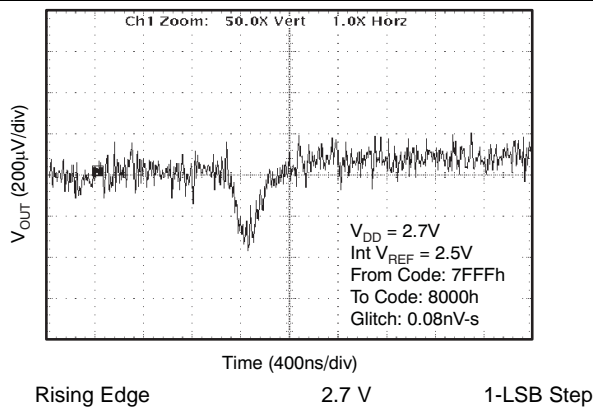


Figure 57. Glitch Energy

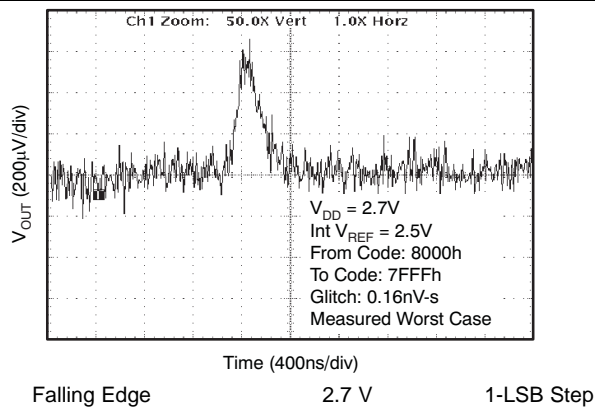


Figure 58. Glitch Energy

Typical Characteristics: DAC at $V_{DD} = 2.7\text{ V}$ (continued)

At $T_A = 25^\circ\text{C}$, internal reference used, and DAC output not loaded, unless otherwise noted

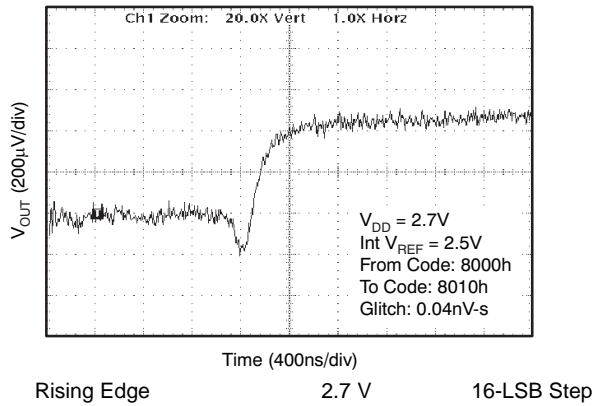


Figure 59. Glitch Energy

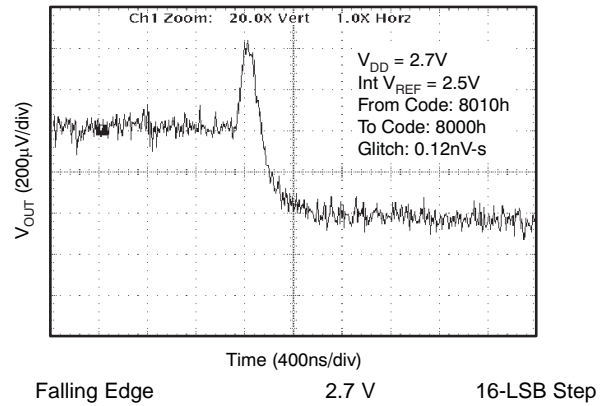


Figure 60. Glitch Energy

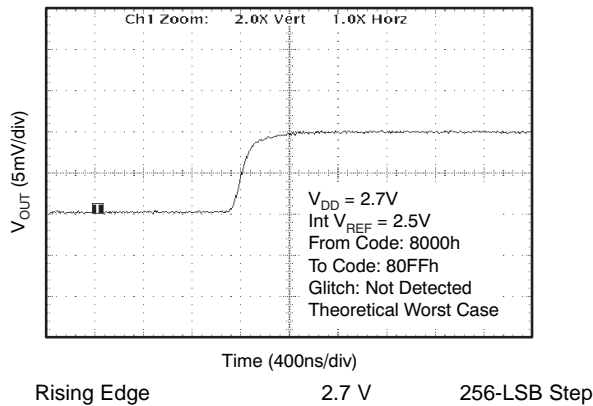


Figure 61. Glitch Energy

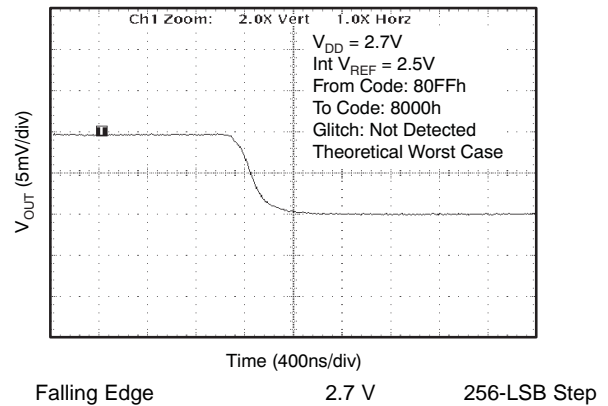



Figure 62. Glitch Energy

7 Detailed Description

7.1 Overview

The DAC8560 is a low-power, voltage output, 16-bit digital-to-analog converter (DAC). The DAC8560 includes a 2.5-V, 2-ppm/°C internal reference (enabled by default), giving a full-scale output voltage range of 2.5 V. The internal reference has an initial accuracy of 0.02% and can source up to 20 mA at the V_{REF} pin. The device is monotonic, provides very good linearity, and minimizes undesired code-to-code transient voltages (glitch). The DAC8560 uses a versatile 3-wire serial interface that operates at clock rates up to 30 MHz. It is compatible with standard SPI, QSPI, Microwire, and digital-signal-processor (DSP) interfaces.

7.2 Functional Block Diagram

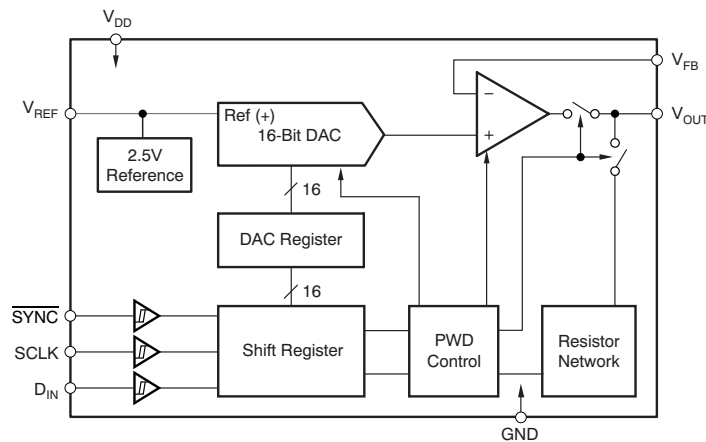

7.3 Feature Description

7.3.1 Digital-to-Analog Converter (DAC)

The DAC8560 architecture consists of a string DAC followed by an output buffer amplifier. Figure 63 shows a block diagram of the DAC architecture.

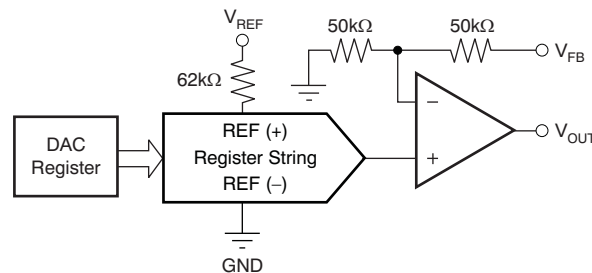


Figure 63. DAC8560 Architecture

The input coding to the DAC8560 is straight binary, so the ideal output voltage is given by:

$$V_{OUT} = \frac{D_{IN}}{65536} \times V_{REF}$$

where D_{IN} = decimal equivalent of the binary code that is loaded to the DAC register; it can range from 0 to 65535. (1)

Feature Description (continued)

7.3.2 Resistor String

The resistor string section is shown in Figure 64. It is simply a string of resistors, each of value R . The code loaded into the DAC register determines at which node on the string the voltage is tapped off to be fed into the output amplifier by closing one of the switches connecting the string to the amplifier. It is monotonic because it is a string of resistors.

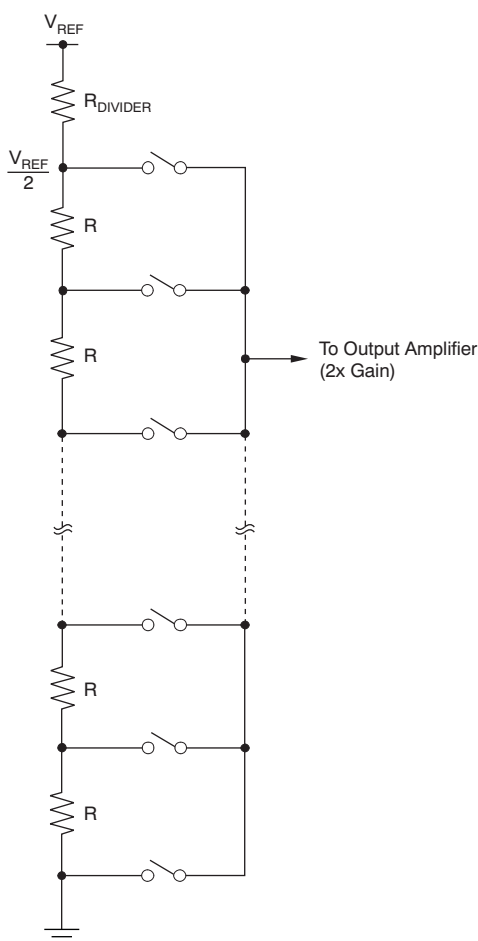


Figure 64. Resistor String

7.3.3 Output Amplifier

The output buffer amplifier is capable of generating rail-to-rail voltages on its output, giving an output range of 0 V to V_{DD} . It is capable of driving a load of 2 k Ω in parallel with 1000 pF to GND. The source and sink capabilities of the output amplifier can be seen in the *Typical Characteristics: DAC at $V_{DD} = 5$ V*. The slew rate is 1.8 V/ μ s with a full-scale settling time of 8 μ s with the output unloaded.

The inverting input of the output amplifier is available at the V_{FB} pin. This feature allows better accuracy in critical applications by tying the V_{FB} point and the amplifier output together directly at the load. Other signal conditioning circuitry may also be connected between these points for specific applications.

Feature Description (continued)

7.3.4 DAC Noise Performance

Typical noise performance for the DAC8560 with the internal reference enabled is shown in Figure 40 to Figure 42. Output noise spectral density at pin V_{OUT} versus frequency is depicted in Figure 40 for full-scale, midscale, and zero-scale input codes. The typical noise density for midscale code is 170 nV/ $\sqrt{\text{Hz}}$ at 1 kHz and 100 nV/ $\sqrt{\text{Hz}}$ at 1 MHz. High-frequency noise can be improved by filtering the reference noise as shown in Figure 41, where a 4- μF load capacitor is connected to the V_{REF} pin and compared to the no-load condition. Integrated output noise between 0.1 Hz and 10 Hz is close to 50 μV_{PP} (midscale), as shown in Figure 42.

7.3.5 Internal Reference

The DAC8560 includes a 2.5-V internal reference that is enabled by default. The internal reference is externally available at the V_{REF} pin. TI recommends a minimum 100-nF capacitor between the reference output and GND for noise filtering.

The internal reference of the DAC8560 is a bipolar transistor-based, precision bandgap voltage reference. The basic bandgap topology is shown in Figure 65. Transistors Q_1 and Q_2 are biased such that the current density of Q_1 is greater than that of Q_2 . The difference of the two base-emitter voltages ($V_{BE1} - V_{BE2}$) has a positive temperature coefficient and is forced across resistor R_1 . This voltage is gained up and added to the base-emitter voltage of Q_2 , which has a negative temperature coefficient. The resulting output voltage is virtually independent of temperature. The short-circuit current is limited by design to approximately 100 mA.

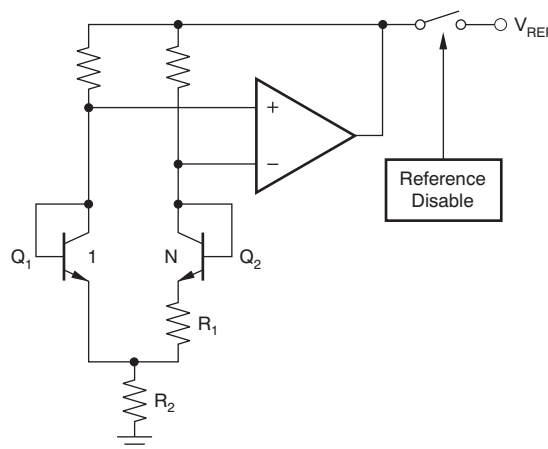


Figure 65. Simplified Schematic of the Bandgap Reference

7.3.5.1 Enable/Disable Internal Reference

The DAC8560 internal reference is enabled by default; however, the reference can be disabled for debugging or evaluation purposes. A serial command requiring at least two additional SCLK cycles at the end of the 24-bit write sequence (see [Serial Interface](#)) must be used to disable the internal reference. For proper operation, a total of at least 26 SCLK cycles are required for each enable/disable internal reference update sequence, during which $\overline{\text{SYNC}}$ must be held low. To disable the internal reference, execute the write sequence illustrated in Table 2 followed by at least two additional SCLK falling edges while $\overline{\text{SYNC}}$ is low.

To then enable the reference, either perform a power-cycle to reset the device, or sequentially execute the two write sequences in Table 3 and Table 4. Each of these write sequences must be followed by at least two additional SCLK falling edges while $\overline{\text{SYNC}}$ remains low.

During the time that the internal reference is disabled, the DAC will function normally using an external reference. At this point, the internal reference is disconnected from the V_{REF} pin (tri-state). Do not attempt to drive the V_{REF} pin externally and internally at the same time indefinitely.

Feature Description (continued)

7.3.5.2 Internal Reference Load

The DAC8560 internal reference does not require an external load capacitor for stability because it is stable with any capacitive load. However, for improved noise performance, TI recommends an external load capacitor of 150 nF or larger connected to the V_{REF} output. Figure 66 shows the typical connections required for operation of the DAC8560 internal reference. A supply bypass capacitor at the V_{DD} input is also recommended.

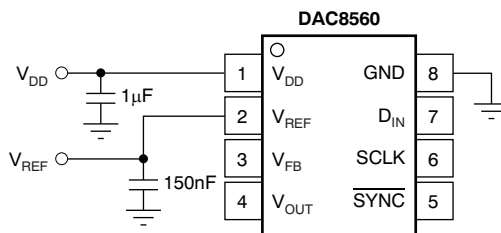


Figure 66. Typical Connections for Operating the DAC8560 Internal Reference

7.3.5.2.1 Supply Voltage

The DAC8560 internal reference features an extremely low dropout voltage. It can be operated with a supply of only 5mV above the reference output voltage in an unloaded condition. For loaded conditions, refer to the [Load Regulation](#) section. The stability of the DAC8560 internal reference with variations in supply voltage (line regulation, DC PSRR) is also exceptional. Within the specified supply voltage range of 2.7 V to 5.5 V, the variation at V_{REF} is smaller than 10 μ V/V; see the [Typical Characteristics: Internal Reference](#).

7.3.5.2.2 Temperature Drift

The DAC8560 internal reference is designed to exhibit minimal drift error, defined as the change in reference output voltage over varying temperature. The drift is calculated using the *box* method, which is described by Equation 2:

$$\text{Drift Error} = \left(\frac{V_{REF_MAX} - V_{REF_MIN}}{V_{REF} \times T_{RANGE}} \right) \times 10^6 \text{ (ppm/}^\circ\text{C)}$$

where

- V_{REF_MAX} = maximum reference voltage observed within temperature range T_{RANGE}
- V_{REF_MIN} = minimum reference voltage observed within temperature range T_{RANGE}
- $V_{REF} = 2.5 \text{ V}$, target value for reference output voltage

The DAC8560 internal reference (grades C and D) features an exceptional typical drift coefficient of 2 ppm/ $^\circ$ C from -40°C to $+120^\circ\text{C}$. Characterizing a large number of units, a maximum drift coefficient of 5 ppm/ $^\circ$ C (grades C and D) is observed. Temperature drift results are summarized in the [Typical Characteristics: Internal Reference](#).

7.3.5.2.3 Noise Performance

Typical 0.1-Hz to 10-Hz voltage noise can be seen in Figure 9. Additional filtering can be used to improve output noise levels, although care should be taken to ensure the output impedance does not degrade the AC performance. The output noise spectrum at V_{REF} without any external components is depicted in Figure 8, *Internal Reference Noise Density vs Frequency*. Another noise density spectrum is also shown in Figure 8, which was obtained using a 4 μ F load capacitor at V_{REF} for noise filtering. Internal reference noise impacts the DAC output noise; see the [DAC Noise Performance](#) section for more details.

Feature Description (continued)

7.3.5.2.4 Load Regulation

Load regulation is defined as the change in reference output voltage as a result of changes in load current. The load regulation of the DAC8560 internal reference is measured using force and sense contacts as pictured in [Figure 67](#). The force and sense lines reduce the impact of contact and trace resistance, resulting in accurate measurement of the load regulation contributed solely by the DAC8560 internal reference. Measurement results are summarized in the [Typical Characteristics: Internal Reference](#). Force and sense lines should be used for applications requiring improved load regulation.

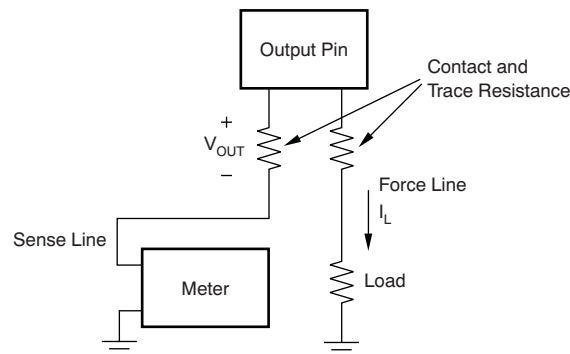


Figure 67. Accurate Load Regulation of the DAC8560 Internal Reference

7.3.5.2.5 Long-Term Stability

Long-term stability/aging refers to the change of the output voltage of a reference over a period of months or years. This effect lessens as time progresses, as shown in [Figure 7](#), the typical long-term stability curve. The typical drift value for the DAC8560 internal reference is 50 ppm from 0 hours to 1900 hours. This parameter is characterized by powering up and measuring 20 units at regular intervals for a period of 1900 hours.

7.3.5.2.6 Thermal Hysteresis

Thermal hysteresis for a reference is defined as the change in output voltage after operating the device at 25°C, cycling the device through the specified temperature range, and returning to 25°C. It is expressed in [Equation 3](#):

$$V_{\text{HYST}} = \left(\frac{|V_{\text{REF_PRE}} - V_{\text{REF_POST}}|}{V_{\text{REF_NOM}}} \right) \times 10^6 \text{ (ppm)}$$

where

- V_{HYST} = thermal hysteresis
- $V_{\text{REF_PRE}}$ = output voltage measured at 25°C pre-temperature cycling
- $V_{\text{REF_POST}}$ = output voltage measured after the device has been cycled through the temperature range of –40°C to +120°C, and returned to 25°C

(3)

7.4 Device Functional Modes

7.4.1 Power-Down Modes

The DAC8560 supports four separate modes of operation. These modes are programmable by setting two bits (PD1 and PD0) in the control register. Table 1 shows how to control the operating mode with data bits PD1 (DB17) and PD0 (DB16).

Table 1. Operating Modes

| PD1 (DB17) | PD0 (DB16) | OPERATING MODE |
|------------|------------|--------------------------|
| 0 | 0 | Normal operation |
| 0 | 1 | Power-down 1 kΩ to GND |
| 1 | 0 | Power-down 100 kΩ to GND |
| 1 | 1 | Power-down High-Z |

When both bits are set to 0, the device works normally with its typical current consumption of 530 μA at 5.5 V. However, for the three power-down modes, the supply current falls to 1.2 μA at 5.5 V (0.7 μA at 3.6 V). Not only does the supply current fall, but the output stage is also internally switched from the output of the amplifier to a resistor network of known values.

The advantage of this switching is that the output impedance of the device is known while it is in power-down mode. As shown in Table 1, there are three different power-down options. V_{OUT} can be connected internally to GND through a 1-k Ω resistor, a 100-k Ω resistor, or open-circuited (High-Z). The output stage is shown in Figure 68.

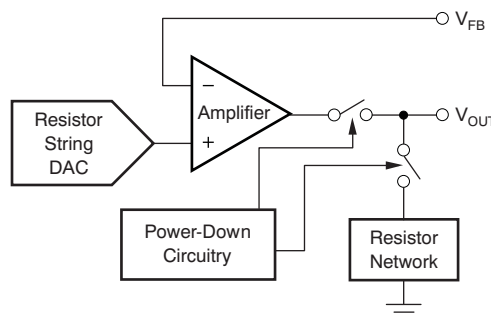


Figure 68. Output Stage During Power Down

All analog circuitry is shut down when the power-down mode is activated. However, the contents of the DAC register are unaffected when in power down. The time to exit power down is typically 2.5 μs for $V_{\text{DD}} = 5\text{ V}$, and 5 μs for $V_{\text{DD}} = 3\text{ V}$. See the [Typical Characteristics: DAC at \$V_{\text{DD}} = 5\text{ V}\$](#) for more information.

7.5 Programming

7.5.1 Serial Interface

The DAC8560 has a 3-wire serial interface ($\overline{\text{SYNC}}$, SCLK, and D_{IN}) that is compatible with SPI, QSPI, and Microwire interface standards, as well as most DSPs. See [Figure 1](#) for an example of a typical write sequence.

The write sequence begins by bringing the $\overline{\text{SYNC}}$ line LOW. Data from the D_{IN} line is clocked into the 24-bit shift register on each falling edge of SCLK. The serial clock frequency can be as high as 30 MHz, making the DAC8560 compatible with high-speed DSPs. On the 24th falling edge of the serial clock, the last data bit is clocked in and the programmed function is executed.

At this point, the $\overline{\text{SYNC}}$ line may be kept LOW or brought HIGH. In either case, it must be brought HIGH for a minimum of 33 ns before the next write sequence so that a falling edge of $\overline{\text{SYNC}}$ can initiate the next write sequence. As previously mentioned, it must be brought HIGH again before the next write sequence.

7.5.2 Input Shift Register

The input shift register is 24 bits wide, as shown in [Table 5](#). The first six bits must be 000000. The next two bits (PD1 and PD0) are control bits that set the desired mode of operation (normal mode or any one of three power-down modes) as indicated in [Table 1](#).

A more complete description of the various modes is located in [Power-Down Modes](#). The next 16 bits are the data bits, which are transferred to the DAC register on the 24th falling edge of SCLK under normal operation (see [Table 1](#)).

7.5.3 $\overline{\text{SYNC}}$ Interrupt

In a normal write sequence, the $\overline{\text{SYNC}}$ line is kept LOW for at least 24 falling edges of SCLK and the DAC is updated on the 24th falling edge. However, if $\overline{\text{SYNC}}$ is brought HIGH before the 24th falling edge, it acts as an interrupt to the write sequence. The shift register is reset, and the write sequence is seen as invalid. Neither an update of the DAC register contents, nor a change in the operating mode occurs, as shown in [Figure 69](#).

7.5.4 Power-On Reset

The DAC8560 contains a power-on-reset circuit that controls the output voltage during power up. On power up, all registers are filled with zeros and the output voltage is zero-scale; it remains there until a valid write sequence is made to the DAC. This feature is useful in applications where it is important to know the state of the output of the DAC while it is in the process of powering up.

7.6 Register Maps

7.6.1 Write Sequence for Disabling the DAC8560 Internal Reference

Table 2. Write Sequence for Disabling the DAC8560 Internal Reference

| DB23 | | | | | | | | | | | | | | | | | | | | | | | DB0 |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----|
| 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

7.6.2 Enabling the DAC8560 Internal Reference (Write Sequence 1 of 2)

Table 3. Enabling the DAC8560 Internal Reference (Write Sequence 1 of 2)

| DB23 | | | | | | | | | | | | | | | | | | | | | | | DB0 |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----|
| 0 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

7.6.3 Enabling the DAC8560 Internal Reference (Write Sequence 2 of 2)

Table 4. Enabling the DAC8560 Internal Reference (Write Sequence 2 of 2)

| DB23 | | | | | | | | | | | | | | | | | | | | | | | DB0 |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----|
| 0 | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

7.6.4 DAC8560 Data Input Register Format

Table 5. DAC8560 Data Input Register Format

| DB23 | | | | | | | | | | | | | | | | | | | | | | | DB0 |
|------|---|---|---|---|---|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|-----|
| 0 | 0 | 0 | 0 | 0 | 0 | PD1 | PD0 | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

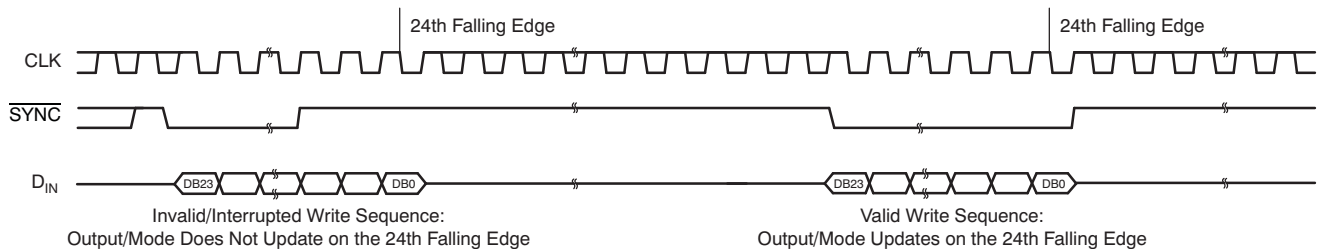


Figure 69. SYNC Interrupt Facility

8 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The low-power consumption of the DAC8560, coupled with the ultra-low current power-down modes, makes the device a great choice for battery-operated and portable applications such as oscilloscopes and similar test and measurement equipment. In addition to the low-power requirement, these applications often require a bipolar output range for offset and gain calibration as described in the following sections.

8.2 Typical Applications

The output voltage with [Figure 70](#) and [Figure 71](#) for any input code can be calculated using [Equation 4](#):


$$V_O = \left[V_{REF} \times \left(\frac{D}{65536} \right) \times \left(\frac{R_1 + R_2}{R_1} \right) - V_{REF} \times \left(\frac{R_2}{R_1} \right) \right] \quad (4)$$

where D represents the input code in decimal (0–65535).

With $V_{REF} = 5\text{ V}$, $R_1 = R_2 = 10\text{ k}\Omega$.

$$V_O = \left(\frac{10 \times D}{65536} \right) - 5\text{ V} \quad (5)$$


This result has an output voltage range of $\pm 5\text{ V}$ with 0000h corresponding to a -5 V output and FFFFh corresponding to a 5 V output, as shown in [Figure 70](#). Similarly, using the internal reference, a $\pm 2.5\text{ V}$ output voltage range can be achieved, as shown in [Figure 71](#).

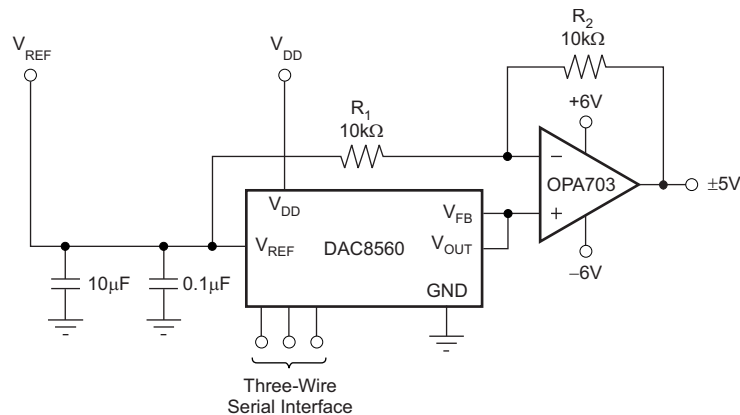

Copyright © 2018, Texas Instruments Incorporated


Figure 70. Bipolar Output Range Using External Reference at 5 V

Typical Applications (continued)

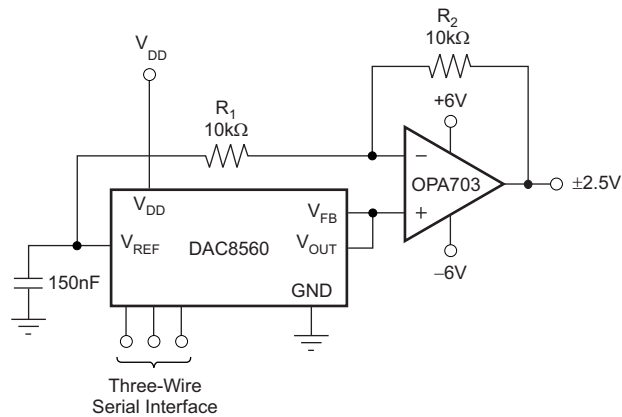

Copyright © 2018, Texas Instruments Incorporated

Figure 71. Bipolar Output Range Using Internal Reference

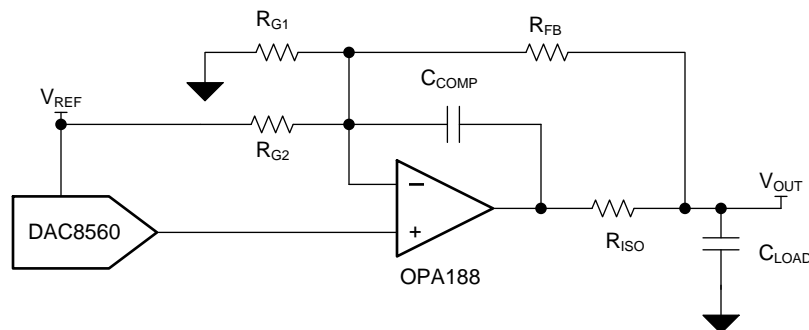

Copyright © 2018, Texas Instruments Incorporated

Figure 72. Bipolar Output Range > $\pm V_{REF}$

8.2.1 Design Requirements

The design requirements and performance goals are summarized as follows:

- DAC Supply Voltage: +5-V DC
- Amplifier Supply Voltage: ± 15 -V DC
- Input: 3-wire, 24-bit SPI
- Output: ± 10 -V DC
- Capacitance Load: 20 nF

Table 6. Comparison of Design Goal, Simulation, and Measured Performance

| | GOAL | SIMULATED | MEASURED |
|-------------------------------|------|-----------|----------|
| Total unadjusted error (%FSR) | 0.25 | 0.23 | 0.0939 |

8.2.2 Detailed Design Procedure or Bipolar Operation > $\pm V_{REF}$

8.2.2.1 Bipolar Operation Greater Than $\pm V_{REF}$

The DAC8560 has been designed for single-supply operation; a bipolar output range is also possible using the circuit in [Figure 71](#). This unipolar-to-bipolar signal conditioning circuit uses an operational amplifier (op amp) with negative feedback and three resistors in a modified summing amplifier configuration to generate high-voltage bipolar outputs. The DC transfer function is based on the ratio of the feedback resistor R_{FB} and gain setting resistors R_{G1} and R_{G2} . This design takes consideration for generating voltage outputs and for driving reactive loads such as long cables common in industrial process control applications. The circuit shown in [Figure 72](#) gives an output voltage range greater than $\pm V_{REF}$.

The DC transfer function for this design is defined as:

$$V_{OUT} = \left(1 + \frac{R_{FB}}{R_{G2}} + \frac{R_{FB}}{R_{G1}}\right) V_{DAC} - \frac{R_{FB}}{R_{G2}} V_{REF} \quad (6)$$

8.2.2.1.1 Passive Component Selection

The amplifier in this circuit uses negative feedback to ensure that the voltages at the inverting and non-inverting terminals are equal. When the DAC output is at zero scale (0 V) the inverting terminal is a virtual ground so no current flows across R_{G1} ; this causes the circuit to function as an inverting amplifier with gain equal to R_{FB} / R_{G2} . When the DAC output is full-scale (V_{REF}) the inverting terminal potential is equal to V_{REF} so no current flows across R_{G2} ; this causes the circuit to function as a non-inverting amplifier with gain equal to $(1 + R_{FB} / R_{G1})$. A simple three-step process can be used to select the resistor values used to realize any bipolar output range using DAC8560. The internal V_{REF} value is 2.5 V. The desired output range for this design is ± 10 V. First, using the transfer function shown in [Equation 6](#), consider the negative full-scale output case when V_{DAC} is equal to 0 V, V_{REF} is equal to 2.5 V, and V_{OUT} is equal to -10 V. This case is used to calculate the ratio of R_{FB} to R_{G2} and is shown explicitly in [Equation 7](#).

$$\begin{aligned} -10 \text{ V} &= \left(1 + \frac{R_{FB}}{R_{G2}} + \frac{R_{FB}}{R_{G1}}\right) (0) - \frac{R_{FB}}{R_{G2}} (2.5 \text{ V}) \\ -10 \text{ V} &= -\frac{R_{FB}}{R_{G2}} (2.5 \text{ V}) \\ R_{FB} &= 4 \times R_{G2} \end{aligned} \quad (7)$$

Second, consider the positive full-scale output case when V_{DAC} is equal to 2.5 V, V_{REF} is equal to 2.5 V, and V_{OUT} is equal to 10 V. This case is used to calculate the ratio of R_{FB} to R_{G1} and is shown explicitly in [Equation 8](#).

$$\begin{aligned} 10 \text{ V} &= \left(1 + \frac{R_{FB}}{R_{G2}} + \frac{R_{FB}}{R_{G1}}\right) (2.5) - \frac{R_{FB}}{R_{G2}} (2.5 \text{ V}) \\ 10 \text{ V} &= \left(1 + \frac{R_{FB}}{R_{G1}}\right) (2.5 \text{ V}) \\ R_{G1} &= \frac{R_{FB}}{3} \end{aligned} \quad (8)$$

Finally, seed the ideal value of R_{G2} to calculate the ideal values of R_{FB} and R_{G1} . The key considerations for seeding the value of R_{G2} should be the drive strength of the reference source as well as choosing small resistor values to minimize noise contributed by the resistor network. For this design R_{G2} of 8.25 k Ω was chosen, which limits the peak current drawn from the reference source to approximately 333 μ A under nominal conditions, well within the 20-mA limit of the DAC8560. In this case the nearest, 0.1% tolerance, 0603 package values for each resistor are ideal.

Standard values for 0.1% resistors can be an obstacle for this design and it may take multiple iterations of seeding the values to find real components or they may not exist. Workarounds can include utilizing multiple resistors in series and/or parallel, using potentiometers for analog trim calibration, or providing extra gain in the output circuit and applying digital calibration. In systems where the output voltage must reach the design-goal end-points (± 10 V) it may be desirable to apply additional gain to the circuit. This approach may contribute additional overall system error since the end-point errors vary from system to system. For this design, use the exact values calculated in the design process to keep error analysis easy to follow.

To deliver a near-universal cable drive solution, choose C_{LOAD} to be relatively large compared to typical cable capacitance such that its capacitance dominates the reactive load seen by the output amplifier. To drive larger capacitive loads R_{ISO} , C_{COMP} , and C_{LOAD} may need to be adjusted. An R_{ISO} of 70 Ω and C_{COMP} of 150 pF are used for this design.

Resistor matching for the op amp resistor network is critical for the success of this design; choose components with tight tolerances. For this design 0.1% resistor values are implemented but this constraint may be adjusted based on application specific design goals. Resistor matching contributes to both offset error and gain error in this design. The tolerance of stability components R_{ISO} and C_{COMP} is not critical and 1% components are acceptable.

Table 7. Values of Resistor Network

| RESISTOR | VALUE |
|----------|-----------------|
| R_{G1} | 11 k Ω |
| R_{G2} | 8.25 k Ω |
| R_{FB} | 33 k Ω |


8.2.2.1.2 Amplifier Selection

Amplifier input offset voltage (V_{OS}) is a key consideration for this design. V_{OS} of an op amp is a typical data-sheet specification but in-circuit performance is also impacted by drift over temperature, the common-mode rejection ratio (CMRR), and power supply rejection ratio (PSRR). Thus, consider these parameters as well. For AC operation also consider slew rate and settling time. Input-bias current (IB) can also be a factor, but typically the resistor network is implemented with sufficiently small resistor values that the effects of input-bias current are negligible.

8.2.2.2 Microprocessor Interfacing

8.2.2.2.1 DAC8560 to 8051 Interface

See [Figure 73](#) for a serial interface between the DAC8560 and a typical 8051-type microcontroller. The setup for the interface is as follows: TXD of the 8051 drives SCLK of the DAC8560, while RXD drives the serial data line of the device. The \overline{SYNC} signal is derived from a bit-programmable pin on the port of the 8051. In this case, port line P3.3 is used. When data is to be transmitted to the DAC8560, P3.3 is taken LOW. The 8051 transmits data in 8-bit bytes; thus, only eight falling clock edges occur in the transmit cycle. To load data to the DAC, P3.3 is left LOW after the first eight bits are transmitted, then a second write cycle is initiated to transmit the second byte of data. P3.3 is taken HIGH following the completion of the third write cycle. The 8051 outputs the serial data in a format which has the LSB first. The DAC8560 requires its data with the MSB as the first bit received. The 8051 transmit routine must therefore take this into account, and *mirror* the data as needed.

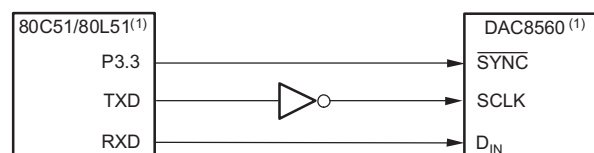


NOTE: (1) Additional pins omitted for clarity.

Figure 73. DAC8560 to 80C51/80L51 Interface

8.2.2.2.2 DAC8560 to Microwire Interface

[Figure 74](#) shows an interface between the DAC8560 and any Microwire compatible device. Serial data is shifted out on the falling edge of the serial clock and is clocked into the DAC8560 on the rising edge of the SK signal.

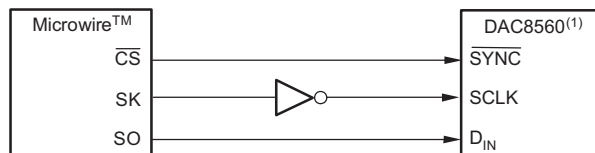


NOTE: (1) Additional pins omitted for clarity.

Figure 74. DAC8560 to Microwire Interface

8.2.2.2.3 DAC8560 to 68HC11 Interface

Figure 75 shows a serial interface between the DAC8560 and the 68HC11 microcontroller. SCK of the 68HC11 drives the SCLK of the DAC8560, while the MOSI output drives the serial data line of the DAC. The SYNC signal is derived from a port line (PC7), similar to the 8051 diagram.


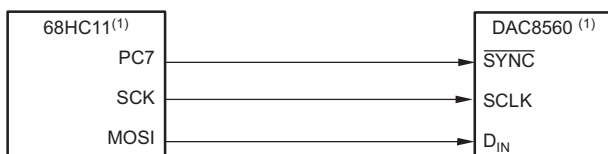


NOTE: (1) Additional pins omitted for clarity.

Figure 75. DAC8560 to 68HC11 Interface

Configure the 68HC11 so that its CPOL bit is 0, and its CPHA bit is 1. This configuration causes data appearing on the MOSI output to be valid on the falling edge of SCK. When data is being transmitted to the DAC, the SYNC line is held LOW (PC7). Serial data from the 68HC11 is transmitted in 8-bit bytes with only eight falling clock edges occurring in the transmit cycle. (Data is transmitted MSB first.) In order to load data to the DAC8560, PC7 is left LOW after the first eight bits are transferred, then a second and third serial write operation is performed to the DAC. PC7 is taken HIGH at the end of this procedure.

8.2.3 Application Curves

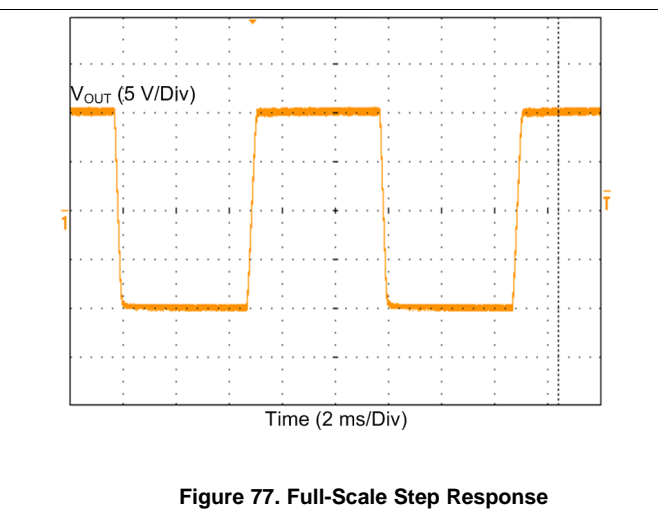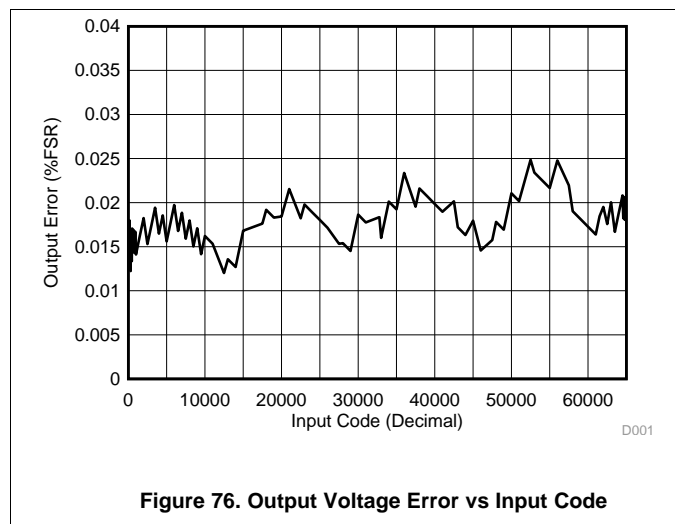

9 Power Supply Recommendations

The DAC8560 can operate within the specified supply voltage range of 2.7 V to 5.5 V. The power applied to VDD must be well-regulated and low-noise. Switching power supplies and DC-DC converters often have high-frequency glitches or spikes riding on the output voltage. In addition, digital components can create similar high-frequency spikes. This noise can easily couple into the DAC output voltage through various paths between the power connections and analog output. In order to further minimize noise from the power supply, TI strongly recommends a 1- μ F to 10- μ F capacitor and 0.1- μ F bypass capacitor. The current consumption on the VDD pin, the short-circuit current limit, and the load current for the device is listed in [Electrical Characteristics](#). The power supply must meet the aforementioned current requirements.

10 Layout

10.1 Layout Guidelines

A precision analog component requires careful layout, adequate bypassing, and clean, well-regulated power supplies.

The DAC8560 offers single-supply operation, and it often is used in close proximity with digital logic, microcontrollers, microprocessors, and digital signal processors. The more digital logic present in the design and the higher the switching speed, the more difficult it is to keep digital noise from appearing at the output.

As a result of the single ground pin of the DAC8560, all return currents, including digital and analog return currents for the DAC, must flow through a single point. Ideally, connect GND directly to an analog ground plane. This plane would be separate from the ground connection for the digital components until they were connected at the power-entry point of the system.

The power applied to VDD must be well regulated and low noise. Switching power supplies and DC-DC converters often have high-frequency glitches or spikes riding on the output voltage. In addition, digital components can create similar high-frequency spikes as their internal logic switches states. This noise can easily couple into the DAC output voltage through various paths between the power connections and analog output.

As with the GND connection, connect VDD to a power-supply plane or trace that is separate from the connection for digital logic until they are connected at the power-entry point. In addition, a 1- μ F to 10- μ F capacitor and 0.1- μ F bypass capacitor are strongly recommended. In some situations, additional bypassing may be required, such as a 100- μ F electrolytic capacitor or even a *Pi* filter made up of inductors and capacitors – all designed to essentially low-pass filter the supply, removing the high-frequency noise.

10.2 Layout Example

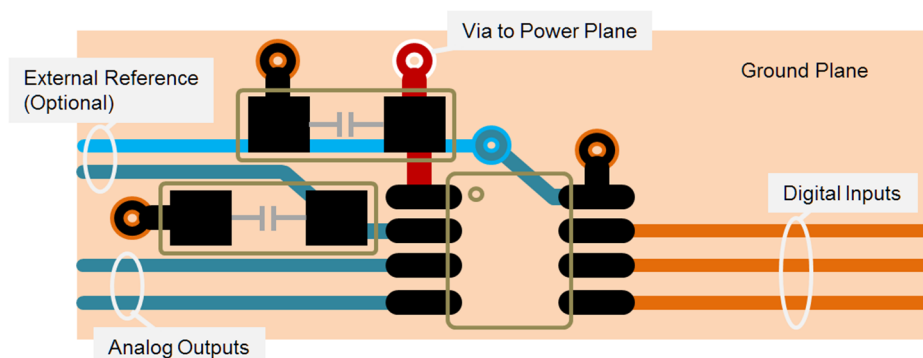


Figure 78. DAC8560 Layout Example

11 器件和文档支持

11.1 文档支持

11.1.1 相关文档

[CMOS, 轨至轨, I/O 运算放大器](#)

11.2 接收文档更新通知

要接收文档更新通知, 请导航至 [TI.com.cn](#) 上的器件产品文件夹。单击右上角的 [通知我](#) 进行注册, 即可每周接收产品信息更改摘要。有关更改的详细信息, 请查阅已修订文档中包含的修订历史记录。

11.3 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范, 并且不一定反映 TI 的观点; 请参阅 TI 的 [《使用条款》](#)。

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](#), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.4 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

11.5 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时, 应将导线一起截短或将装置放置于导电泡棉中, 以防止 MOS 门极遭受静电损伤。

11.6 术语表

[SLYZ022](#) — *TI 术语表*。

这份术语表列出并解释术语、缩写和定义。

12 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更, 恕不另行通知, 且不会对此文档进行修订。如需获取此产品说明书的浏览器版本, 请查阅左侧的导航栏。

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2019 德州仪器半导体技术（上海）有限公司

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| DAC8560IADGKR | ACTIVE | VSSOP | DGK | 8 | 2500 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IADGKRG4 | ACTIVE | VSSOP | DGK | 8 | 2500 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IADGKT | ACTIVE | VSSOP | DGK | 8 | 250 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IBDGKR | ACTIVE | VSSOP | DGK | 8 | 2500 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IBDGKT | ACTIVE | VSSOP | DGK | 8 | 250 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IBDGKTG4 | ACTIVE | VSSOP | DGK | 8 | 250 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560ICDGKR | ACTIVE | VSSOP | DGK | 8 | 2500 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560ICDGKT | ACTIVE | VSSOP | DGK | 8 | 250 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560ICDGKTG4 | ACTIVE | VSSOP | DGK | 8 | 250 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IDDGKR | ACTIVE | VSSOP | DGK | 8 | 2500 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IDDGKT | ACTIVE | VSSOP | DGK | 8 | 250 | RoHS & Green | NIPDAU NIPDAUAG | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |
| DAC8560IDDGKTG4 | ACTIVE | VSSOP | DGK | 8 | 250 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | D860 | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- ⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- ⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- ⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- ⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DAC8560IADGKR | VSSOP | DGK | 8 | 2500 | 330.0 | 12.4 | 5.3 | 3.4 | 1.4 | 8.0 | 12.0 | Q1 |
| DAC8560IADGKT | VSSOP | DGK | 8 | 250 | 180.0 | 12.4 | 5.3 | 3.4 | 1.4 | 8.0 | 12.0 | Q1 |
| DAC8560IBDGKR | VSSOP | DGK | 8 | 2500 | 330.0 | 12.4 | 5.3 | 3.4 | 1.4 | 8.0 | 12.0 | Q1 |
| DAC8560IBDGKT | VSSOP | DGK | 8 | 250 | 180.0 | 12.4 | 5.3 | 3.4 | 1.4 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DAC8560IADGKR | VSSOP | DGK | 8 | 2500 | 350.0 | 350.0 | 43.0 |
| DAC8560IADGKT | VSSOP | DGK | 8 | 250 | 210.0 | 185.0 | 35.0 |
| DAC8560IBDGKR | VSSOP | DGK | 8 | 2500 | 350.0 | 350.0 | 43.0 |
| DAC8560IBDGKT | VSSOP | DGK | 8 | 250 | 210.0 | 185.0 | 35.0 |

DGK (S-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
 - E. Falls within JEDEC MO-187 variation AA, except interlead flash.

DGK (S-PDSO-G8)

PLASTIC SMALL OUTLINE PACKAGE



- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-7351 is recommended for alternate designs.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
 - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

重要声明和免责声明

TI 提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款 (<https://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 或 [ti.com.cn](https://www.ti.com.cn) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2021 德州仪器半导体技术（上海）有限公司