



ADS5401 单通道 12 位 800Mps 模数转换器

1 特性

- 单通道
- 12 位分辨率
- 最大时钟速率：800Mps
- 低摆幅满量程输入：1.0Vpp
- 支持高阻抗输入的模拟输入缓冲器
- 输入带宽 (3dB)：>1.2GHz
- 数据输出接口：双倍数据速率 (DDR) 低压差分信号 (LVDS)
- 可选 2x 抽取（低通滤波器或高通滤波器）
- 196 引脚 BGA 封装 (12mm × 12mm)

2 应用

- 测试和测量仪器
- 超宽波段软件定义无线电
- 数据采集
- 功率放大器线性化
- 信号智能和干扰
- 雷达和卫星系统
- 微波接收器
- 线缆基础设施
- 非破坏性测试
- 功率耗散：每通道 1.33W
- $f_{in} = 230\text{MHz}$ IF 时的频谱性能
 - 信噪比 (SNR)：61.3dBFS
 - 无杂散动态范围 (SFDR)：74dBc
- $f_{in} = 700\text{MHz}$ IF 时的频谱性能
 - SNR：59.8dBFS
 - SFDR：69dBc

3 说明


ADS5401 器件是一款高线性、单通道 12 位、800Mps 模数转换器 (ADC)，能够简化高带宽接收器的前端滤波器设计。模拟输入缓冲器使片载跟踪保持的内部切换不会干扰信号源并提供一个高阻抗输入。可选择对输出数据进行 2 被抽取。此 ADC 设计用于高 SFDR，且在宽输入频率范围内具有低噪声性能以及出色的无杂散动态范围。此器件采用 196 引脚 BGA 封装并且指定在整个工业温度范围内（-40°C 至 85°C）。

器件信息⁽¹⁾

器件型号	封装	封装尺寸（标称值）
ADS5401	NFBGA (196)	12.00mm x 12.00mm

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

简化电路原理图

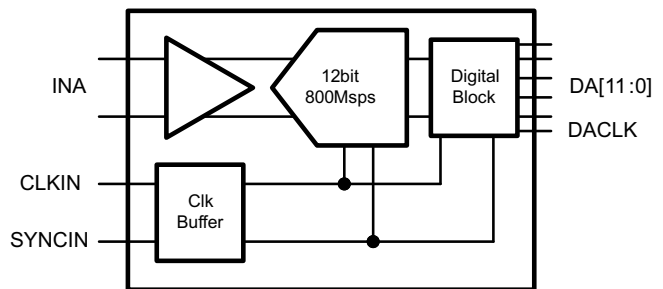

目录

1	特性	1	7.13	Typical Characteristics	12
2	应用	1	8	Detailed Description	18
3	说明	1	8.1	Overview	18
4	修订历史记录	2	8.2	Functional Block Diagram	18
5	Device Options	3	8.3	Feature Description	18
6	Pin Configuration and Functions	3	8.4	Device Functional Modes	23
7	Specifications	5	8.5	Programming	23
7.1	Absolute Maximum Ratings	5	8.6	Register Maps	25
7.2	ESD Ratings	5	9	Application and Implementation	34
7.3	Recommended Operating Conditions	5	9.1	Application Information	34
7.4	Thermal Information	6	9.2	Typical Application	34
7.5	Electrical Characteristics - Supply, Power Supply	6	10	Power Supply Recommendations	37
7.6	Electrical Characteristics - Analog Inputs, Dynamic Accuracy, Clock Input	7	11	Layout	38
7.7	Electrical Characteristics - Dynamic AC, Enabled	7	11.1	Layout Guidelines	38
7.8	Electrical Characteristics- Dynamic AC, Disabled	8	11.2	Layout Example	39
7.9	Electrical Characteristics - Over-Drive Recovery Error, Sample Timing	9	12	器件和文档支持	41
7.10	Electrical Characteristics - Digital Inputs, Digital Outputs	10	12.1	社区资源	41
7.11	Serial Register Write Timing Requirements	10	12.2	商标	41
7.12	Reset Timing Requirements	10	12.3	静电放电警告	41
			12.4	Glossary	41
			13	机械、封装和可订购信息	41

4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

Changes from Revision A (December 2013) to Revision B	Page
• 已添加 引脚配置和功能部分，ESD 额定值表，特性 描述 部分，器件功能模式，应用和 实施部分，电源相关建议部分，布局部分，器件和文档支持部分以及机械、封装和可订购信息部分	1

Changes from Original (April 2013) to Revision A	Page
• 已删除 text from last paragraph in INTERLEAVING CORRECTION section	21
• 已更改 text in second paragraph in MULTI DEVICE SYNCHRONIZATION section	22
• 已删除 Register Initialization section and added Device Initialization section	23
• 已更改 Register Address E Bits D1 and D2 to 0 in SERIAL REGISTER MAP	25
• 已更改 Register Address 38 Bits D3 to D0 from 0 to 1 in SERIAL REGISTER MAP	25
• 已更改 Register Address 1 Bit D14 from 1 to 0	27
• 已更改 Register Address E Bit D1 and D0 to 0	29
• 已更改 Register Address 38 Bits D3 to D0 from 0 to 1 and add D3 to D0 Read back 1	31
• 已更改 Register Address 66 D15-D10 to D15-D0 and DA11-D0 to DA11-DA0	33

5 Device Options

DEVICE PART NO.	NUMBER OF CHANNELS	SPEED GRADE
ADS5402	2	800 Msps
ADS5401	1	800 Msps
ADS5404	2	500 Msps
ADS5403	1	500 Msps
ADS5407	2	500 Msps
ADS5409	2	900 Msps

6 Pin Configuration and Functions

ZAY Package
196-Pin NFBGA
Top View

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	
14	VREF	VCM	GND	NC	NC	GND	AVDDC	AVDDC	GND	INA_P	INA_N	GND	GND	CLKINP	14
13	SDENB	TEST MODE	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	CLKINN	13
12	SCLK	SRESET B	GND	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	GND	AVDD33	AVDD33	12
11	SDIO	ENABLE	GND	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	GND	AVDD18	AVDD18	11
10	SDO	IOVDD	GND	AVDD18	GND	GND	GND	GND	GND	GND	AVDD18	GND	NC	NC	10
9	DVDD	DVDD	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	SYNCP	SYNCP	9
8	DVDD	DVDD	DVDD	DVDD	GND	GND	GND	GND	GND	GND	DVDD	DVDD	DVDD	DVDD	8
7	NC	NC	DVDD LVDS	DVDD LVDS	GND	GND	GND	GND	GND	GND	DVDD LVDS	DVDD LVDS	NC	NC	7
6	NC	NC	DVDD LVDS	DVDD LVDS	GND	GND	GND	GND	GND	GND	DVDD LVDS	DVDD LVDS	NC	NC	6
5	NC	NC	NC	NC	GND	GND	GND	GND	GND	GND	OVRAN	OVRAP	SYNC OUTN	SYNC OUTP	5
4	NC	NC	NC	NC	NC	NC	NC	DA0P	DA2P	DA4P	DA6P	DA8P	NC	NC	4
3	NC	NC	NC	NC	NC	NC	NC	DA0N	DA2N	DA4N	DA6N	DA8N	DA11N	DA11P	3
2	NC	NC	NC	NC	NC	NC	NC	DA0LKP	DA1P	DA3P	DA5P	DA7P	DA10N	DA10P	2
1	NC	NC	NC	NC	NC	NC	NC	DA0LKN	DA1N	DA3N	DA5N	DA7N	DA9N	DA9P	1
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
INPUT/REFERENCE			
INA_P/N	K14, L14	I	Analog ADC A differential input signal.
VCM	B14	O	Output of the analog input common-mode (nominally 1.9 V). A 0.1-μF capacitor to AGND is recommended.
VREF	A14	O	Reference voltage output (2-V nominal). A 0.1-μF capacitor to AGND is recommended, but not required.
CLOCK/SYNC			
CLKINP/N	P14, P13	I	Differential input clock
SYNCP/N	P9, N9	I	Synchronization input. Inactive if logic low. When clocked in a high state initially, this is used for resetting internal clocks and digital logic and starting the SYNCOUT signal. Internal 100-Ω termination.
CONTROL/SERIAL			
ENABLE	B11	I	Chip enable – active high. Power-down function can be controlled through SPI register assignment. Internal 50-kΩ pullup resistor to IOVDD.
SCLK	A12	I	Serial interface clock. Internal 50-kΩ pulldown resistor.
SDENB	A13	I	Serial interface enable. Internal 50-kΩ pulldown resistor.
SDIO	A11	I/O	Bidirectional serial data in 3 pin mode (default). In 4-pin interface mode (register x00, D16), the SDIO pin is an input only. Internal 50-kΩ pulldown.
SDO	A10	O	Unidirectional serial interface data in 4 pin mode (register x00, D16). The SDO pin is tri-stated in 3-pin interface mode (default). Internal 50-kΩ pulldown resistor.
SRESET	B12	I	Serial interface reset input. Active low. Initialized internal registers during high to low transition. Asynchronous. Internal 50-kΩ pullup resistor to IOVDD.
TESTMODE	B13	—	Factory internal test, do not connect
DATA INTERFACE			
DA[11:0]P/N	P3, N3, P2, N2, P1, N1, M4, M3, M2, M1, L4, L3, L2, L1, K4, K3, K2, K1, J4, J3, J2, J1, H4, H3	O	ADC A Data Bits 11 (MSB) to 0 (LSB) in DDR output mode. Standard LVDS output.
DACLKP/N	H2, H1	O	DDR differential output data clock for Bus A. Register programmable to provide either rising or falling edge to center of stable data nominal timing.
OVRAP/N	M5, L5	O	Bus A, Overrange indicator, LVDS output. A logic high signals an analog input in excess of the full-scale range. Optional SYNC output.
NC	A1, A2, A3, A4, A5, A6, A7, B1, B2, B3, B4, B5, B6, B7, C1, C2, C3, C4, C5, D1, D2, D3, D4, D5, D14, E1, E2, E3, E4, E14, F3, F4, G1, G2, G3, G4, N4, N6, N7, N10, P4, P6, P7, P10	—	Do not connect to pin
SYNCOUTP/N	F2, F1, P5, N5	O	Synchronization output signal for synchronizing multiple ADCs. Can be disabled through SPI.
POWER SUPPLY			
AVDD18	D10, D11, E11, F11, G11, H11, J11, K11, L10, L11, N11, P11	I	1.8-V analog supply
AVDD33	D12, E12, F12, G12, H12, J12, K12, L12, N12, P12	I	3.3-V analog supply
AVDDC	G14, H14	I	1.8-V supply for clock input
DVDD	A8, A9, B8, B9, C8, D8, L8, M8, N8, P8	I	1.8-V supply for digital block
DVDDLVD	C6, C7, D6, D7, L6, L7, M6, M7	I	1.8-V supply for LVDS outputs

Pin Functions (continued)

PIN		I/O	DESCRIPTION
NAME	NO.		
GND		I	Ground
IOVDD	B10	I	1.8-V for digital I/Os

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Supply voltage	AVDD33	–0.5	4	V
	AVDDC	–0.5	2.3	
	AVDD18	–0.5	2.3	
	DVDD	–0.5	2.3	
	DVDDLVS	–0.5	2.3	
	IOVDD	–0.5	4	
Voltage applied to input pins	INA_P, INA_N	–0.5	AVDD33 + 0.5	V
	CLKINP, CLKINN	–0.5	AVDDC + 0.5	V
	SYNCP, SYNCN	–0.5	AVDD33 + 0.5	V
	SRESET, SDENB, SCLK, SDIO, SDO, ENABLE	–0.5	IOVDD + 0.5	V
Operating free-air temperature, T _A		–40	85	°C
Operating junction temperature, T _J			150	°C
Storage temperature, T _{stg}		–65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

		VALUE	UNIT
V _(ESD) Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	2000	V
	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	750	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
SUPPLY					
Supply voltage	AVDD33	3.15	3.3	3.45	V
	AVDDC, AVDD18, DVDD, DVDDLVS	1.7	1.8	1.9	
	IOVDD	1.7	1.8	3.45	
GENERAL PARAMETERS					
ADC Clock Frequency		40		800	MSPS
Resolution		12			Bits
T _J	Recommended operating junction temperature	105			°C
	Maximum rated operating junction temperature ⁽¹⁾	125			
T _A	Recommended free-air temperature	−40	25	85	°C

- (1) Prolonged use at this junction temperature may increase the device failure-in-time (FIT) rate.

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		ADS5401	UNIT
		ZAY (NFBGA)	
		196 PINS	
R _{θJA}	Junction-to-ambient thermal resistance ⁽²⁾	37.6	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance ⁽³⁾	6.8	°C/W
R _{θJB}	Junction-to-board thermal resistance ⁽⁴⁾	16.8	°C/W
ψ _{JT}	Junction-to-top characterization parameter ⁽⁵⁾	0.2	°C/W
ψ _{JB}	Junction-to-board characterization parameter ⁽⁶⁾	16.4	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance ⁽⁷⁾	N/A	°C/W

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report (SPRA953).
- (2) The junction-to-ambient thermal resistance under natural convection is obtained in a simulation on a JEDEC-standard, high-K board, as specified in JESD51-7, in an environment described in JESD51-2a.
- (3) The junction-to-case (top) thermal resistance is obtained by simulating a cold plate test on the package top. No specific JEDEC-standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.
- (4) The junction-to-board thermal resistance is obtained by simulating in an environment with a ring cold plate fixture to control the PCB temperature, as described in JESD51-8.
- (5) The junction-to-top characterization parameter, ψ_{JT}, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining R_{θJA}, using a procedure described in JESD51-2a (sections 6 and 7).
- (6) The junction-to-board characterization parameter, ψ_{JB}, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining R_{θJA}, using a procedure described in JESD51-2a (sections 6 and 7).
- (7) The junction-to-case (bottom) thermal resistance is obtained by simulating a cold plate test on the exposed (power) pad. No specific JEDEC standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.

7.5 Electrical Characteristics - Supply, Power Supply

Typical values at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85 °C, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3V, AVDDC/AVDD18/DVDD/DVDDLVS/IOVDD = 1.8 V, –1 dBFS differential input (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
POWER SUPPLY					
I _{AVDD33}	3.3-V analog supply current		161	181	mA
I _{AVDD18}	1.8-V analog supply current		73	85	mA
I _{AVDDC}	1.8-V clock supply current		52	70	mA
I _{DVDD}	1.8-V digital supply current	Auto correction enabled	238	280	mA
I _{DVDD}	1.8-V digital supply current	Auto correction disabled	175		mA
I _{DVDD}	1.8-V digital supply current	Auto correction disabled, decimation filter enabled	190		mA
I _{DVDDLVS}	1.8-V LVDS supply current		80	100	mA
I _{IOVDD}	1.8-V I/O Voltage supply current		1	2	mA
P _{dis}	Total power dissipation	Auto correction enabled, decimation filter disabled	1.33	1.6	W
P _{dis}	Total power dissipation	Auto correction disabled, decimation filter disabled	1.22		W
PSRR	250kHz to 500MHz	40			dB
	Shut-down power dissipation		7		mW
	Shut-down wake-up time		2.5		ms
	Standby power dissipation		7		mW
	Standby wake-up time		100		μs
	Deep-sleep mode power dissipation	Auto correction disabled	295		mW
		Auto correction enabled	360		mW
	Deep-sleep mode wake-up time		20		μs
	Light-sleep mode power dissipation	Auto correction disabled	465		mW
		Auto correction enabled	530		mW
	Light-sleep mode wake-up time		2		μs

7.6 Electrical Characteristics - Analog Inputs, Dynamic Accuracy, Clock Input

Typical values at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD3V = 3.3V, AVDD/DRVDD/IOVDD = 1.8 V, –1 dBFS differential input (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
ANALOG INPUTS					
Differential input full-scale			1.0		V _{pp}
Input common-mode voltage			1.9	±0.1	V
Input resistance	Differential at DC		1		kΩ
Input capacitance	Each input to GND		2		pF
VCM common-mode voltage output			1.9		V
Analog input bandwidth (3dB)			1200		MHz
DYNAMIC ACCURACY					
Offset Error	Auto correction disabled	–20	±6	20	mV
	Auto correction enabled	–1	0	1	mV
Offset temperature coefficient			–10		μV/°C
Gain error		–5	±0.6	5	%FS
Gain temperature coefficient			0.003		%FS/°C
Differential nonlinearity	$f_{\text{IN}} = 230 \text{ MHz}$	–1	±0.8	2	LSB
Integral nonlinearity	$f_{\text{IN}} = 230 \text{ MHz}$	–5	±2	5	LSB
CLOCK INPUT					
Input clock frequency		40		800	MHz
Input clock amplitude			2		V _{pp}
Input clock duty cycle		40%	50%	60%	
Internal clock biasing			0.9		V

7.7 Electrical Characteristics - Dynamic AC, Enabled

Typical values at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3V, AVDDC / AVDD18 / DVDD / DVDDLVS / IOVDD = 1.8 V, –1 dBFS differential input (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Auto Correction			Enabled		V _{pp}
DYNAMIC AC CHARACTERISTICS⁽¹⁾					
SNR	Signal-to-Noise Ratio	$f_{\text{IN}} = 10 \text{ MHz}$		61.7	dBFS
		$f_{\text{IN}} = 100 \text{ MHz}$		61.7	
		$f_{\text{IN}} = 230 \text{ MHz}$	58	61.3	
		$f_{\text{IN}} = 450 \text{ MHz}$		60.7	
		$f_{\text{IN}} = 700 \text{ MHz}$		59.8	
HD2,3	Second and third harmonic distortion	$f_{\text{IN}} = 10 \text{ MHz}$		78	dBc
		$f_{\text{IN}} = 100 \text{ MHz}$		77	
		$f_{\text{IN}} = 230 \text{ MHz}$	67	77	
		$f_{\text{IN}} = 450 \text{ MHz}$		76	
		$f_{\text{IN}} = 700 \text{ MHz}$		74	
Non HD2,3	Spur free dynamic range (excluding second and third harmonic distortion $F_{\text{s}}/2 - F_{\text{IN}}$ spur)	$f_{\text{IN}} = 10 \text{ MHz}$		81	dBc
		$f_{\text{IN}} = 100 \text{ MHz}$		79	
		$f_{\text{IN}} = 230 \text{ MHz}$	67	78	
		$f_{\text{IN}} = 450 \text{ MHz}$		78	
		$f_{\text{IN}} = 700 \text{ MHz}$		76	

(1) SFDR and SNR calculations do not include the DC or $F_{\text{s}}/2$ bins when Auto Correction is disabled.

Electrical Characteristics - Dynamic AC, Enabled (接下页)

Typical values at $T_A = 25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = 85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3V, AVDDC / AVDD18 / DVDD / DVDDLVS / IOVDD = 1.8 V, -1 dBFS differential input (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
IL	Fs/2-Fin interleaving spur	$f_{\text{IN}} = 10 \text{ MHz}$	91		dBc
		$f_{\text{IN}} = 100 \text{ MHz}$	81		
		$f_{\text{IN}} = 230 \text{ MHz}$	63	74	
		$f_{\text{IN}} = 450 \text{ MHz}$		72	
		$f_{\text{IN}} = 700 \text{ MHz}$		69	
SINAD	Signal-to-noise and distortion ratio	$f_{\text{IN}} = 10 \text{ MHz}$	61.6		dBFS
		$f_{\text{IN}} = 100 \text{ MHz}$	61.4		
		$f_{\text{IN}} = 230 \text{ MHz}$	57.7	61	
		$f_{\text{IN}} = 450 \text{ MHz}$		60.5	
		$f_{\text{IN}} = 700 \text{ MHz}$		59.5	
THD	Total Harmonic Distortion	$f_{\text{IN}} = 10 \text{ MHz}$	75		dBc
		$f_{\text{IN}} = 100 \text{ MHz}$	73		
		$f_{\text{IN}} = 230 \text{ MHz}$	66	73	
		$f_{\text{IN}} = 450 \text{ MHz}$		74	
		$f_{\text{IN}} = 700 \text{ MHz}$		72	
IMD3	Inter modulation distortion	$F_{\text{in}} = 169.5 \text{ and } 170.5 \text{ MHz, -7dBFS}$	76		dBFS
		$F_{\text{in}} = 649.5 \text{ and } 650.5 \text{ MHz, -7dBFS}$	70		
	Crosstalk		90		dB
ENOB	Effective number of bits	$f_{\text{IN}} = 230 \text{ MHz}$	9.8		LSB

7.8 Electrical Characteristics- Dynamic AC, Disabled

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Auto correction			Disabled			Vpp
DYNAMIC AC CHARACTERISTICS ⁽¹⁾						
SNR	Signal to Noise Ratio	f _{IN} = 10 MHz	61.8			dBFS
		f _{IN} = 100 MHz	61.8			
		f _{IN} = 230 MHz	61.5			
		f _{IN} = 450 MHz	61.1			
		f _{IN} = 700 MHz	60.6			
HD2,3	Second and third harmonic distortion	f _{IN} = 10 MHz	80			dBc
		f _{IN} = 100 MHz	77			
		f _{IN} = 230 MHz	79			
		f _{IN} = 450 MHz	77			
		f _{IN} = 700 MHz	75			
Non HD2,3	Spur Free Dynamic Range (excluding second and third harmonic distortion Fs/2 – F _{IN} spur)	f _{IN} = 10 MHz	83			dBc
		f _{IN} = 100 MHz	81			
		f _{IN} = 230 MHz	79			
		f _{IN} = 450 MHz	79			
		f _{IN} = 700 MHz	77			

(1) SFDR and SNR calculations do not include the DC or Fs/2 bins when Auto Correction is disabled.

Electrical Characteristics- Dynamic AC, Disabled (接下页)

over operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
IL	Fs/2-Fin interleaving spur	$f_{IN} = 10 \text{ MHz}$	84		dBc
		$f_{IN} = 100 \text{ MHz}$	80		
		$f_{IN} = 230 \text{ MHz}$	75		
		$f_{IN} = 450 \text{ MHz}$	71		
		$f_{IN} = 700 \text{ MHz}$	69		
SINAD	Signal to noise and distortion ratio	$f_{IN} = 10 \text{ MHz}$	61.7		dBFS
		$f_{IN} = 100 \text{ MHz}$	61.6		
		$f_{IN} = 230 \text{ MHz}$	61.3		
		$f_{IN} = 450 \text{ MHz}$	61		
		$f_{IN} = 700 \text{ MHz}$	60.3		
THD	Total Harmonic Distortion	$f_{IN} = 10 \text{ MHz}$	77		dBc
		$f_{IN} = 100 \text{ MHz}$	75		
		$f_{IN} = 230 \text{ MHz}$	74		
		$f_{IN} = 450 \text{ MHz}$	75		
		$f_{IN} = 700 \text{ MHz}$	72		
IMD3	Inter modulation distortion	$F_{in} = 169.5 \text{ and } 170.5 \text{ MHz, } -7\text{dBFS}$	76		dBFS
		$F_{in} = 649.5 \text{ and } 650.5 \text{ MHz, } -7\text{dBFS}$	72		
	Crosstalk		90		dB
ENOB	Effective number of bits	$f_{IN} = 230 \text{ MHz}$	9.8		LSB

7.9 Electrical Characteristics - Over-Drive Recovery Error, Sample Timing

Typical values at $T_A = 25^\circ\text{C}$, full temperature range is $T_{MIN} = -40^\circ\text{C}$ to $T_{MAX} = 85^\circ\text{C}$, ADC sampling rate = 800Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVS/IOVDD = 1.8 V, -1 dBFS differential input (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OVER-DRIVE RECOVERY ERROR					
Input overload recovery	Recovery to within 1% (of final value) for 6dB overload with sine wave input		2		Output Clock
SAMPLE TIMING CHARACTERISTICS					
Aperture Jitter	Sample uncertainty		100		fs rms
Data Latency	ADC sample to digital output, auto correction disabled		38		Clock Cycles
	ADC sample to digital output, auto correction enabled		50		
	ADC sample to digital output, Decimation filter enabled, Auto correction disabled		74		Sampling Clock Cycles
Over-range Latency	ADC sample to over-range output		12		Clock Cycles

7.10 Electrical Characteristics - Digital Inputs, Digital Outputs

The DC specifications refer to the condition where the digital outputs are not switching, but are permanently at a valid logic level 0 or 1. AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVS/IOVDD = 1.8 V

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DIGITAL INPUTS – SRESET, SCLK, SDENB, SDIO, ENABLE						
High-level input voltage		All digital inputs support 1.8-V and 3.3-V logic levels.	0.7 x IOVDD		V	
Low-level input voltage			0.3 x IOVDD		V	
High-level input current			–50	200	μA	
Low-level input current			–50	50	μA	
Input capacitance			5		pF	
DIGITAL OUTPUTS – SDO						
High-level output voltage		I _{load} = -100 μA	IOVDD – 0.2		V	
		I _{load} = -2 mA	0.8 x IOVDD			
Low-level output voltage		I _{load} = 100 μA	0.2		V	
		I _{load} = 2 mA	0.22 x IOVDD			
DIGITAL INPUTS – SYNC/P/N						
V _{ID}	Differential input voltage		250	350	450	mV
V _{CM}	Input common-mode voltage		1.125	1.2	1.375	V
t _{SU}			500			ps
DIGITAL OUTPUTS – DA[11:0]P/N, DACLK/P/N, OVRAP/N, SYNCOUTP/N						
V _{OD}	Output differential voltage	I _{OUT} = 3.5 mA	250	350	450	mV
V _{OCM}	Output common-mode voltage	I _{OUT} = 3.5 mA	1.125	1.25	1.375	V
t _{SU}		F _S = 800 Msps, Data valid to zero-crossing of DACLK	230	450		ps
t _H		F _S = 800 Msps, Zero-crossing of DACLK to data becoming invalid	230	410		ps
t _{PD}		F _S = 800 Msps, CLKIN falling edge to DACLK, DBCLK rising edge	3.36	3.69	3.92	ns
t _{RISE}		10% - 90%	100	150	200	ps
t _{FALL}		90% - 10%	100	150	200	ps

7.11 Serial Register Write Timing Requirements

		MIN	MAX	UNIT
f _{SCLK}	SCLK frequency (equal to 1/tSCLK)	> DC	20	MHz
t _{SLOADS}	SDENB to SCLK setup time	25		ns
t _{SLOADH}	SCLK to SDENB hold time	25		ns
t _{DSU}	SDIO setup time	25		ns
t _{DH}	SDIO hold time	25		ns

7.12 Reset Timing Requirements

	MIN	NOM	MAX	UNIT
t ₁	Power-on delay	Delay from power up to active low RESET pulse	3	ms
t ₂	Reset pulse width	Active low RESET pulse width	20	ns
t ₃	Register write delay	Delay from RESET disable to SDENb active	100	ns

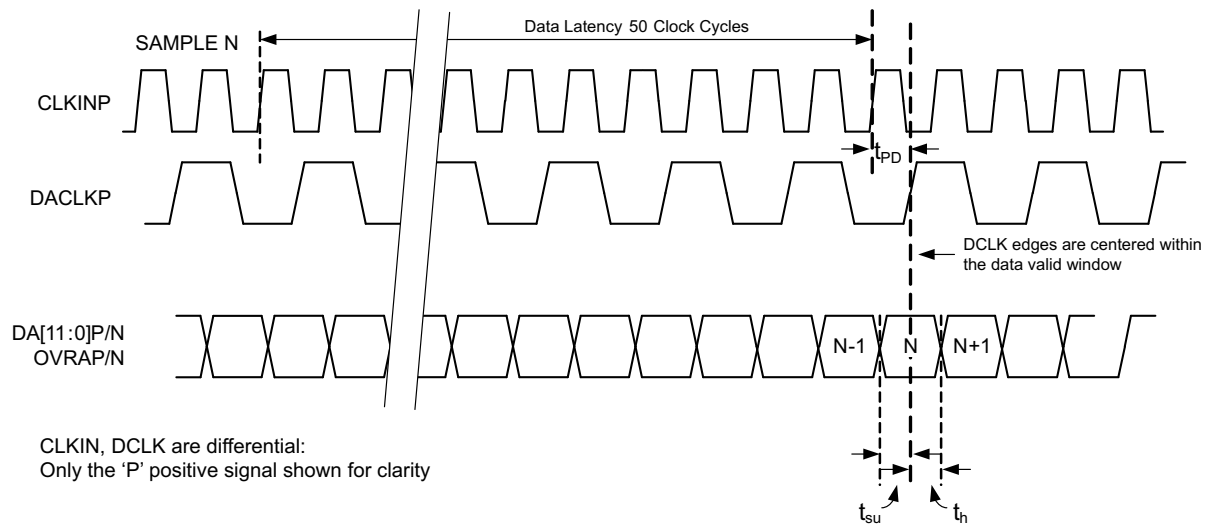


图 1. Timing Diagram for 12-Bit DDR Output

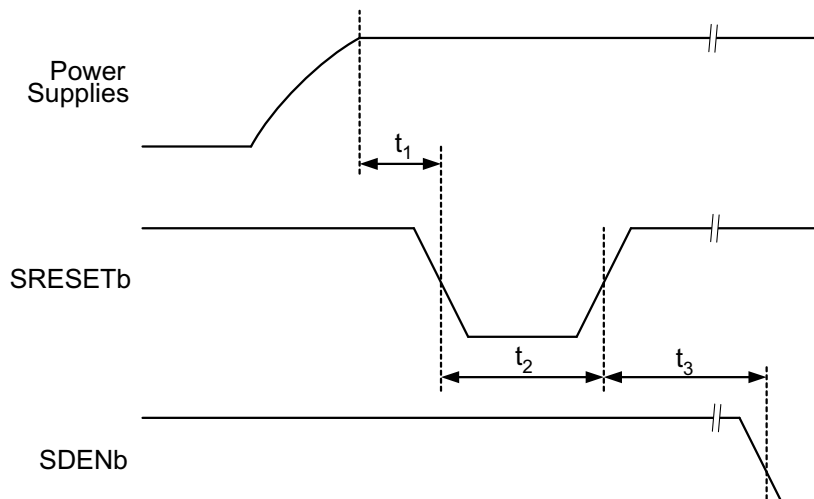


图 2. Device Initialization Timing Diagram

7.13 Typical Characteristics

Typical values at $T_A = +25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = +85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC /AVDD18 / DVDD / DVDDLVDs / IOVDD = 1.8 V, -1dBFS differential input, unless otherwise noted.

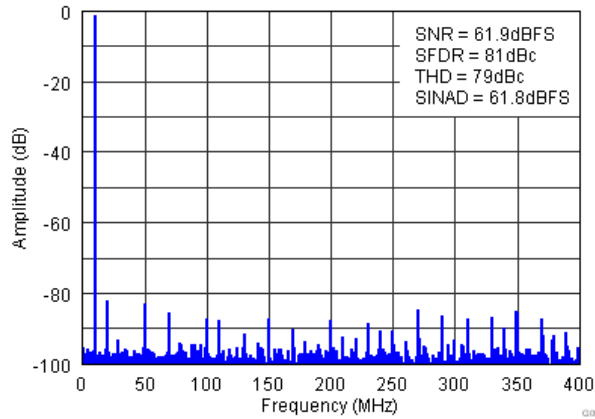


图 3. FFT for 10-MHz Input Signal (Auto On)

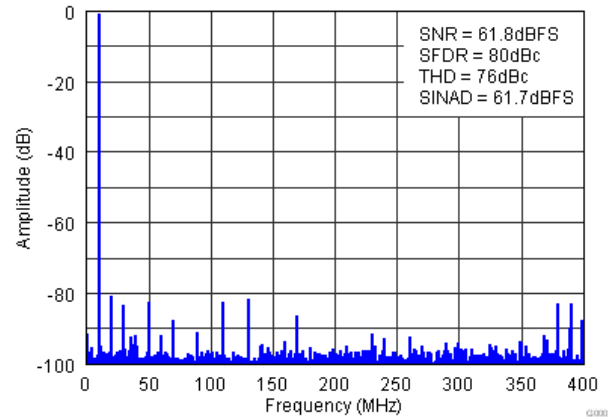


图 4. FFT for 10-MHz Input Signal (Auto Off)

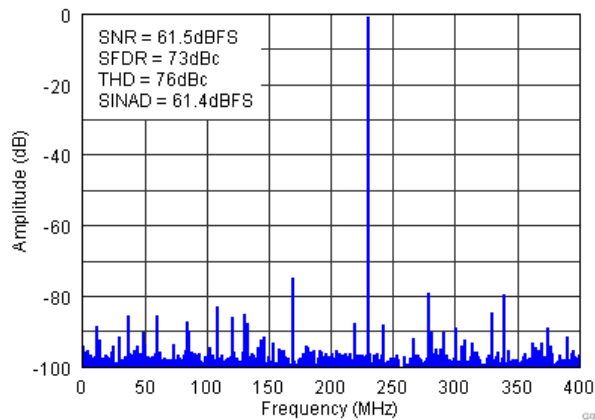


图 5. FFT for 230-MHz Input Signal (Auto On)

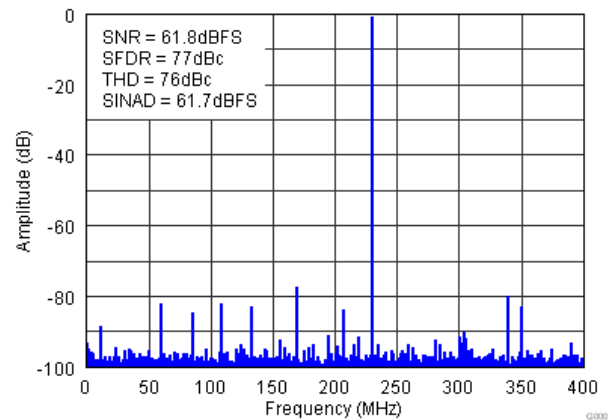


图 6. FFT for 230-MHz Input Signal (Auto Off)

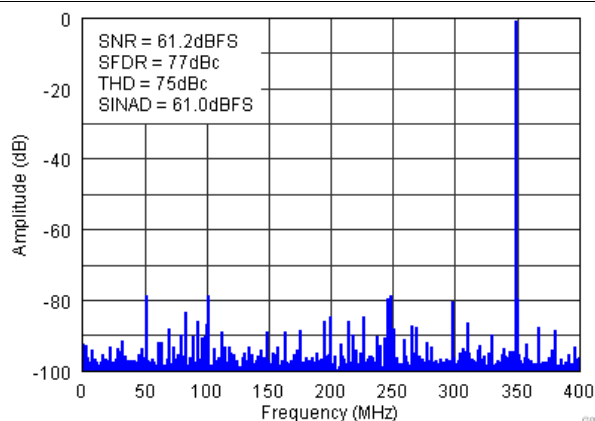


图 7. FFT for 450-MHz Input Signal (Auto On)

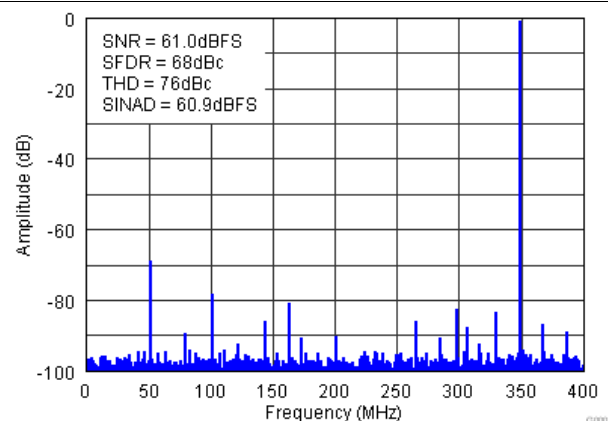


图 8. FFT for 450-MHz Input Signal (Auto Off)

Typical Characteristics (接下页)

Typical values at $T_A = +25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = +85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC / AVDD18 / DVDD / DVDDLVDVS / IOVDD = 1.8 V, -1dBFS differential input, unless otherwise noted.

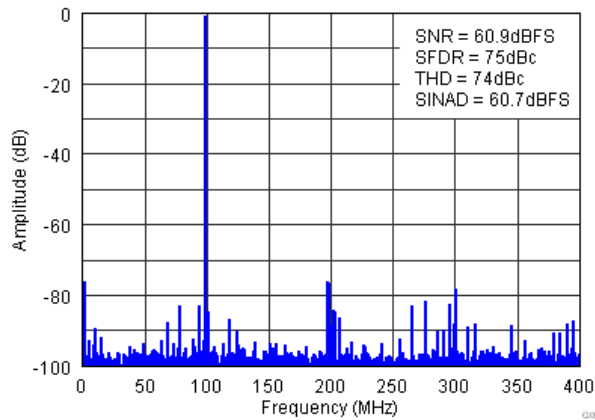


图 9. FFT for 700-MHz Input Signal (Auto On)

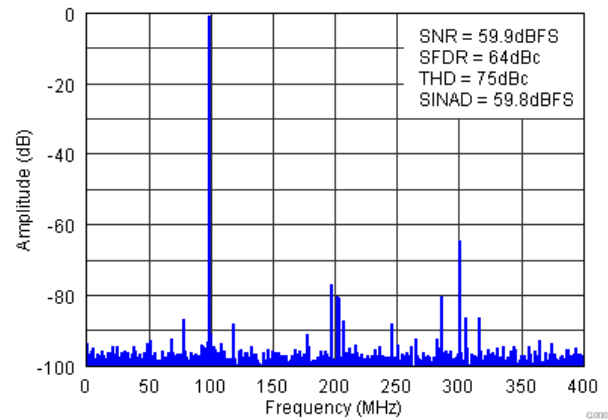


图 10. FFT for 700-MHz Input Signal (Auto Off)

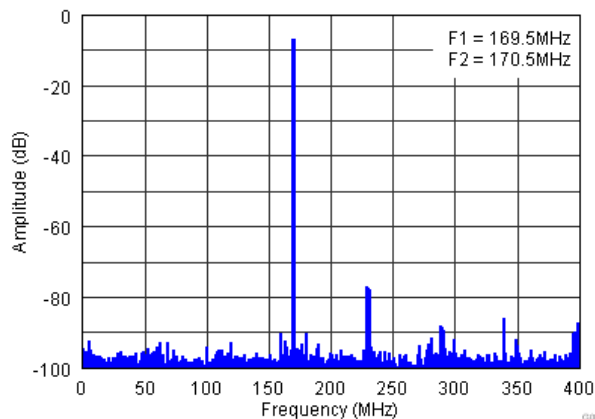


图 11. FFT for Two Tone Input Signal (Auto On)

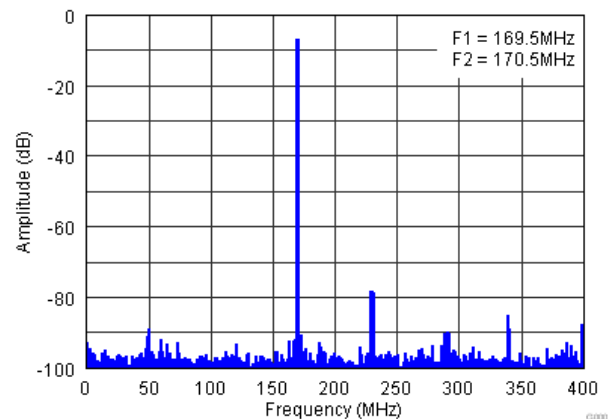


图 12. FFT for Two Tone Input Signal (Auto Off)

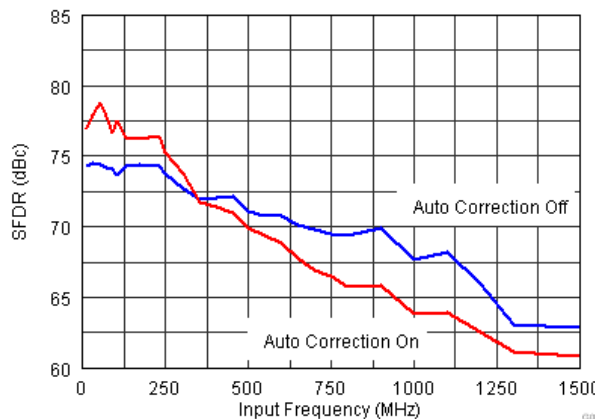


图 13. SFDR vs Input Frequency

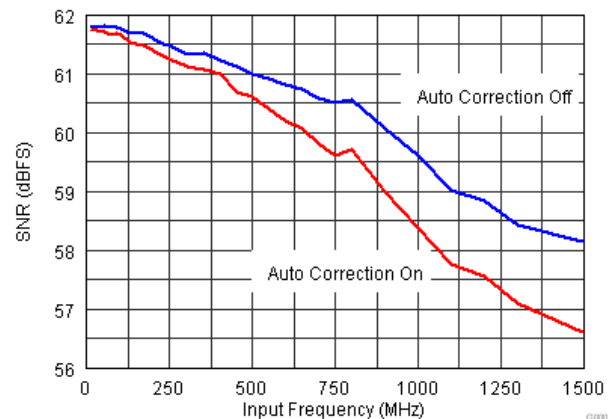


图 14. SNR vs Input Frequency

Typical Characteristics (接下页)

Typical values at $T_A = +25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = +85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC / AVDD18 / DVDD / DVDDLVD / IOVDD = 1.8 V, -1dBFS differential input, unless otherwise noted.

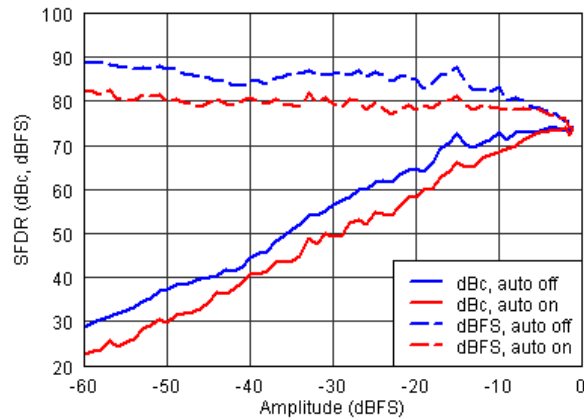


图 15. SFDR vs Amplitude ($f_{\text{in}} = 230 \text{ MHz}$)

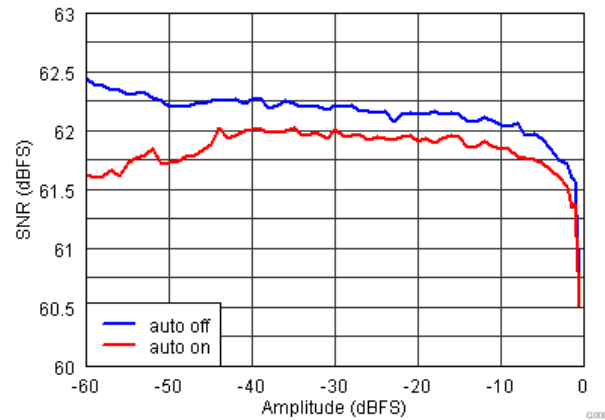


图 16. SNR vs Amplitude ($f_{\text{in}} = 230 \text{ MHz}$)

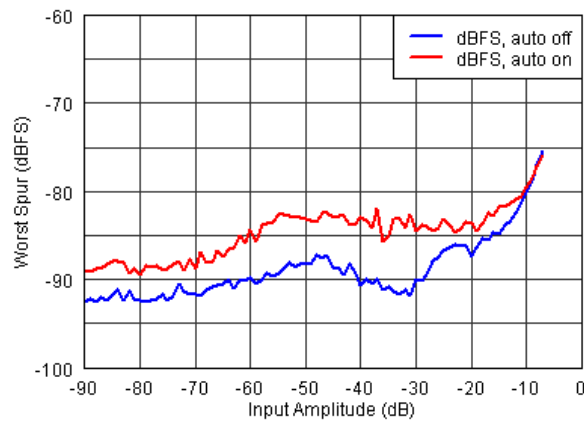


图 17. Tow Tone Performance Across Input Amplitude ($f_{\text{in}} = 170 \text{ MHz}$)

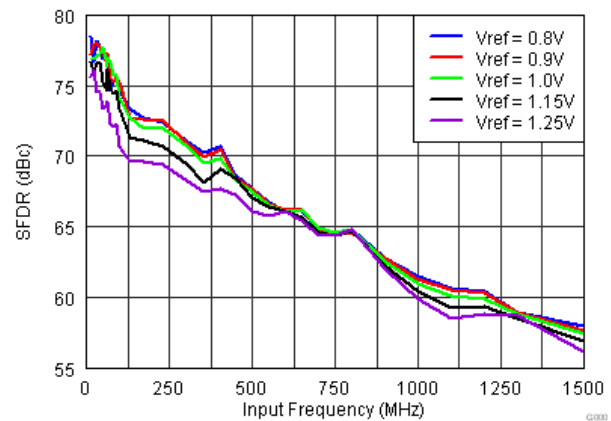


图 18. SFDR vs Vref (Auto On)

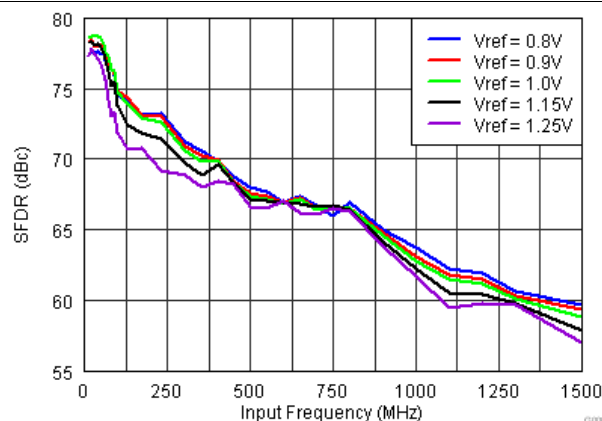


图 19. SFDR vs Vref (Auto Off)

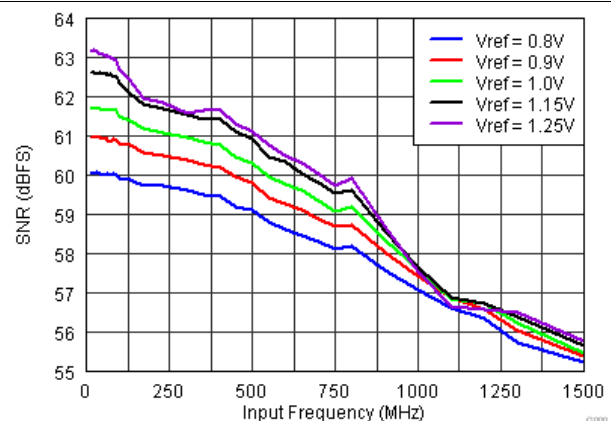


图 20. SNR vs Vref (Auto On)

Typical Characteristics (接下页)

Typical values at $T_A = +25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = +85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC / AVDD18 / DVDD / DVDDLVDs / IOVDD = 1.8 V, -1dBFS differential input, unless otherwise noted.

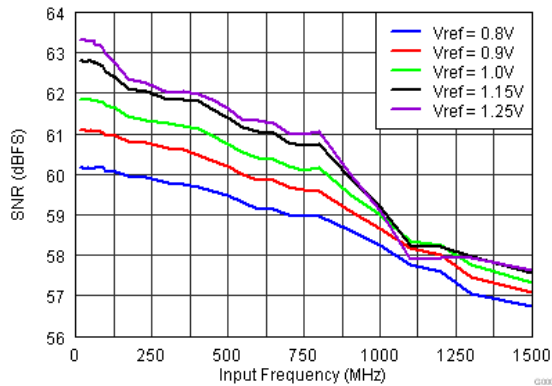


图 21. SNR vs Vref (Auto Off)

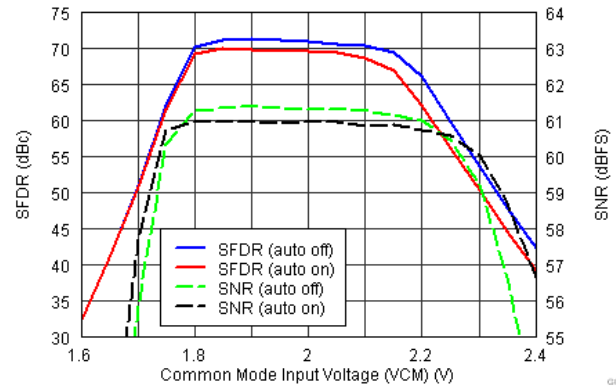


图 22. Performance Across Input Common-Mode Voltage ($f_{\text{in}} = 230 \text{ MHz}$)

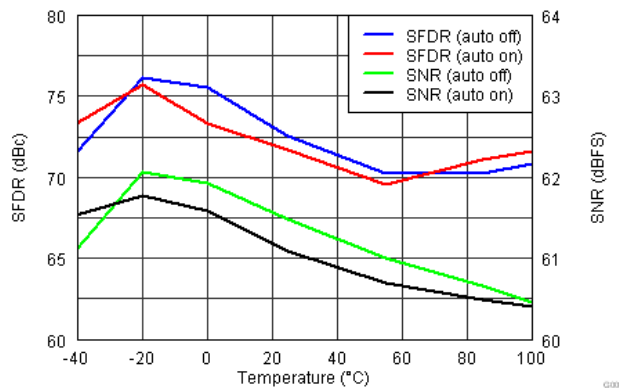


图 23. Performance Across Temperature ($f_{\text{in}} = 230 \text{ MHz}$)

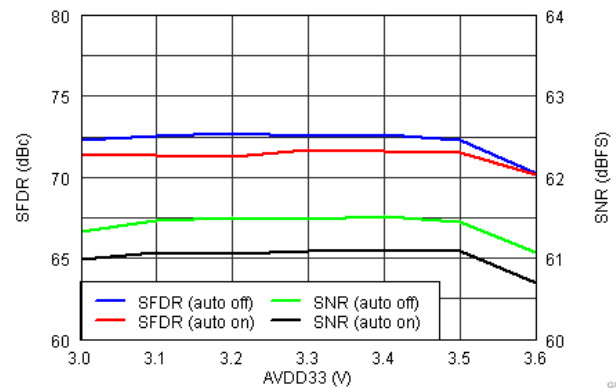


图 24. Performance Across AVDD33 ($f_{\text{in}} = 230 \text{ MHz}$)

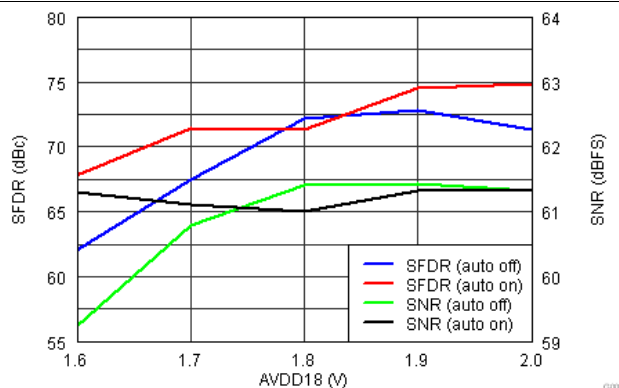


图 25. Performance Across AVDD18 ($f_{\text{in}} = 230\text{MHz}$)

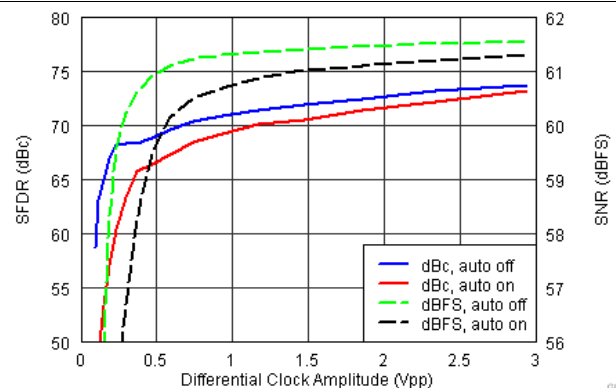


图 26. Performance Across Clock Amplitude

Typical Characteristics (接下页)

Typical values at $T_A = +25^{\circ}\text{C}$, full temperature range is $T_{\text{MIN}} = -40^{\circ}\text{C}$ to $T_{\text{MAX}} = +85^{\circ}\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC /AVDD18 / DVDD / DVDDLVDs / IOVDD = 1.8 V, -1dBFS differential input, unless otherwise noted.

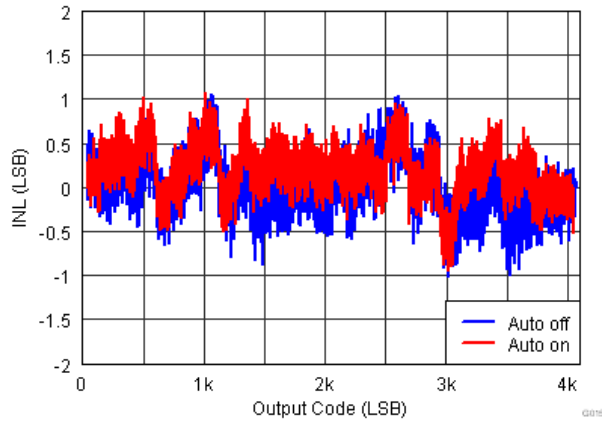


图 27. INL

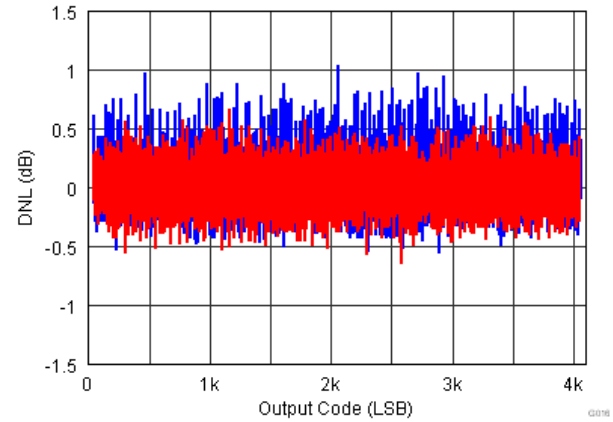


图 28. DNL

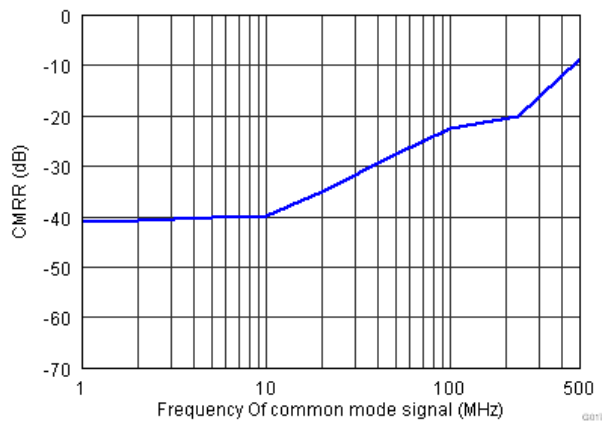


图 29. CMRR Across Frequency

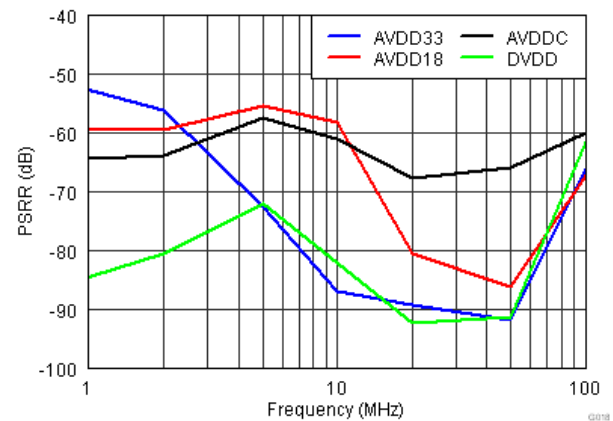


图 30. PSRR Across Frequency

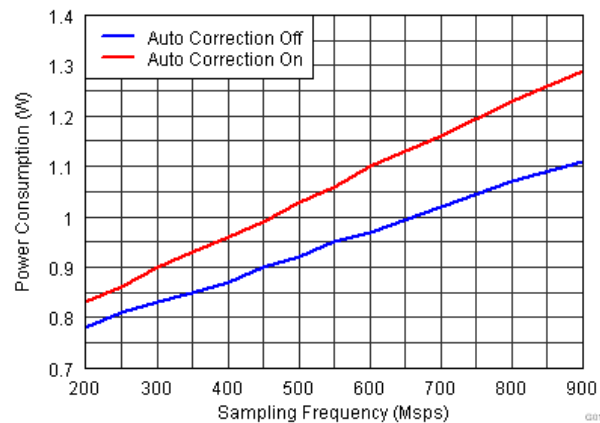


图 31. Power Across Sampling Frequency

Typical Characteristics (接下页)

Typical values at $T_A = +25^\circ\text{C}$, full temperature range is $T_{\text{MIN}} = -40^\circ\text{C}$ to $T_{\text{MAX}} = +85^\circ\text{C}$, ADC sampling rate = 800 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC / AVDD18 / DVDD / DVDDLVDs / IOVDD = 1.8 V, -1dBFS differential input, unless otherwise noted.

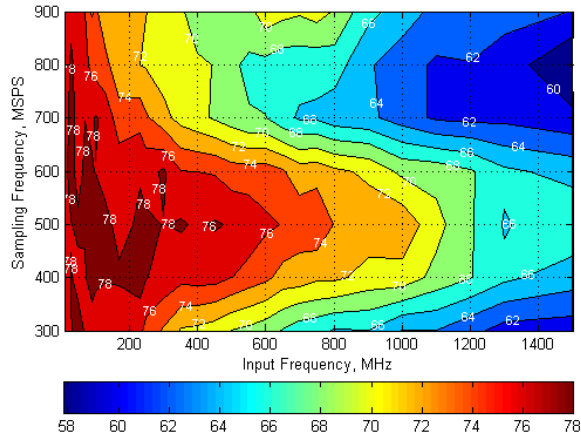


图 32. SFDR Across Input and Sampling Frequencies (Auto On)

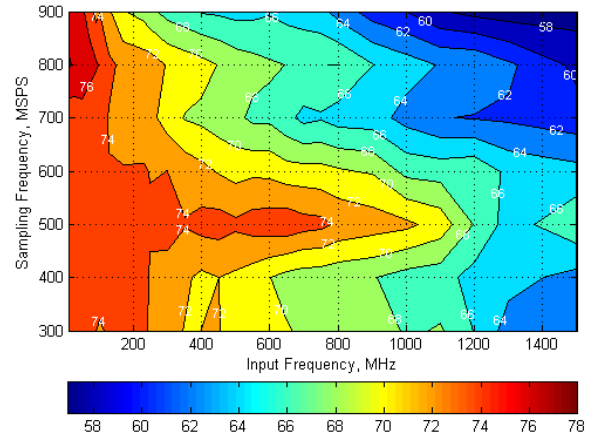


图 33. SFDR Across Input and Sampling Frequencies (Auto Off)

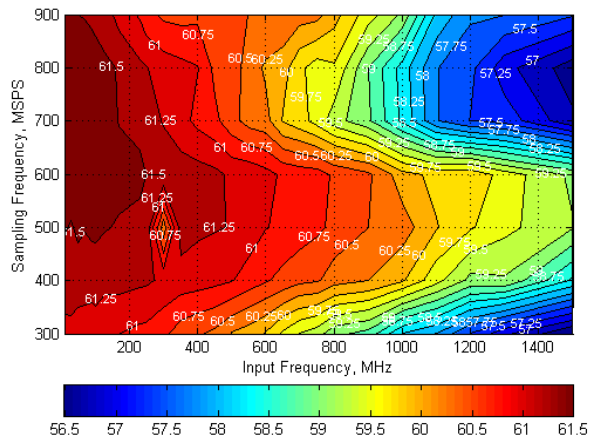


图 34. SNR Across Input and Sampling Frequencies (Auto On)

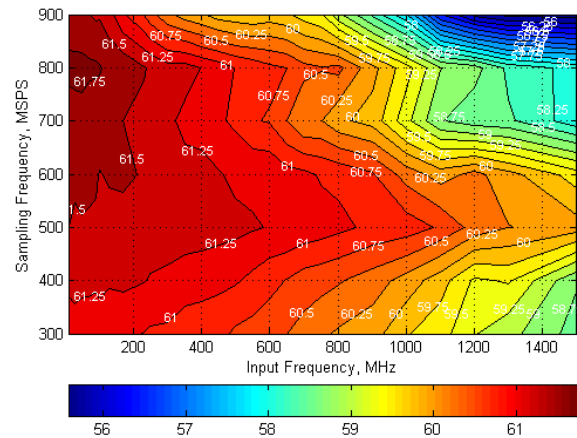



图 35. SNR Across Input and Sampling Frequencies (Auto On)

8 Detailed Description

8.1 Overview

The ADS5401 is a wide bandwidth 12-bit 800-Msps single-channel ADC. Designed for high SFDR, the ADS has low-noise performance and outstanding spurious-free dynamic range over a large input frequency. The buffered analog input provides uniform input impedance across a wide frequency range while minimizing sample-and-hold glitch energy. The ADC also provides an option to decimate the output data by two.

8.2 Functional Block Diagram

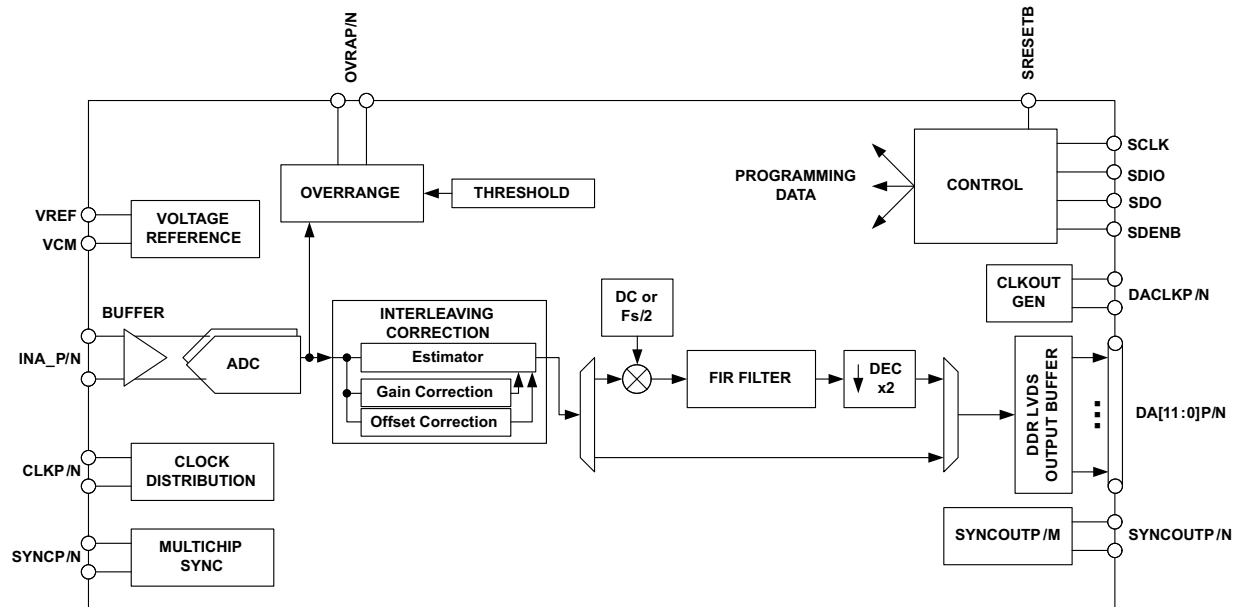

8.3 Feature Description

8.3.1 Test Pattern Output

The ADS5401 can be configured to output different test patterns that can be used to verify the digital interface is connected and working properly. To enable test pattern mode, high performance mode 1 has to be disabled first through a SPI register write. Then different test patterns can be selected by configuring registers x3C, x3D and x3E. All three registers must be configured for the test pattern to work properly.

First set HP1 = 0 (Addr 0x01, D01).

表 1. Test Pattern Register Configurations

REGISTER ADDRESS	ALL 0s	ALL 1s	TOGGLE (0xAAA => 0x555)	TOGGLE (0xFFFF => 0x000)
0x3C	0x8000	0xBFFC	0x9554	0xBFFC
0x3D	0x0000	0x3FFC	0x2AA8	0x0000
0x3E	0x0000	0x3FFC	0x1554	0x3FFC

表 2. Custom Test Patterns

REGISTER ADDRESS	CUSTOM PATTERN															
	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
x3C	1	0	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	0	0
x3D	0	0													0	0
x3E	0	0													0	0

For normal operation, set HP1 = 1 (Addr 0x01, D01) and 0x3C, 0x3D, 0x3E all to 0.

8.3.2 Clock Input

The ADS5401 clock input can be driven differentially with a sine wave, LVPECL or LVDS source with little or no difference in performance. The common-mode voltage of the clock input is set to 0.9 V using internal 2-k Ω resistors. This allows for AC coupling of the clock inputs. The termination resistors should be placed as close as possible to the clock inputs in order to minimize signal reflections and jitter degradation.

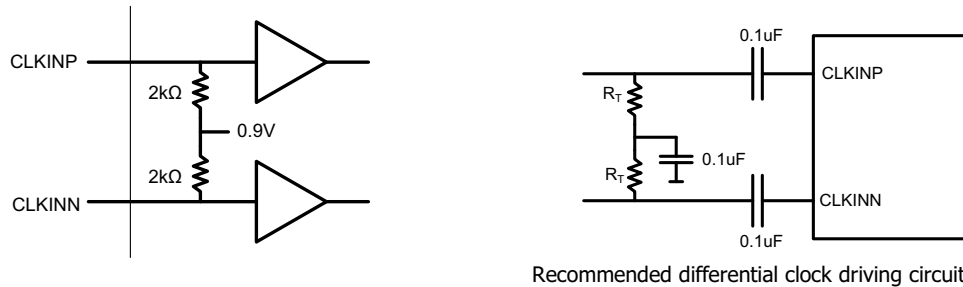


图 36. Recommended Differential Clock Driving Circuit

8.3.3 Analog Inputs

The ADS5401 analog signal input is designed to be driven differentially. The analog input pins have internal analog buffers that drive the sampling circuit. As a result of the analog buffer, the input pins present a high impedance input across a very wide frequency range to the external driving source which enables great flexibility in the external analog filter design as well as excellent 50- Ω matching for RF applications. The buffer also helps to isolate the external driving circuit from the internal switching currents of the sampling circuit which results in a more constant SFDR performance across input frequencies.

The common-mode voltage of the signal input is internally biased to 1.9 V using 500- Ω resistors which allows for AC coupling of the input drive network. Each input pin (INP, INM) must swing symmetrically between ($V_{CM} + 0.25$ V) and ($V_{CM} - 0.25$ V), resulting in a 1.0-V_{pp} (default) differential input swing. The input sampling circuit has a 3-dB bandwidth that extends up to 1.2 GHz.

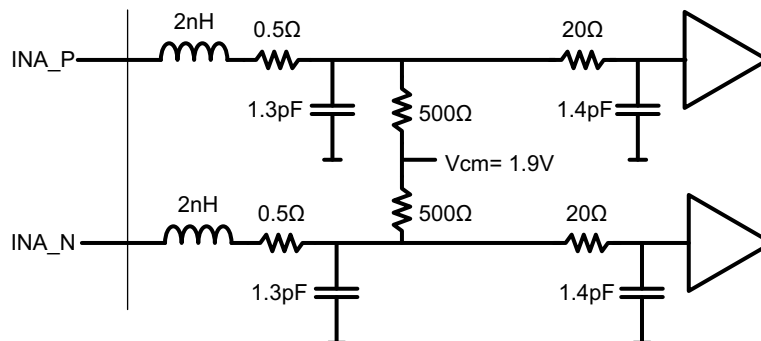


图 37. Equivalent Analog Input Circuit

8.3.4 Overrange Indication

The ADS5401 provides a fast overrange indication on the OVRA pins. The fast OVR is triggered if the input voltage exceeds the programmable overrange threshold and it gets presented after just 12 clock cycles enabling a quicker reaction to an overrange event. The OVR threshold can be configured using SPI register writes.

The input voltage level at which the overload is detected is referred to as the threshold and is programmable using the overrange threshold bits. The threshold at which fast OVR is triggered is (full-scale $\times$ [the decimal value of the FAST OVR THRESH bits] /16). After reset, the default value of the overrange threshold is set to 15 (decimal) which corresponds to a threshold of 0.56 dB below full scale ($20 \times \log(15/16)$).

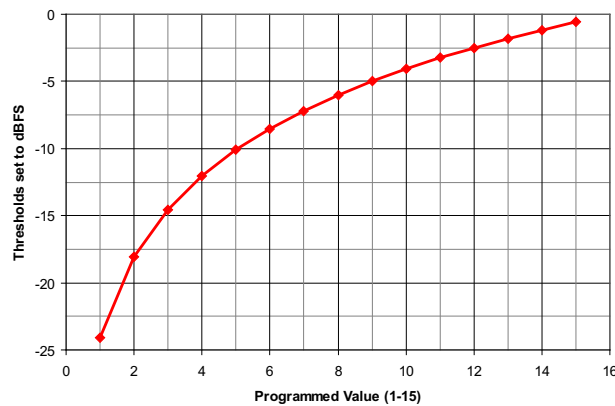


图 38. OVR Detection Threshold

8.3.5 Interleaving Correction

The two data converter channel consists of two interleaved ADCs each operating at half of the ADC sampling rate but 180° out of phase from each other. The front end track and hold circuitry is operating at the full ADC sampling rate which minimizes the timing mismatch between the two interleaved ADCs. In addition the ADS5401 is equipped with internal interleaving correction logic that can be enabled through SPI register write.

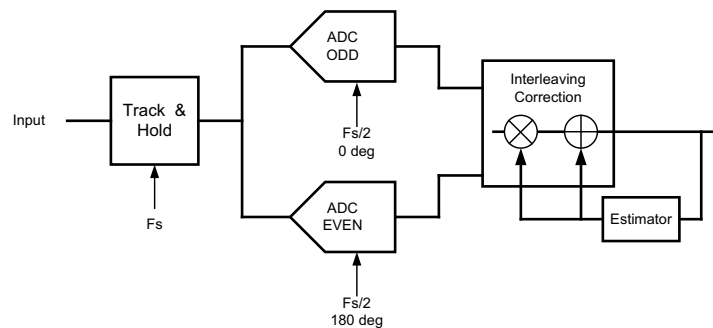


图 39. Interleaving Correction Circuit

The interleaving operation creates 2 distinct and interleaving products:

- $F_s/2 - F_{in}$: this spur is created by gain timing mismatch between the ADCs. Because internally the front end track and hold is operated at the full sampling rate, this component is greatly improved and mostly dependent on gain mismatch.
- $F_s/2$ Spur: due to offset mismatch between ADCs.

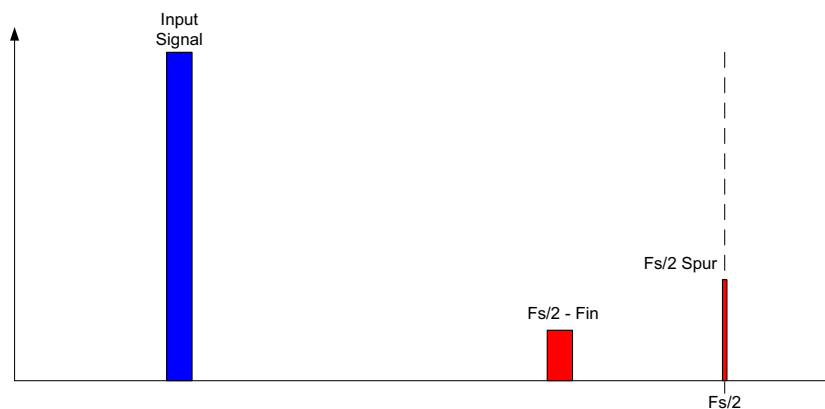


图 40. Interleaving Spur at $F_s/2$ due to Offset Mismatch

The auto correction loop can be enabled through SPI register write in address 0x01 and resetting the correction circuit in address 0x03. By default it is disabled for lowest possible power consumption.

The auto correction function yields best performance for input frequencies below 250 MHz.

8.3.6 Decimation Filter

There is an optional digital decimation filter in the data path as shown in 图 41. The filter can be programmed as a lowpass or a highpass filter and the normalized frequency response of both filters is shown in 图 42.

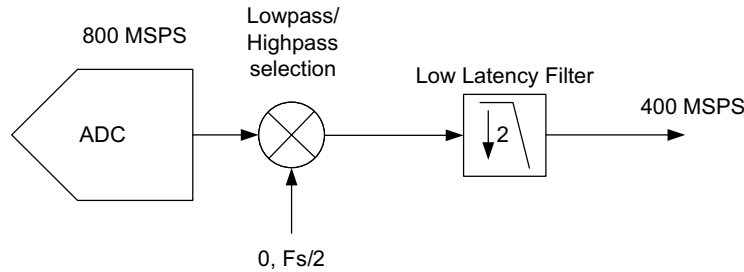


图 41. 2x Decimation Filter

The decimation filter response has a 0.1-dB pass band ripple with approximately 41% pass-band bandwidth. The stop-band attenuation is approximately 40 dB.

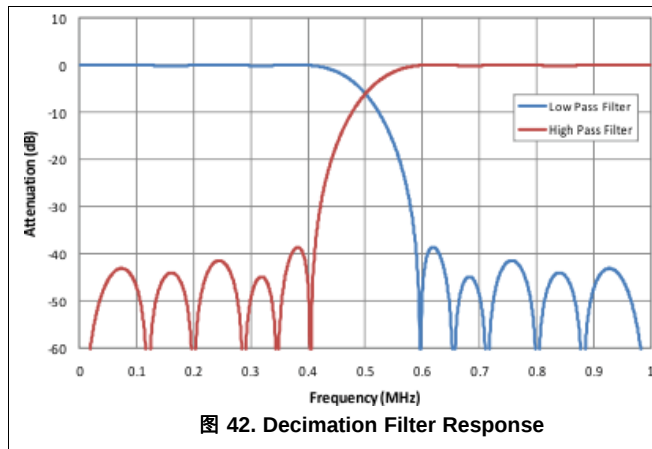


图 42. Decimation Filter Response

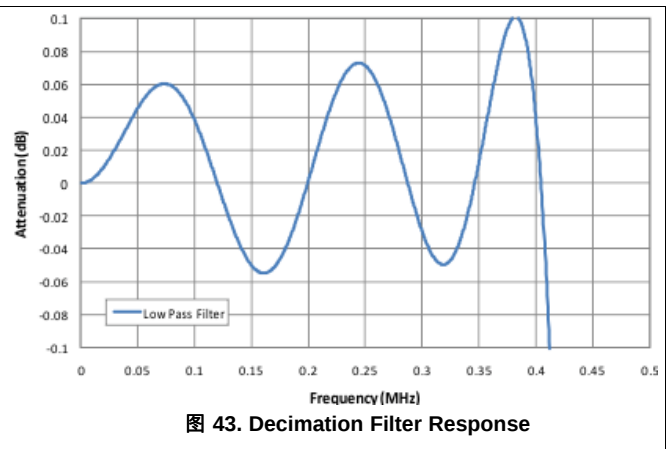


图 43. Decimation Filter Response

8.3.7 Multi Device Synchronization

The ADS5401 simplifies the synchronization of data from multiple ADCs in one common receiver. Upon receiving the initial SYNC input signal, the ADS5401 resets all the internal clocks and digital logic while also starting a SYNCOUT signal which operates on a 5-bit counter (32 clock cycles). Therefore by providing a common SYNC signal to multiple ADCs their output data can be synchronized as the SYNCOUT signal marks a specific sample with the same latency in all ADCs. The SYNCOUT signal then can be used in the receiving device to synchronize the FIFO pointers across the different input data streams. Thus the output data of multiple ADCs can be aligned properly even if there are different trace lengths between the different ADCs. By default ADS5401 is not configured for multi device synchronization. The ADC can be configured by setting the SYNCOUT enable bit (D2 config1) to 1 on all the ADCs.

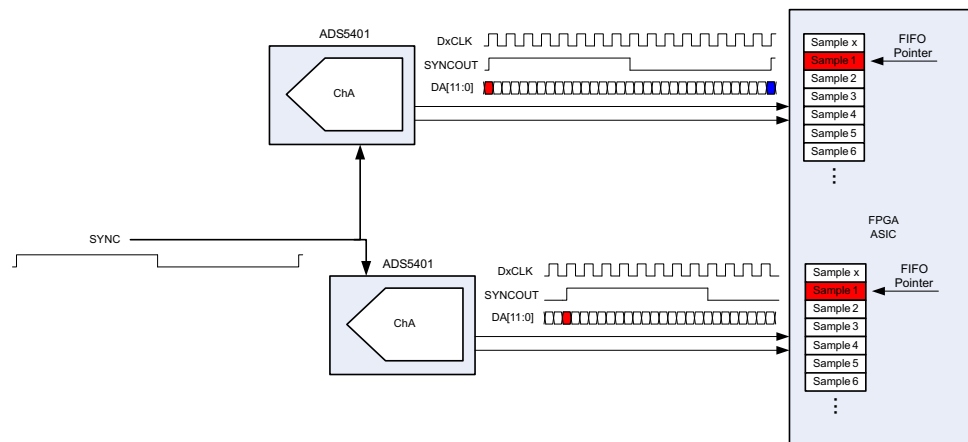


图 44. Multiple ADC Synchronization

The SYNC input signal should be a one time pulse to trigger the periodic 5-bit counter for SYNCOUT or a periodic signal repeating every 32 CLKIN clock cycles. It gets registered on the rising edge of the ADC input clock (CLKIN). Upon registering the initial rising edge of the SYNC signal, the internal clocks and logic get reset which results in invalid output data for 36 samples (1 complete sync cycle and 4 additional samples). The SYNCOUT signal starts with the next output clock (DACLK) rising edge and operates on a 5-bit counter. If a SYNCIN rising edge gets registered at a new position, the counter gets reset and SYNCOUT starts from the new position.

Because the ADS5401 output interface operates with a DDR clock, the synchronization can happen on the rising edge or falling edge sample. Synchronization on the falling edge sample will result in a half cycle clock stretch of DACLK. For convenience the SYNCOUT signal is available on the ChA output LVDS bus. When using decimation the SYNCOUT signal still operates on 32 clock cycles of CLKIN but since the output data is decimated by 2, only the first 18 samples should be discarded.

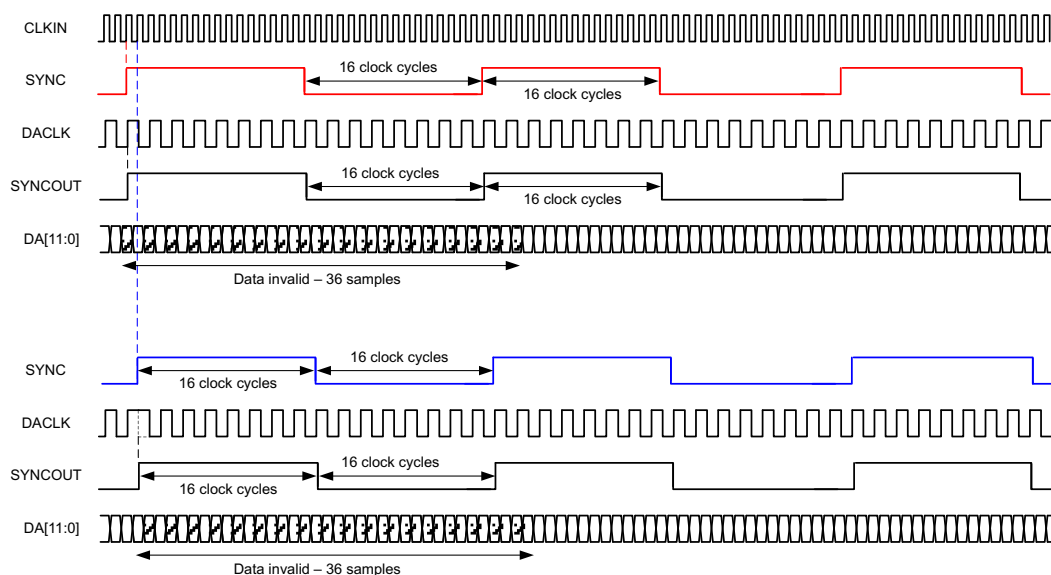


图 45. Multiple Device Synchronization Timing Diagram

8.4 Device Functional Modes

The ADS5401 has two main functional modes. The ADC can operate in Bypass mode in which sample rate and data-rate is the same or it can be programmed to operate in Decimate by 2x mode in which data rate is half of the sampling rate.

8.4.1 Power-Down Modes

The ADS5401 can be configured through SPI write (address x37) to a standby, light or deep sleep power mode which is controlled by the ENABLE pin. The sleep modes are active when the ENABLE pin goes low. Different internal functions stay powered up which results in different power consumption and wake up time between the two sleep modes.

表 3. Power-Down Modes

SLEEP MODE	WAKE-UP TIME	POWER CONSUMPTION AUTO CORRECTION DISABLED	POWER CONSUMPTION AUTO CORRECTION ENABLED
Complete Shut Down	2.5 ms	7mW	7mW
Stand-by	100μs	7mW	7mW
Deep Sleep	20μs	465mW	530mW
Light Sleep	2μs	295mW	360mW

8.5 Programming

The serial interface (SIF) included in the ADS5401 is a simple 3 or 4 pin interface. In normal mode, 3 pins are used to communicate with the device. There is an enable (SDENB), a clock (SCLK) and a bidirectional IO port (SDIO). If the user would like to use the 4 pin interface one write must be implemented in the 3 pin mode to enable 4 pin communications. In this mode, the SDO pin becomes the dedicated output. The serial interface has an 8-bit address word and a 16-bit data word. The first rising edge of SCLK after SDENB goes low will latch the read/write bit. If a high is registered then a read is requested, if it is low then a write is requested. SDENB must be brought high again before another transfer can be requested. The signal diagram is shown below:

8.5.1 Device Initialization

After power up, TI recommends using the device through a hardware reset by applying a logic low pulse on the SRESETb pin (of width greater than 20ns), as shown in [图 2](#). This resets all internal digital blocks (including SPI registers) to their default condition.

Recommended Device Initialization Sequence:

1. Power up
2. Reset ADS5401 using hardware reset.
3. Apply clock and input signal.
4. Set register 0x01 bit D15 to 1 (ChA Corr EN) to enable gain/offset correction circuit and other desired registers.
5. Set register 0x03 bit D14 to 1 (Start Auto Corr ChA). This clears and resets the accumulator values in the DC and gain correction loop.
6. Set register 0x03 bit D14 to 0 (Start Auto Corr ChA). This starts the DC and gain auto-correction loop.

8.5.2 Serial Register Write

The internal register of the ADS5401 can be programmed following these steps:

1. Drive SDENB pin low
2. Set the R/W bit to 0 (bit A7 of the 8 bit address)
3. Initiate a serial interface cycle specifying the address of the register (A6 to A0) whose content has to be written
4. Write 16bit data which is latched on the rising edge of SCLK

Programming (接下页)

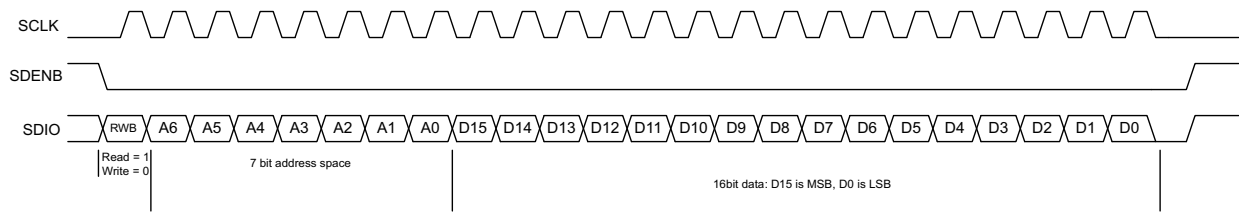


图 46. Serial Register Write Timing Diagram

8.5.3 Serial Register Readout

The device includes a mode where the contents of the internal registers can be read back using the SDO/SDIO pins. This read-back mode may be useful as a diagnostic check to verify the serial interface communication between the external controller and the ADC.

1. Drive SDENB pin low
2. Set the RW bit (A7) to 1. This setting disables any further writes to the registers
3. Initiate a serial interface cycle specifying the address of the register (A6 to A0) whose content has to be read.
4. The device outputs the contents (D15 to D0) of the selected register on the SDO/SDIO pin
5. The external controller can latch the contents at the SCLK rising edge.
6. To enable register writes, reset the RW register bit to 0.

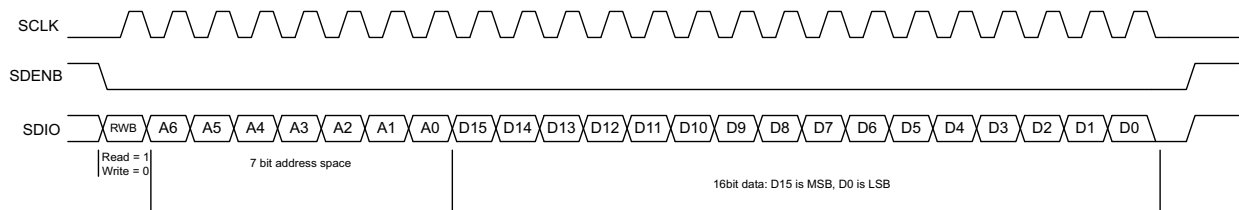


图 47. Serial Register Read Timing Diagram

8.6 Register Maps

表 4. Serial Register Map⁽¹⁾

Register Address	Register Data															
A7–A0 IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
0	3- / 4-wire SPI	Decima- tion Filter EN	0	ChA High/ Lowpass	0	0	0	0	0	0	0	0	0	0	0	0
1	ChA Corr EN	0	0	0	0	0	0	0	0	0	0	0	Data Format	0	Hp Mode1	0
2	0	0	0	0	0	Overrange threshold				0	0	0	0	0	0	0
3	0	Start Auto Corr ChA	0	0	1	0	1	1	0	0	0	1	1	0	0	0
E	Sync Select														0	0
F	Sync Select				0	0	0	0	0	VREF Set			0	0	0	0
2B	0	0	0	0	0	0	0	Temp Sensor								
2C	Reset															
37	Sleep Modes						0	0	0	0	0	0	0	0	0	0
38	HP Mode2									BIAS EN	SYNC EN	LP Mode 1	1	1	1	1
3A	LVDS Current Strength			LVDS SW		Internal LVDS Termination		0	0	0	0	DACLK EN	LP Mode 2	0	OVRA EN	LP Mode 3
66	LVDS Output Bus A EN															

(1) Multiple functions in a register can be programmed in a single write operation.

ADS5401

ZHCSAV9B – APRIL 2013 – REVISED JANUARY 2016

www.ti.com.cn
8.6.1 Register Name: Config0 - Address: 0×00, Default = 0×00
图 48. Register Config0 Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
0	3-/4-wire SPI	Decimation Filter EN	0	ChA High/Low Pass	0	0	0	0	0	0	0	0	0	0	0	0

- D15 3-/4-Wire SPI** Enables 4-bit serial interface when set
Default 0
- 0 3-wire SPI is used with SDIO pin operating as bidirectional I/O port
- 1 4-wire SPI is used with SDIO pin operating as data input and SDO pin as data output port.
- D14 Decimation Filter EN** 2x decimation filter is enabled when bit is set
Default 0
- 0 Normal operation with data output at full sampling rate
- 1 2x decimation filter enabled
- D12 ChA Highpass or Lowpass** (Decimation filter must be enabled first: set bit D14)
Default 0
- 0 Lowpass
- 1 Highpass

8.6.2 Register Name: Config1 - Address: 0×01, Default = 0×00

图 49. Register Config1 Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
1	ChA Corr EN	0	0	0	0	0	0	0	0	0	0	0	Data Format	0	HP Mode1	0

D15 **ChA Corr EN (should be enabled for maximum performance)**

Default 0

0 Auto correction disabled

1 Auto correction enabled

D3 **Data Format**

Default 0

0 Two's complement

1 Offset Binary

D2 **SYNCOUT Enable**

Default 0

1 Must be set to 1 to enable SYNCOUT signal

D1 **HP Mode 1**

Default 0

1 Must be set to 1 for optimum performance

8.6.3 Register Name: Config2 - Address: 0x02, Default = 0x780

图 50. Register Config2 Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
2	0	0	0	0	0	Over-range threshold				0	0	0	0	0	0	0

D10-D7 Over-range threshold The over-range detection is triggered 12 output clock cycles after the overload condition occurs. The threshold at which the OVR is triggered = $1.0V \times [\text{decimal value of } \langle \text{Over-range threshold} \rangle] / 16$. After power up or reset, the default value is 15 (decimal) which corresponds to a OVR threshold of 0.56dB below fullscale ($20 \times \log(15/16)$). This OVR threshold is applicable to both channels.

Default 1111

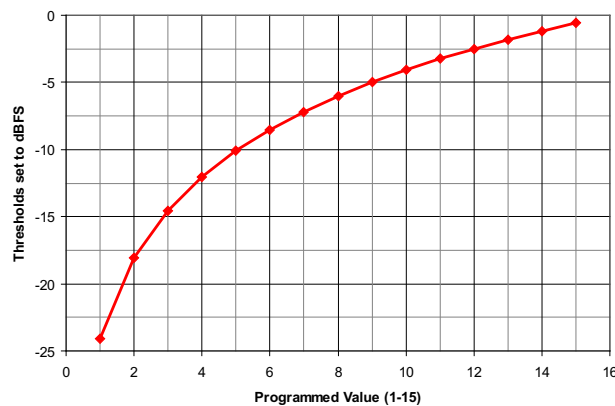


图 51. OVR Detection Threshold

8.6.4 Register Name: 3 - Address: 0x03

图 52. Register 3 Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
3	0	Start Auto Corr ChA	0	0	1	0	1	1	0	0	0	1	1	0	0	0

- D14 **Start Auto Corr ChA** Starts DC offset and Gain correction loop for ChA
Default 1
- 0 Starts the DC offset and Gain correction loops
- 1 Clears DC offset correction value to 0 and Gain correction value to 1
- D11, 9, 8, 4, 3 Must be set to 1 for maximum performance
Default 1

8.6.5 Register Name: E - Address: 0x0E

图 53. Register E Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
E	Sync Select														0	0

- D15-D2 **Sync Select** Sync selection for the clock generator block (also
Default 1010 1010 need to see address 0x0F)
1010 10
- 0000 0000 0000 00 Sync is disabled
- 0101 0101 0101 01 Sync is set to one shot (one time synchronization only)
- 1010 1010 1010 10 Sync is derived from SYNC input pins
- 1111 1111 1111 11 not supported

ADS5401

ZHCSAV9B – APRIL 2013 – REVISED JANUARY 2016

www.ti.com.cn
8.6.6 Register Name: F - Address: 0x0F
图 54. Register F Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
F	Sync Select				0	0	0	0	0	VREF Sel			0	0	0	0

D15-D12 **Sync Select** Sync selection for the clock generator block
Default 1010

0000 Sync is disabled

0101 Sync is set to one shot (one time synchronization only)

1010 Sync is derived from SYNC input pins

1111 not supported

D6-D4 **VREF SEL** Internal voltage reference selection
Default 000

000 1.0V

001 1.25V

010 0.9V

011 0.8V

100 1.15V

Others external reference

8.6.7 Register Name: 2B - Address: 0x2B
图 55. Register 2B Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
2B	0	0	0	0	0	0	0	Temp Sensor								

D8-D0 **Temp Sensor** Internal temperature sensor value – read only

8.6.8 Register Name: 2C - Address: 0x2C
图 56. Register 2C Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
2C	Reset															

D15-D0 **Reset** This is a software reset to reset all SPI registers to their default value. Self
Default clears to 0.
0000

1101001011110000 Perform software reset

8.6.9 Register Name: 37 - Address: 0x37

图 57. Register 37 Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
37	Sleep Modes						0	0	0	0	0	0	0	0	0	0

D15-D10	Sleep Modes Default 00	Sleep mode selection which is controlled by the ENABLE pin. Sleep modes are active when ENABLE pin goes low.
000000	Complete shut down	Wake up time 2.5 ms
100000	Stand-by mode	Wake up time 100 μ s
110000	Deep sleep mode	Wake up time 20 μ s
110101	Light sleep mode	Wake up time 2 μ s

8.6.10 Register Name: 38 - Address: 0x38

图 58. Register 38 Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
38	HP Mode 2									Bias EN	SYNC EN	LP Mode 1	1	1	1	1

D15-D7	HP Mode 2 Default 11111111	
1	Set to 1 for normal operation	
D6	BIAS EN Default 1	Enables internal fuse bias voltages – can be disabled after power up to save power.
0	Internal bias powered down	
1	Internal bias enabled	
D5	SYNC EN Default 1	Enables the SYNC input buffer.
0	SYNC input buffer disabled	
1	SYNC input bffer enabled	
D4	LP Mode 1 Default 1	Low power mode 1 to disable internal unused input buffer.
0	Internal input buffer disabled	
1	Internal input buffer enabled	
D3-D0	Reads back 1	

ADS5401

ZHCSAV9B – APRIL 2013 – REVISED JANUARY 2016

www.ti.com.cn
8.6.11 Register Name: 3A - Address: 0x3A
图 59. Register 3A Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
3A	LVDS Current Strength			LVDS SW		Internal LVDS Termination		0	0	0	0	DACLK EN	LP Mode 2	0	OVRA EN	LP Mode 3

D15-D13	LVDS Current Strength	LVDS output current strength.		
	Default 000			
000	2 mA	100	3 mA	
001	2.25 mA	101	3.25 mA	
010	2.5 mA	110	3.5 mA	
011	2.75 mA	111	3.75 mA	
D12-D11	LVDS SW	LVDS driver internal switch setting – correct range must be set for setting in D15-D13		
	Default 01			
01	2 mA to 2.75 mA			
11	3mA to 3.75mA			
D10-D9	Internal LVDS Termination	Internal termination		
	Default 00			
00	2 kΩ			
01	200 Ω			
10	200 Ω			
11	100 Ω			
D4	DACLK EN	Enable DACLK output buffer		
	Default 1			
0	DACLK output buffer powered down			
1	DACLK output buffer enabled			
D3	LP Mode 2	Low power mode to disable unused internal output buffer		
	Default 1			
0	Internal output buffer disabled			
1	internal output buffer enabled			
D1	OVRA EN	Enable OVRA output buffer		
	Default 1			
0	OVRA output buffer powered down			
1	OVRA output buffer enabled			
D0	LP Mode 3	Low power mode to disable unused internal output buffer		
	Default 1			
0	Internal output buffer disabled			
1	Internal output buffer enabled			

8.6.12 Register Name: 66 - Address: 0x66

图 60. Register 66 Format

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
66	LVDS Output Bus A EN															

D15-D0	LVDS Output Bus A EN	Individual LVDS output pin power down for channel A
	Default FFFF	
0	Output is powered down	
1	Output is enabled	
D15	Pins N7, P7 (no connect pins) which are not used and should be powered down for power savings	
D14	Pins N6, P6 (no connect pins) which are not used and should be powered down for power savings	
D13	SYNCOUPTP/N (pins P9, N9)	
D12	Pins P4, N4 (no connect pins) which are not used and should be powered down for power savings	
D11-D0	corresponds to DA11-DA0	

9 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

In the design of any application involving a high-speed data converter, particular attention should be paid to the design of the analog input, the clocking solution, and careful layout of the clock and analog signals. The ADS5401 evaluation module (EVM) is one practical example of the design of the analog input circuit and clocking solution, as well as a practical example of good circuit board layout practices around the ADC.

9.2 Typical Application

The analog inputs of the ADS5401 must be fully differential and biased to a desired common-mode voltage, VCM. Therefore, there will be a signal conditioning circuit for the analog input. If the amplitude of the input circuit is such that no gain is needed to make full use of the full-scale range of the ADC, then a transformer coupled circuit as in 图 61 may be used with good results. The transformer coupling is inherently low-noise, and inherently AC-coupled so that the signal may be biased to VCM after the transformer coupling.

By using the simple drive circuit of 图 61, uniform performance can be obtained over a wide frequency range. The buffers present at the analog inputs of the device help isolate the external drive source from the switching currents of the sampling circuit.

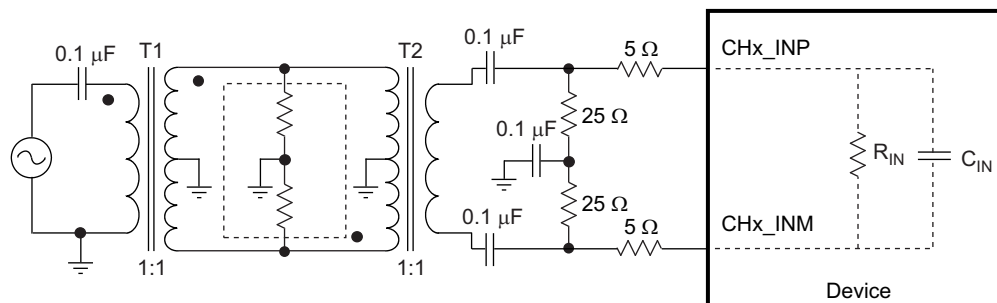


图 61. Input Drive Circuit

If signal gain is required, or the input bandwidth is to include the spectrum all the way down to DC such that AC coupling is not possible, then an amplifier-based signal conditioning circuit would be required. The figure below shows LMH3401 interfaced with ADS5401. LMH3401 is configured to have to Single-Ended input with a differential outputs follow by 1st Nyquist based low pass filter with 375MHz bandwidth. Power supply recommendations for the amplifier are also shown in 图 62.

Typical Application (接下页)

$$\text{SNR}_{\text{ADC}}[\text{dBc}] = -20 \times \log \sqrt{\left(10 - \frac{\text{SNR}_{\text{Quantization_Noise}}}{20}\right)^2 + \left(10 - \frac{\text{SNR}_{\text{ThermalNoise}}}{20}\right)^2 + \left(10 - \frac{\text{SNR}_{\text{Jitter}}}{20}\right)^2} \quad (1)$$

The SNR limitation due to sample clock jitter can be calculated as following:

$$\text{SNR}_{\text{Jitter}}[\text{dBc}] = -20 \times \log(2\pi \times f_{\text{IN}} \times t_{\text{Jitter}}) \quad (2)$$

The total clock jitter (TJitter) has three components – the internal aperture jitter (100fs for ADS5401) which is set by the noise of the clock input buffer, the external clock jitter and the jitter from the analog input signal. It can be calculated as following:

$$T_{\text{Jitter}} = \sqrt{(T_{\text{Jitter,Ext.Clock_Input}})^2 + (T_{\text{Aperture_ADC}})^2} \quad (3)$$

External clock jitter can be minimized by using high quality clock sources and jitter cleaners as well as bandpass filters at the clock input while a faster clock slew rate improves the ADC aperture jitter.

The ADS5401 has a thermal noise of 61.7 dBFS and internal aperture jitter of 100 fs. The SNR depending on amount of external jitter for different input frequencies is shown in [图 64](#).

For the clock input, [图 64](#) shows the SNR of the device above 100 MHz begins to degrade with external clock jitter of greater than 100 fs rms, so TI recommends the clock source be limited to approximately 100 fs of rms jitter.

9.2.2.2 Amplifier Selection

The amplifier should be selected to preserve the systems SNR performance of (61 dBFS). The SNR of the system can be calculated from [公式 4](#).

$$\text{SNR}_{\text{System}} = -20 \times \log \sqrt{\left(10 - \frac{-\text{SNR}_{\text{ADC}}}{20}\right)^2 + \left(10 - \frac{-\text{SNR}_{\text{AMP+Filter}}}{20}\right)^2} \quad (4)$$

The signal-to-noise ratio (SNR) of the amplifier and filter can be calculated from the amplitude of the signal and the bandwidth of the filter. The noise from the amplifier is band-limited by the filter with the equivalent brick-wall filter bandwidth. The amplifier and filter noise can be calculated using [公式 5](#).

$$\text{SNR}_{\text{AMP+Filter}} = 10 \times \log \left(\frac{V_O^2}{E_{\text{FILTEROUT}}^2} \right) = 20 \times \log \left(\frac{V_O}{E_{\text{FILTEROUT}}} \right)$$

Where

- $E_{\text{FILTEROUT}} = E_{\text{NAMPOUT}} \times \sqrt{\text{ENB}}$
 - E_{NAMPOUT} = the output noise density of the LMH3401 (3.4 nV/√Hz)
 - ENB = the brick-wall equivalent noise bandwidth of the filter
 - V_O = the amplifier output signal
- (5)

In this design we are using a 3rd order lowpass filter with 375MHz bandwidth, which gives brick-wall equivalent noise bandwidth of 431.25 MHz. Using the output noise density of LMH3401 and brick-wall equivalent bandwidth of the filter, EFILTEROUT can be calculated, equal to be 70.6 μVRMS. Substituting the values of EFILTEROUT and VO in [公式 4](#), SNRAMP+Filter equals 73.45 dBFS which is within our design requirements

Typical Application (接下页)

9.2.3 Application Curve

图 64 shows the SNR vs input frequency and external clock signal; it can be used to estimate how much jitter on the clock signal is acceptable at a given input frequency to obtain specific SNR performance from the ADC.

表 5. System SNR Based on ADC and Amplifier's SNR Calculations

SNR _{SYSTEM}	SNR _{ADC}	SNR _{AMP + FILTER}
57.7 dBFS	61.7 dBFS	60 dBFS
60.0 dBFS	61.7 dBFS	65 dBFS
61.1 dBFS	61.7 dBFS	70 dBFS
61.5 dBFS	61.7 dBFS	75 dBFS
61.6 dBFS	61.7 dBFS	80 dBFS

As seen in 表 5, to meet the design requirements and to have system SNR of 61 dBFS, the SNR_{AMP + Filter} should be greater than 70 dB. 表 5 can be used to design the amplifier and filter stage of the ADC. The SNR of amplifier and filter should be greater than 70 dB to get the 61dBFS SNR for the system.

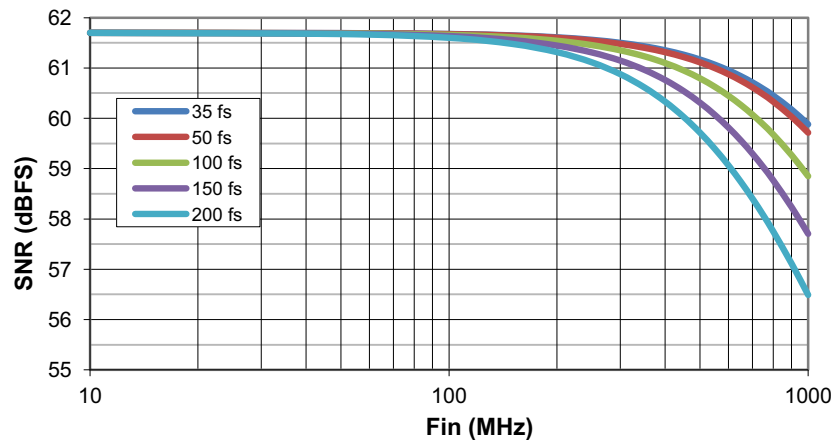


图 64. SNR vs Input Frequency and External Clock Jitter

10 Power Supply Recommendations

The device requires a 1.8-V nominal supply for AVDDC, AVDD18, IOVDD, DVDDLVD, and DVDD. The device also requires a 3.3-V supply for AVDD33. There are no specific sequence power-supply requirements during device power-up. AVDD, DVDD, IOVDD, DVDDLVD, AVDD18 and AVDD33 can power up in any order.

11 Layout

11.1 Layout Guidelines

The Device EVM layout can be used as a reference layout to obtain the best performance. A layout diagram of the EVM top layer is provided in [Figure 65](#). Some important points to remember during laying out the board are:

- Analog input is located on opposite sides of the device pinout to ensure minimum crosstalk on the package level. To minimize crosstalk on-board, the analog input should exit the pinout in opposite directions, as shown in the reference layout of [Figure 65](#) as much as possible.
- Digital outputs should be kept away from the analog inputs. When these digital outputs exit the pinout, the digital output traces should not be kept parallel to the analog input traces because this configuration may result in coupling from digital outputs to analog inputs and degrade performance.
- At each power-supply pin, a 0.1- μ F decoupling capacitor should be kept close to the device. A separate decoupling capacitor group consisting of a parallel combination of 10- μ F, 1- μ F, and 0.1- μ F capacitors can be kept close to the supply source.
- In the device pinout, the sampling clock is located on a side perpendicular to the analog inputs in order to minimize coupling between them. This configuration is also maintained on the reference layout of [Figure 66](#) as much as possible.

11.2 Layout Example

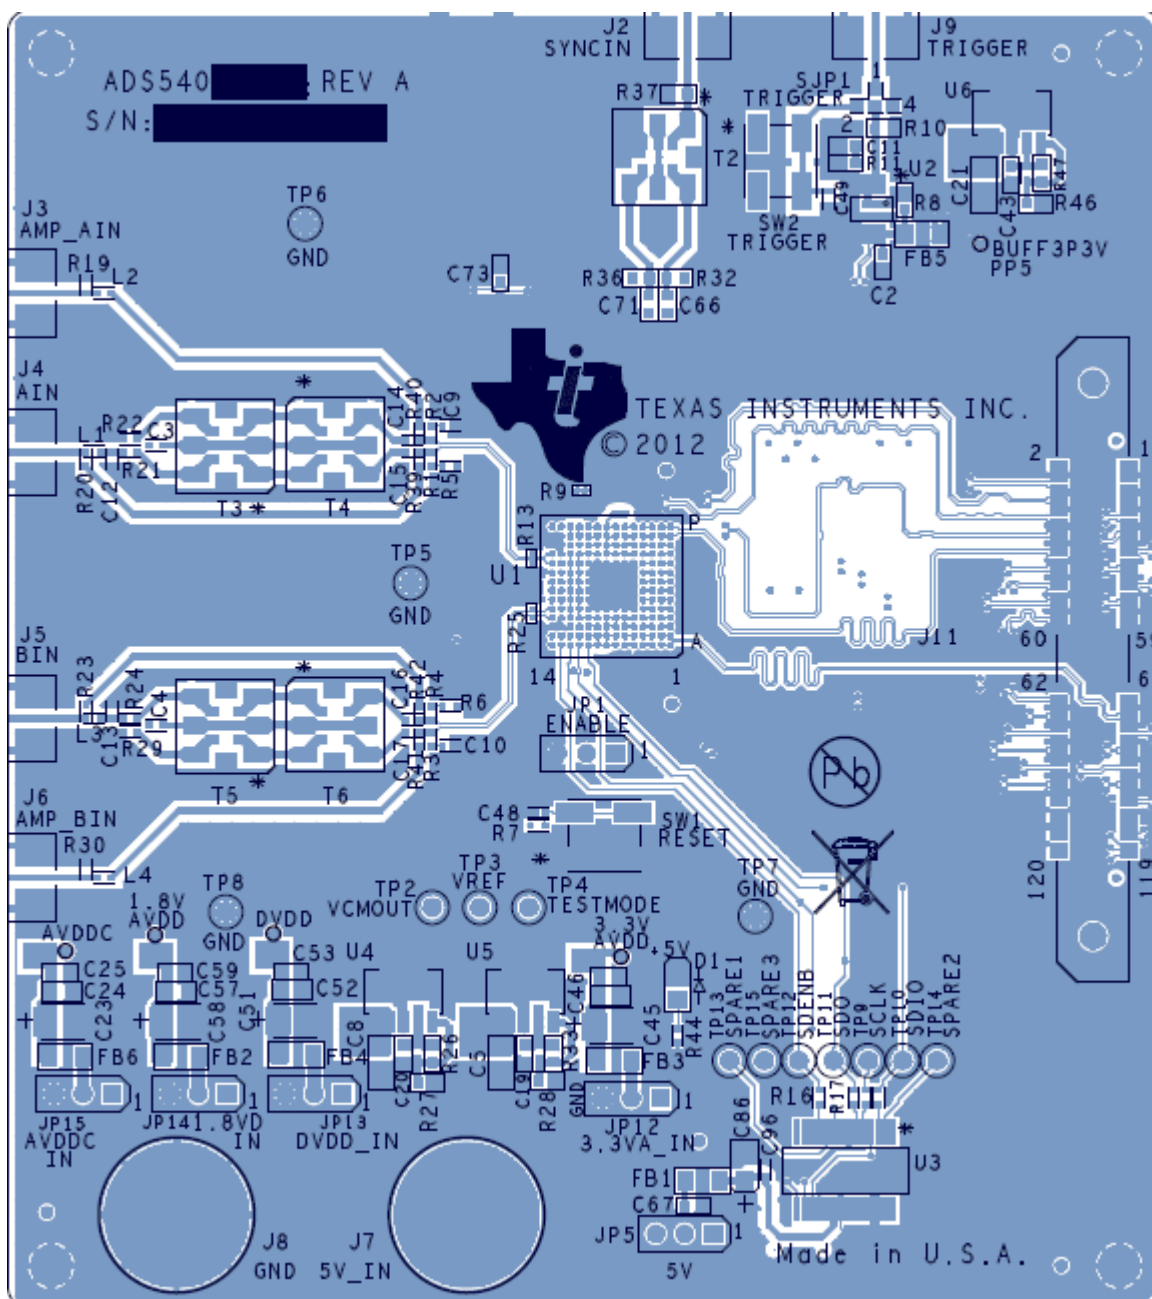


图 65. Top Layer

Layout Example (接下页)

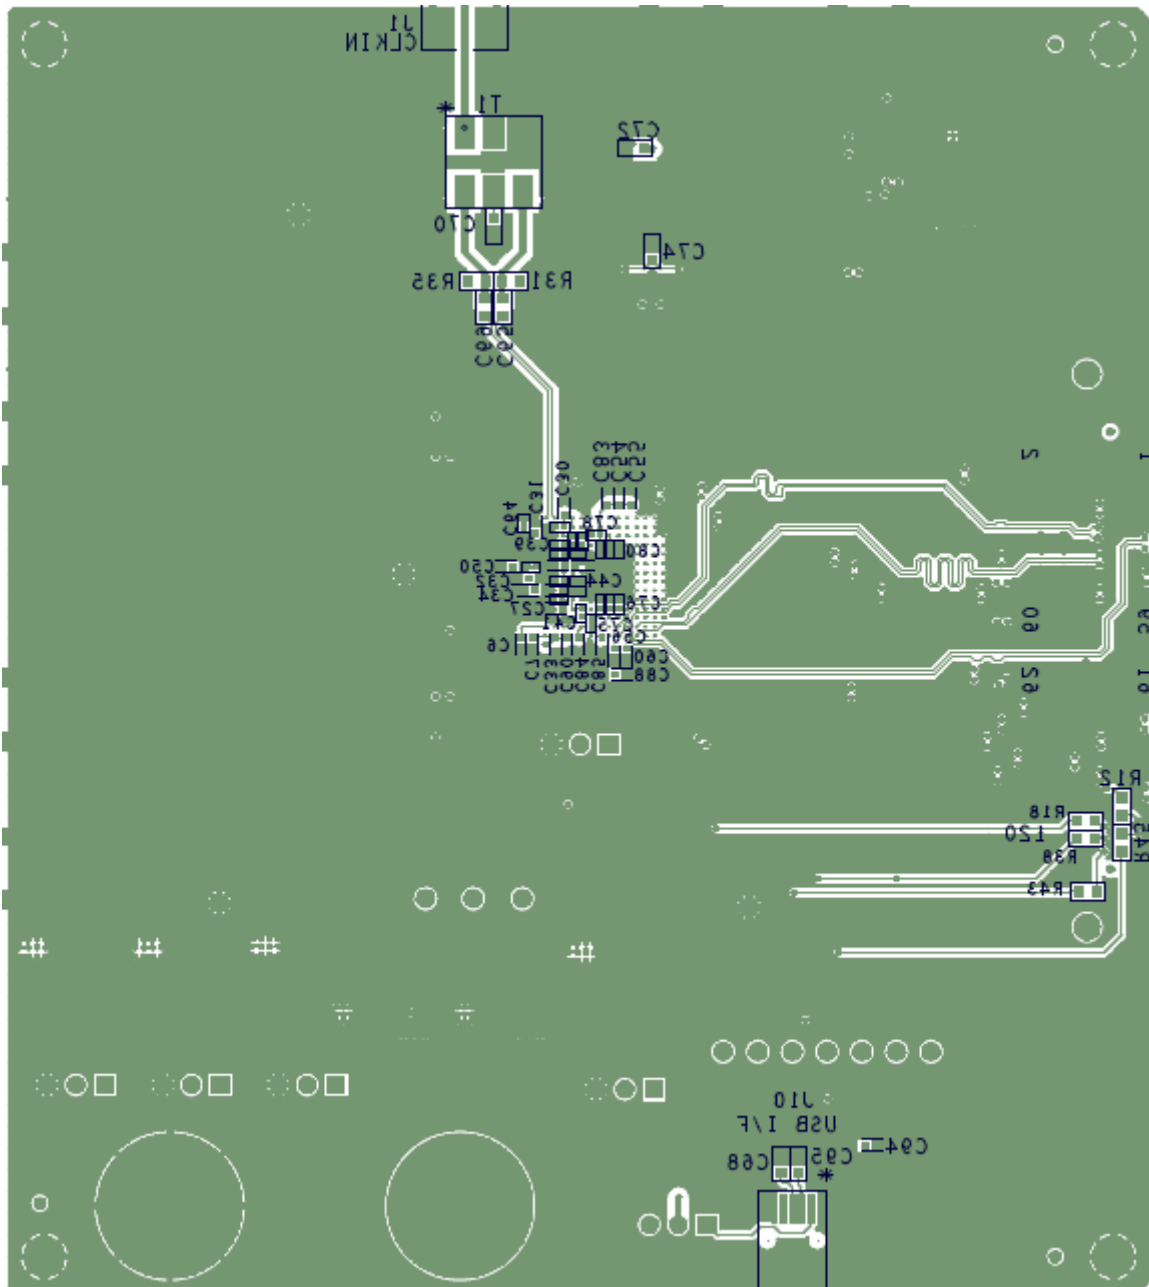


图 66. Bottom Layer

12 器件和文档支持

12.1 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.2 商标

E2E is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

12.3 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

12.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。要获得这份数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com.cn/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2016, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
ADS5401IZAY	ACTIVE	NFBGA	ZAY	196	160	RoHS & Green	SNAGCU	Level-3-260C-168 HR	-40 to 85	ADS5401I	Samples
ADS5401IZAYR	ACTIVE	NFBGA	ZAY	196	1000	RoHS & Green	SNAGCU	Level-3-260C-168 HR	-40 to 85	ADS5401I	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.



⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

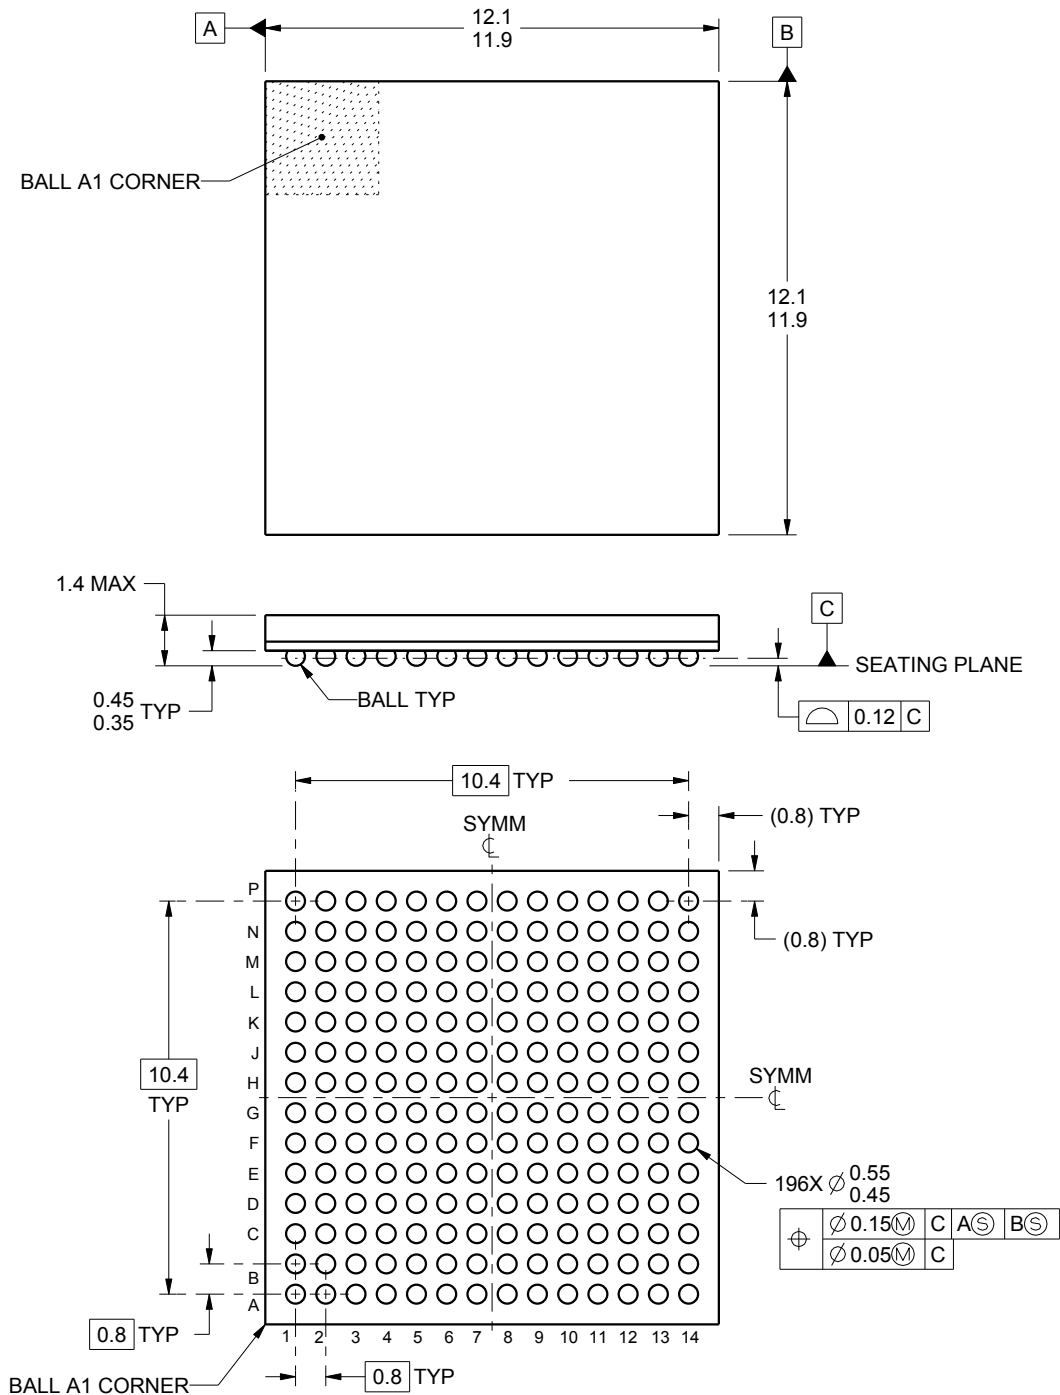

4219823/A 09/2015

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


ZAY0196A

NFBGA - 1.4 mm max height

PLASTIC BALL GRID ARRAY

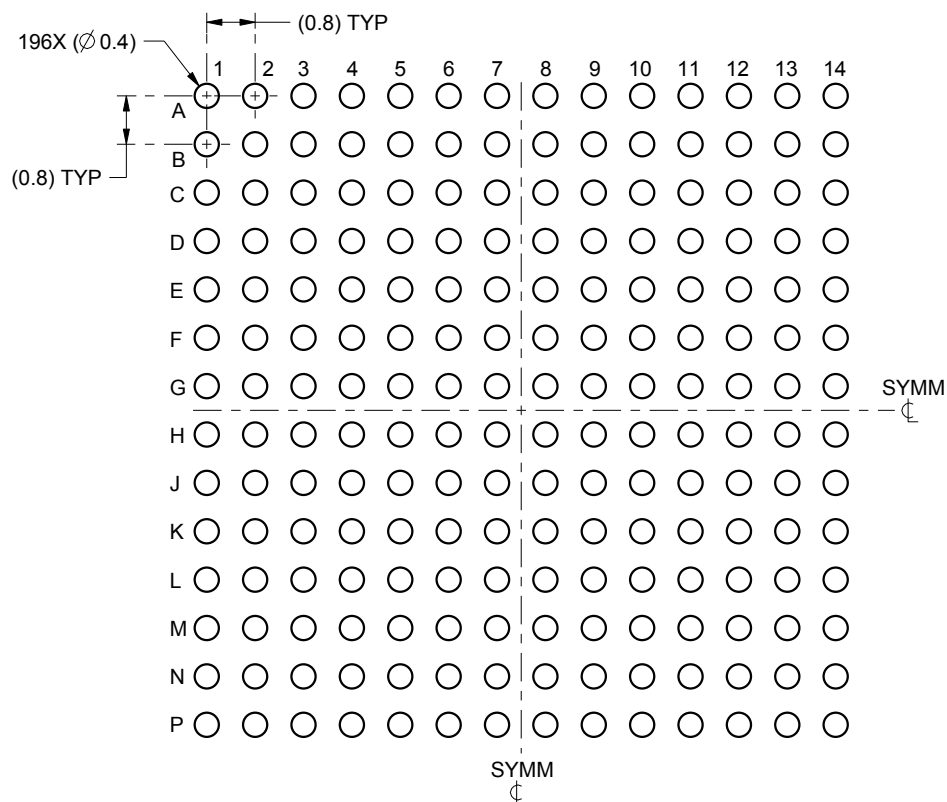

LAND PATTERN EXAMPLE
SCALE:8X

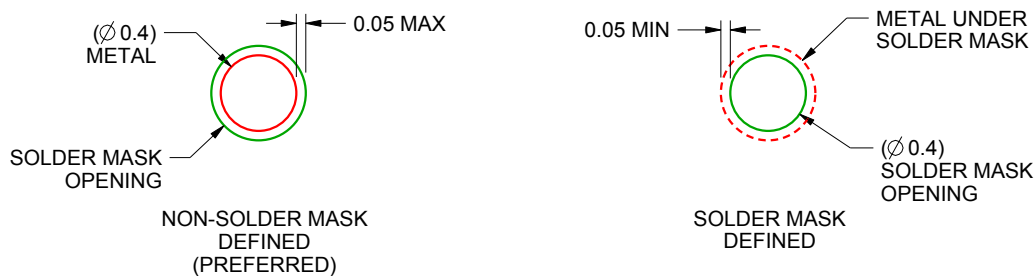

SOLDER MASK DETAILS
NOT TO SCALE

4219823/A 09/2015

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For information, see Texas Instruments literature number SPRAA99 (www.ti.com/lit/spraa99).

EXAMPLE STENCIL DESIGN

ZAY0196A

NFBGA - 1.4 mm max height

PLASTIC BALL GRID ARRAY

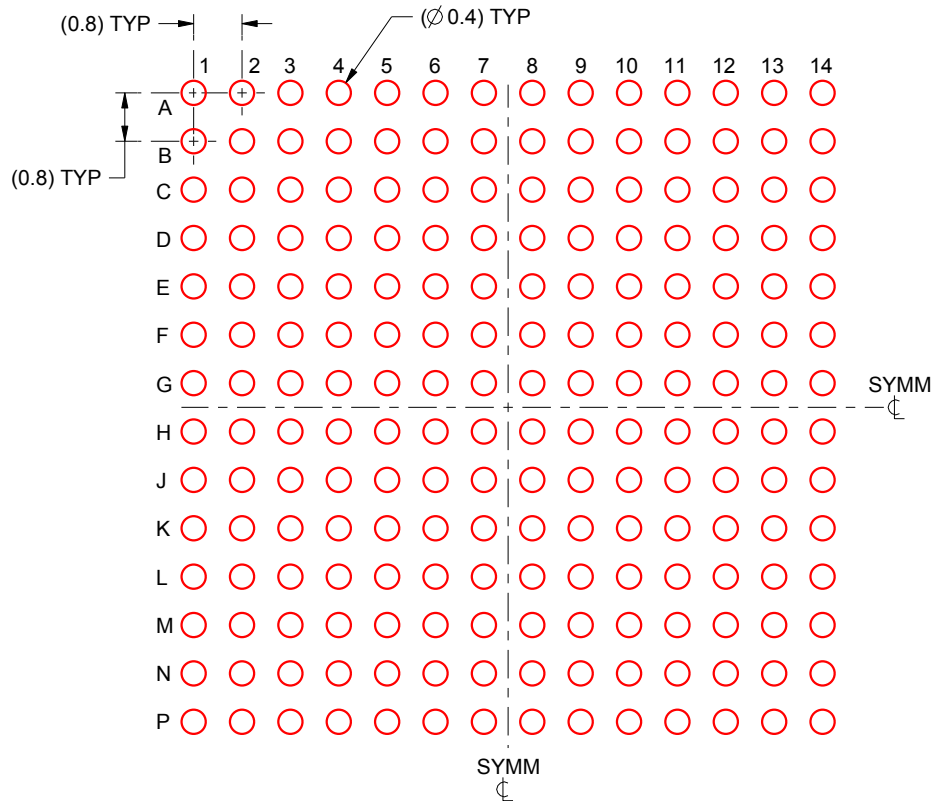

SOLDER PASTE EXAMPLE
BASED ON 0.15 mm THICK STENCIL
SCALE:8X

4219823/A 09/2015

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司