

TS5A3159-Q1 1Ω SPDT 模拟开关

1 特性

- 适用于汽车电子 应用
- 具有符合 AEC-Q100 的下列结果：
 - 器件温度 1 级：-40℃ 至 +125℃ 的环境运行温度范围
 - 器件人体模型 (HBM) 静电放电 (ESD) 分类等级 2
 - 器件组件充电模式 (CDM) ESD 分类等级 C4B
- 额定的先断后合开关
- 低导通状态电阻 (1Ω)
- 控制输入可承受 5V 电压
- 低电荷注入
- 出色的导通电阻匹配
- 低总谐波失真
- 1.65V 至 5.5V 单电源运行

2 应用范围

- 汽车信息娱乐和仪表板
- 车身电子装置和照明

3 说明


TS5A3159-Q1是一款单刀双掷 (SPDT) 模拟开关，工作电压范围设计为 1.65V 至 5.5V。该器件具有低导通状态电阻和出色的通道间导通状态电阻匹配，其先断后合的特性可防止信号在路径间传输时出现失真。此器件具有出色的总谐波失真 (THD) 性能并且能耗极低。这些功能使得这款器件适合于便携式音频 应用。

器件信息⁽¹⁾

器件型号	封装	封装尺寸（标称值）
TS5A3159-Q1	SOT-23 (6)	2.90mm x 4.00mm

(1) 如需了解所有可用封装，请参见数据表末尾的可订购产品附录。

选择器应用

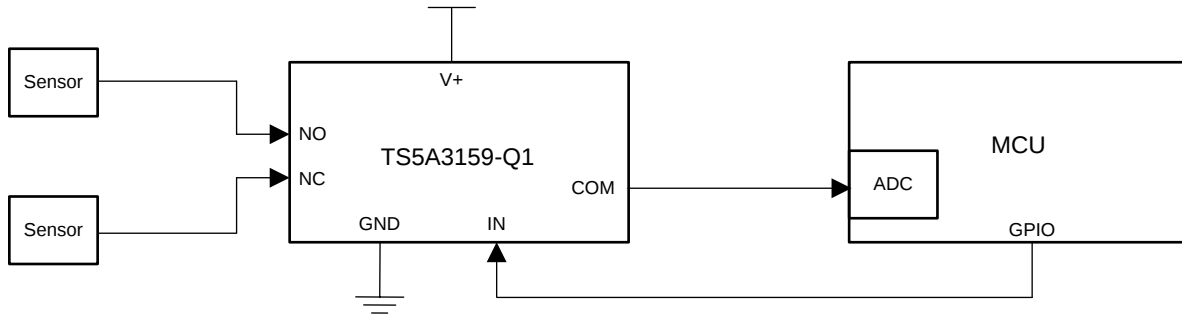

目录

1	特性	1	8.2	Functional Block Diagram	17
2	应用范围	1	8.3	Feature Description	17
3	说明	1	8.4	Device Functional Modes	17
4	修订历史记录	2	9	Applications and Implementation	18
5	Pin Configuration and Functions	4	9.1	Application Information	18
6	Specifications	4	9.2	Typical Application	18
6.1	Absolute Maximum Ratings	4	10	Power Supply Recommendations	19
6.2	ESD Ratings	4	11	Layout	19
6.3	Recommended Operating Conditions	5	11.1	Layout Guidelines	19
6.4	Thermal Information	5	11.2	Layout Example	19
6.5	Electrical Characteristics for 5-V Supply	5	12	器件和文档支持	20
6.6	Electrical Characteristics for 3.3-V Supply	6	12.1	文档支持	20
6.7	Electrical Characteristics For 2.5-V Supply	8	12.2	接收文档更新通知	20
6.8	Electrical Characteristics For 1.8-V Supply	9	12.3	社区资源	20
6.9	Typical Characteristics	10	12.4	商标	20
7	Parameter Measurement Information	12	12.5	静电放电警告	20
8	Detailed Description	17	12.6	Glossary	20
8.1	Overview	17	13	机械、封装和可订购信息	20

4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。


Changes from Revision B (October 2015) to Revision C	Page
• Changed I/O for V_{+} from I to —	4
• Added V_{COM} to Analog voltage, Analog port diode current, and ON-state switch current	4
• Added Junction temperature, T_J to <i>Absolute Maximum Ratings</i>	4
• Changed MIN value for V_{+} from 1.8 to 1.65 and MAX value from 5 to 5.5	5
• Changed MAX value for I_N from 5 to 5.5	5
• Changed MAX value for I_{NO} , I_{NC} , I_{COM} from 5 to V_{+}	5
• Added V_{IL} MAX value 0.6 and deleted TYP value 0.6	7
• 已添加 接收文档更新通知部分	20

Changes from Revision A (December 2012) to Revision B	Page
• Added ESD Ratings table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section	4

Changes from Original (November, 2012) to Revision A	Page
• 器件从预览变为生产	1
• Changed r_{ON} max values from 1.1 to 1.3	5
• Changed $I_{NC(OFF)}$, $I_{NO(OFF)}$ min and max values for 25°C from –2 and 2 to –6 and 6, respectively. Changed min and max values for Full from –20 and 20 to –150 and 150, respectively	5
• Changed $I_{NC(ON)}$, $I_{NO(ON)}$ min and max values for 25°C from –4 and 4 to –6 and 6, respectively. Changed min and max values for Full from –40 and 40 to –150 and 150, respectively	5
• Changed $I_{COM(ON)}$ min and max values for 25°C from –4 and 4 to –8 and 8, respectively. Changed min and max values for Full from –40 and 40 to –150 and 150, respectively.	5
• Inserted 25°C above Full in T_A column and inserted 0.5 μA max value for I_{+}	6

• Changed max values for r_{peak} from 2.1 to 2.2.....	6
• Changed max values for r_{on} from 1.5 to 1.8.	6
• Added 25°C to T_A column and added 0.5 max value to I_+	7
• Changed r_{peak} max values from 2.7 to 2.9.....	8
• Changed r_{on} max values from 2 to 2.3.	8
• Added 25°C to T_A column and added 0.5 max value to I_+	8
• Changed r_{peak} max values from 4.9 to 5.2.....	9
• Changed r_{on} max values from 3.2 to 3.5.	9
• Added 25°C to T_A column and added 0.5 max value to I_+	9
• Changed ON-state resistance from 1.1 to 1.3 Ω	17
• Changd leakage current from ± 20 nA to ± 6 nA.....	17

5 Pin Configuration and Functions

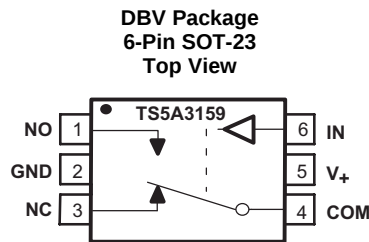

Pin Functions

PIN		I/O	DESCRIPTION
NO.	NAME		
1	NO	I/O	Normally-open terminal
2	GND	—	Digital ground
3	NC	I/O	Normally-closed terminal
4	COM	I/O	Common terminal
5	V ₊	—	Power supply
6	IN	I	Digital control pin to connect COM terminal to NO or NC terminals

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

			MIN	MAX	UNIT
V ₊	Supply voltage ⁽²⁾		−0.5	6.5	V
V _{NO} , V _{NC} , V _{COM}	Analog voltage ⁽²⁾⁽³⁾⁽⁴⁾		−0.5	V ₊ + 0.5	V
I _{I/OK}	Analog port diode current	V _{NO} , V _{NC} , V _{COM} < 0 or V _{NO} , V _{NC} , V _{COM} > V ₊	±50		mA
I _{NO} , I _{NC} , I _{COM}	ON-state switch current	V _{NO} , V _{NC} , V _{COM} = 0 to V ₊	±200		mA
ON-state peak switch current ⁽⁵⁾			±400		mA
V _{IN}	Digital input voltage range ⁽²⁾⁽³⁾		−0.5	6.5	V
I _{IK}	Digital input clamp current	V _{IN} < 0	−50		mA
Continuous current through V ₊ or GND			±100		mA
T _J	Junction temperature		150		°C
T _{std}	Storage temperature		−65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground, unless otherwise specified.
- (3) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- (4) This value is limited to 5.5 V maximum.
- (5) Pulse at 1 ms duration < 10% duty cycle.

6.2 ESD Ratings

		VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 ⁽¹⁾	±2000
		Charged device model (CDM), per AEC Q100-011	±750
		Other pins	±500

- (1) AEC Q100-002 indicates HBM stressing is done in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
V+	1.65	5.5	V
IN	0	5.5	V
NO, NC, COM	0	V+	V

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TS5A3159-Q1	UNIT
		DBV (SOT-23)	
		6 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	192.9	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	133.3	°C/W
R _{θJB}	Junction-to-board thermal resistance	37.6	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	38.9	°C/W
Ψ _{JB}	Junction-to-board characterization parameter	37.1	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics for 5-V Supply

V₊ = 4.5 V to 5.5 V and T_A = –40°C to +125°C (unless otherwise noted)

PARAMETER	TEST CONDITIONS	T _A	V ₊	MIN	TYP ⁽¹⁾	MAX	UNIT
ANALOG SWITCH							
V _{COM} , V _{NO} , V _{NC}	Analog signal range			0		V ₊	V
r _{peak}	Peak ON resistance	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = –30 mA	Switch ON, See Figure 11	25°C		1	Ω
				Full	4.5 V	1.5	Ω
r _{on}	ON-state resistance	V _{NO} or V _{NC} = 2.5 V, I _{COM} = –30 mA	Switch ON, See Figure 10	25°C		0.75	Ω
				Full	4.5 V	1.3	Ω
Δr _{on}	ON-state resistance match between channels	V _{NO} or V _{NC} = 2.5 V, I _{COM} = –30 mA	Switch ON, See Figure 10	25°C		0.1	Ω
r _{on(flat)}	ON-state resistance flatness	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = –30 mA	Switch ON, See Figure 10	25°C		0.233	Ω
		V _{NO} or V _{NC} = 1 V, 1.5 V, 2.5 V, I _{COM} = –30 mA		25°C		0.15	Ω
I _{NC(OFF)} , I _{NO(OFF)}	NC, NO OFF leakage current	V _{NC} or V _{NO} = 4.5 V, V _{COM} = 0	Switch OFF, See Figure 12	25°C		–6	nA
				Full	5.5 V	150	nA
I _{NC(ON)} , I _{NO(ON)}	NC, NO ON leakage current	V _{NC} or V _{NO} = 4.5 V, V _{COM} = Open	Switch ON, See Figure 13	25°C		–6	nA
				Full	5.5 V	150	nA
I _{COM(ON)}	COM ON leakage current	V _{NC} or V _{NO} = 4.5 V or Open, V _{COM} = 4.5 V	Switch ON, See Figure 13	25°C		–8	nA
				Full	5.5 V	150	nA
DIGITAL INPUTS (IN)							
V _{IH}	Input logic high		Full			2.4	V
V _{IL}	Input logic low		Full			0	V
I _{IH} , I _{IL}	Input leakage current	V _{IN} = 5.5 V or 0	Full			–1	μA

(1) T_A = 25°C

Electrical Characteristics for 5-V Supply (continued)

 $V_+ = 4.5 \text{ V to } 5.5 \text{ V}$ and $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	V ₊	MIN	TYP ⁽¹⁾	MAX	UNIT
DYNAMIC									
t _{ON}	Turn-on time	V _{COM} = V ₊ , R _L = 50 Ω,	C _L = 35 pF, See Figure 15	25°C	4.5 V to 5.5 V	20		35	ns
				Full				40	
t _{OFF}	Turn-off time	V _{COM} = V ₊ , R _L = 50 Ω,	C _L = 35 pF, See Figure 15	25°C	4.5 V to 5.5 V	15		20	ns
				Full				35	
t _{BBM}	Break-before-make time	V _{NC} = V _{NO} = V ₊ / 2, R _L = 50 Ω,	C _L = 35 pF, See Figure 16	25°C	4.5 V to 5.5 V	1	12	14.5	ns
				Full		1			
Q _C	Charge injection	C _L = 1 nF, V _{GEN} = 0 V,	See Figure 19	25°C	5 V	36			pC
C _{NC(OFF)} , C _{NO(OFF)}	NC, NO OFF capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch OFF,	See Figure 13	25°C	5 V	23			pF
C _{NC(ON)} , C _{NO(ON)}	NC, NO ON capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch ON,	See Figure 13	25°C	5 V	84			pF
C _{COM(ON)}	COM ON capacitance	V _{COM} = V ₊ or GND, Switch ON,	See Figure 13	25°C	5 V	84			pF
C _{IN}	Digital input capacitance	V _{IN} = V ₊ or GND,	See Figure 13	25°C	5 V	2.1			pF
BW	Bandwidth	R _L = 50 Ω, Switch ON,	See Figure 16	25°C	5 V	100			MHz
O _{ISO}	OFF isolation	R _L = 50 Ω, f = 1 MHz,	Switch OFF, See Figure 17	25°C	5 V	−65			dB
X _{TALK}	Crosstalk	R _L = 50 Ω, f = 1 MHz,	Switch ON, See Figure 18	25°C	5 V	−65			dB
THD	Total harmonic distortion	R _L = 600 Ω, C _L = 50 pF,	f = 600 Hz to 20 kHz, See Figure 19	25°C	5 V	0.01%			
SUPPLY									
I ₊	Positive supply current	V _{IN} = V ₊ or GND,	Switch ON or OFF	25°C	5.5 V	0.1			μA
				Full		0.5			

6.6 Electrical Characteristics for 3.3-V Supply

 $V_+ = 3 \text{ V to } 3.6 \text{ V}$ and $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	V ₊	MIN	TYP ⁽¹⁾	MAX	UNIT
ANALOG SWITCH									
V _{COM} , V _{NO} ,V _{NC}	Analog signal range					0		V ₊	V
r _{peak}	Peak ON-state resistance	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = −24 mA,	Switch ON, See Figure 10	25°C	3 V	1.35	2.2	Ω	
				Full		2.2			
r _{on}	ON-state resistance	V _{NO} or V _{NC} = 2 V, I _{COM} = −24 mA,	Switch ON, See Figure 10	25°C	3 V	1.15	1.8	Ω	
				Full		1.8			
Δr _{on}	ON-state resistance match between channels	V _{NO} or V _{NC} = 2 V, 0.8 V, I _{COM} = −24 mA,	Switch ON, See Figure 10	25°C	3 V	0.11		Ω	
r _{on(flat)}	ON-state resistance flatness	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = −24 mA,	Switch ON, See Figure 10	25°C	3 V	0.225		Ω	
		V _{NO} or V _{NC} = 2 V, 0.8 V, I _{COM} = −24 mA,		25°C		0.25			
I _{NC(OFF)} , I _{NO(OFF)}	NC, NO OFF leakage current	V _{NC} or V _{NO} = 3 V, V _{COM} = 0,	Switch OFF, See Figure 11	25°C	3.6 V	0.2		nA	
I _{NC(ON)} , I _{NO(ON)}	NC, NO ON leakage current	V _{NC} or V _{NO} = 3 V, V _{COM} = Open,	Switch ON, See Figure 12	25°C	3.6 V	2.8		nA	
I _{COM(ON)}	COM ON leakage current	V _{NC} or V _{NO} = 3 V or Open, V _{COM} = 3 V,	Switch ON, See Figure 12	25°C	3.6 V	0.47		nA	

 (1) $T_A = 25^\circ\text{C}$

Electrical Characteristics for 3.3-V Supply (continued)

 $V_+ = 3\text{ V to }3.6\text{ V}$ and $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	V ₊	MIN	TYP ⁽¹⁾	MAX	UNIT
DIGITAL INPUTS (IN)									
V _{IH}	Input logic high			Full		2		5.5	V
V _{IL}	Input logic low			Full		0		0.6	V
I _{IH} , I _{IL}	Input leakage current	V _{IN} = 5.5 V or 0		Full	3.6 V	−1		1	μA
DYNAMIC									
t _{ON}	Turn-on time	V _{COM} = V ₊ , R _L = 50 Ω	C _L = 35 pF, See Figure 15	25°C	3 V to 3.6 V	30	40		ns
				Full					
t _{OFF}	Turn-off time	V _{COM} = V ₊ , R _L = 50 Ω	C _L = 35 pF, See Figure 15	25°C	3 V to 3.6 V	20	25		ns
				Full					
t _{BBM}	Break-before-make time	V _{NC} = V _{NO} = V ₊ / 2, R _L = 50 Ω	C _L = 35 pF, See Figure 16	25°C	3 V to 3.6 V	1	21	29	ns
				Full					
Q _C	Charge injection	C _L = 1 nF, V _{GEN} = 0 V	See Figure 19	25°C	3.3 V	20			pC
C _{NC(OFF)} , C _{NO(OFF)}	NC, NO OFF capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch OFF	See Figure 13	25°C	3.3 V	23			pF
C _{NC(ON)} , C _{NO(ON)}	NC, NO ON capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch ON	See Figure 13	25°C	3.3 V	84			pF
C _{COM(ON)}	COM ON capacitance	V _{COM} = V ₊ or GND, Switch ON	See Figure 13	25°C	3.3 V	84			pF
C _{IN}	Digital input capacitance	V _{IN} = V ₊ or GND	See Figure 13	25°C	3.3 V	2.1			pF
BW	Bandwidth	R _L = 50 Ω, Switch ON	See Figure 16	25°C	3.3 V	100			MHz
O _{ISO}	OFF isolation	R _L = 50 Ω, f = 1 MHz	Switch OFF, See Figure 17	25°C	3.3 V	−65			dB
X _{TALK}	Crosstalk	R _L = 50 Ω, f = 1 MHz	Switch ON, See Figure 18	25°C	3.3 V	−65			dB
THD	Total harmonic distortion	R _L = 600 Ω, C _L = 50 pF	f = 600 Hz to 20 kHz, See Figure 19	25°C	3.3 V	0.015%			
SUPPLY									
I ₊	Positive supply current	V _{IN} = V ₊ or GND	Switch ON or OFF	25°C	3.6 V	0.1			μA
				Full		0.5			

6.7 Electrical Characteristics For 2.5-V Supply

 $V_+ = 2.3 \text{ V to } 2.7 \text{ V}$ and $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	V ₊	MIN	TYP ⁽¹⁾	MAX	UNIT
ANALOG SWITCH									
V _{COM} , V _{NO} ,V _{NC}	Analog signal range					0		V ₊	V
r _{peak}	Peak ON-state resistance	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = −8 mA	Switch ON, See Figure 10	25°C Full	2.5 V	1.7	2.9		Ω
						2.9			
r _{on}	ON-state resistance	V _{NO} or V _{NC} = 1.8 V, I _{COM} = −8 mA	Switch ON, See Figure 10	25°C Full	2.5 V	1.45	2.3		Ω
						2.3			
Δr _{on}	ON-state resistance match between channels	V _{NO} or V _{NC} = 0.8 V, 1.8 V, I _{COM} = −8 mA	Switch ON, See Figure 10	25°C	2.5 V	0.7			Ω
r _{on(flat)}	ON-state resistance flatness	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = −8 mA	Switch ON, See Figure 10	25°C	2.5 V	0.5			Ω
		V _{NO} or V _{NC} = 0.8 V, 1.8 V, I _{COM} = −8 mA		25°C		0.45			
I _{NC(OFF)} , I _{NO(OFF)}	NC, NO Off leakage current	V _{NC} or V _{NO} = 2.3 V, V _{COM} = 0	Switch OFF, See Figure 11	25°C	2.7 V	0.2			nA
I _{NC(ON)} , I _{NO(ON)}	NC, NO On leakage current	V _{NC} or V _{NO} = 2.3 V, V _{COM} = Open	Switch ON, See Figure 12	25°C	2.7 V	2.8			nA
I _{COM(ON)}	COM On leakage current	V _{NC} or V _{NO} = 2.3 V or Open, V _{COM} = 2.3 V	Switch ON, See Figure 12	25°C	2.7 V	0.47			nA
DIGITAL INPUTS (IN)									
V _{IH}	Input logic high			Full		1.8		5.5	V
V _{IL}	Input logic low			Full		0	0.6		V
I _{IH} , I _{IL}	Input leakage current	V _{IN} = 5.5 V or 0		Full	2.7 V	−1		1	μA
DYNAMIC									
t _{ON}	Turn-on time	V _{COM} = V ₊ , R _L = 50 Ω,	C _L = 35 pF, See Figure 15	25°C	2.3 V to 2.7 V	40	55		ns
				Full			70		
t _{OFF}	Turn-off time	V _{COM} = V ₊ , R _L = 50 Ω,	C _L = 35 pF, See Figure 15	25°C	2.3 V to 2.7 V	30	40		ns
				Full			55		
t _{BBM}	Break-before-make time	V _{NC} = V _{NO} = V ₊ / 2, R _L = 50 Ω,	C _L = 35 pF, See Figure 16	25°C	2.3 V to 2.7 V	1	33	39	ns
				Full		1			
Q _C	Charge injection	C _L = 1 nF, V _{GEN} = 0 V,	See Figure 19	25°C	2.5 V	13			pC
C _{NC(OFF)} , C _{NO(OFF)}	NC, NO OFF capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch OFF,	See Figure 14	25°C	2.5 V	23			pF
C _{NC(ON)} , C _{NO(ON)}	NC, NO ON capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch ON,	See Figure 14	25°C	2.5 V	84			pF
C _{COM(ON)}	COM ON capacitance	V _{COM} = V ₊ or GND, Switch ON,	See Figure 14	25°C	2.5 V	84			pF
C _{IN}	Digital input capacitance	V _{IN} = V ₊ or GND,	See Figure 14	25°C	2.5 V	2.1			pF
BW	Bandwidth	R _L = 50 Ω, Switch ON,	See Figure 16	25°C	2.5 V	100			MHz
O _{ISO}	OFF isolation	R _L = 50 Ω, f = 1 MHz,	Switch OFF, See Figure 17	25°C	2.5 V	−64			dB
X _{TALK}	Crosstalk	R _L = 50 Ω, f = 1 MHz,	Switch ON, See Figure 18	25°C	2.5 V	−64			dB
THD	Total harmonic distortion	R _L = 600 Ω, C _L = 50 pF,	f = 600 Hz to 20 kHz, See Figure 19	25°C	2.5 V	0.025%			
SUPPLY									
I ₊	Positive supply current	V _{IN} = V ₊ or GND,	Switch ON or OFF	25°C	2.7 V	0.1			μA
				Full		0.5			

 (1) $T_A = 25^\circ\text{C}$

6.8 Electrical Characteristics For 1.8-V Supply

 $V_+ = 1.65 \text{ V to } 1.95 \text{ V}$ and $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	V ₊	MIN	TYP ⁽¹⁾	MAX	UNIT
ANALOG SWITCH									
V _{COM} , V _{NO} , V _{NC}	Analog signal range					0		V ₊	V
r _{peak}	Peak ON-state resistance	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = −2 mA	Switch ON, See Figure 10	25°C	1.8 V	4	5.2		Ω
				Full		5.2			
r _{on}	ON-state resistance	V _{NO} or V _{NC} = 1.5 V, I _{COM} = −2 mA	Switch ON, See Figure 10	25°C	1.8 V	1.7	3.5		Ω
				Full		3.5			
Δr _{on}	ON-state resistance match between channels	V _{NO} or V _{NC} = 0.6 V, 1.5 V, I _{COM} = −2 mA	Switch ON, See Figure 10	25°C	1.8 V	0.7			Ω
				Full		0.7			
r _{on(flat)}	ON-state resistance flatness	0 ≤ V _{NO} or V _{NC} ≤ V ₊ , I _{COM} = −2 mA	Switch ON, See Figure 11	25°C	1.8 V	1.85			Ω
				Full		1.85			
		V _{NO} or V _{NC} = 0.6 V, 1.5 V, I _{COM} = −2 mA		25°C		0.9			
				Full		0.9			
I _{NC(OFF)} , I _{NO(OFF)}	NC, NO Off leakage current	V _{NC} or V _{NO} = 1.65 V, V _{COM} = 0	Switch OFF, See Figure 11	25°C	1.95 V	0.2			nA
I _{NC(ON)} , I _{NO(ON)}	NC, NO On leakage current	V _{NC} or V _{NO} = 1.65 V, V _{COM} = Open	Switch ON, See Figure 12	25°C	1.95 V	2.8			nA
I _{COM(ON)}	COM On leakage current	V _{NC} or V _{NO} = 1.65 V or Open, V _{COM} = 1.65 V	Switch ON, See Figure 12	25°C	1.95 V	0.47			nA
DIGITAL INPUTS (IN)									
V _{IH}	Input logic high			Full		1.5		5.5	V
V _{IL}	Input logic low			Full		0		0.6	V
I _{IH} , I _{IL}	Input leakage current	V _{IN} = 5.5 V or 0		Full	1.95 V	−1		1	μA
DYNAMIC									
t _{ON}	Turn-on time	V _{COM} = V ₊ , R _L = 50 Ω,	C _L = 35 pF, See Figure 15	25°C	1.65 V to 1.95 V	65	70		ns
				Full		95			
t _{OFF}	Turn-off time	V _{COM} = V ₊ , R _L = 50 Ω,	C _L = 35 pF, See Figure 15	25°C	1.65 V to 1.95 V	40	55		ns
				Full		70			
t _{BBM}	Break-before-make time	V _{NC} = V _{NO} = V ₊ / 2, R _L = 50 Ω,	C _L = 35 pF, See Figure 15	25°C	1.65 V to 1.95 V	1	60	72	ns
				Full		0.5			
Q _C	Charge injection	C _L = 1 nF, V _{GEN} = 0 V,	See Figure 19	25°C	1.8 V	13			pC
C _{NC(OFF)} , C _{NO(OFF)}	NC, NO OFF capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch OFF,	See Figure 14	25°C	1.8 V	23			pF
C _{NC(ON)} , C _{NO(ON)}	NC, NO ON capacitance	V _{NC} or V _{NO} = V ₊ or GND, Switch ON,	See Figure 14	25°C	1.8 V	84			pF
C _{COM(ON)}	COM ON capacitance	V _{COM} = V ₊ or GND, Switch ON,	See Figure 14	25°C	1.8 V	84			pF
C _{IN}	Digital input capacitance	V _{IN} = V ₊ or GND,	See Figure 14	25°C	1.8 V	2.1			pF
BW	Bandwidth	R _L = 50 Ω, Switch ON,	See Figure 16	25°C	1.8 V	100			MHz
O _{ISO}	OFF isolation	R _L = 50 Ω, f = 1 MHz,	Switch OFF, See Figure 17	25°C	1.8 V	−63			dB
X _{TALK}	Crosstalk	R _L = 50 Ω, f = 1 MHz,	Switch ON, See Figure 18	25°C	1.8 V	−63			dB
SUPPLY									
I ₊	Positive supply current	V _{IN} = V ₊ or GND,	Switch ON or OFF	25°C	1.95 V	0.1			μA
				Full		0.5			

(1) $T_A = 25^\circ\text{C}$

6.9 Typical Characteristics

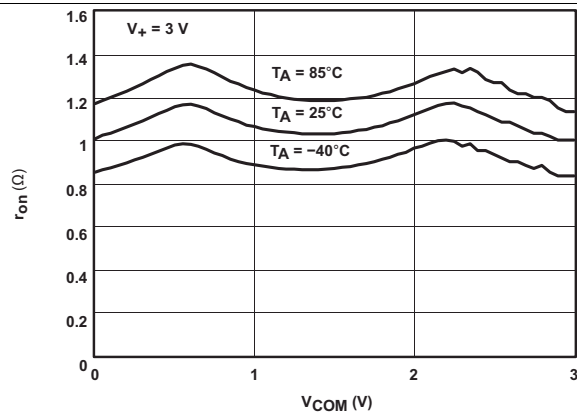


Figure 1. r_{on} vs V_{COM}

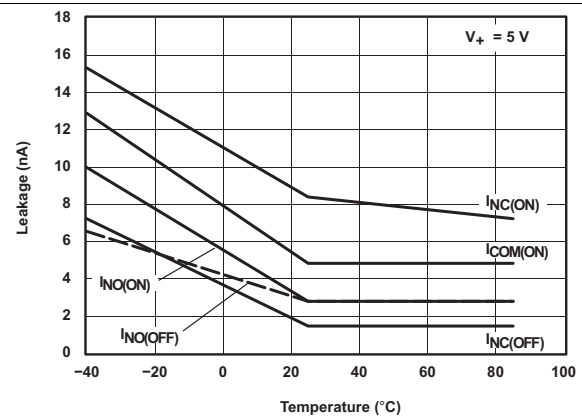


Figure 2. Leakage Current vs Temperature

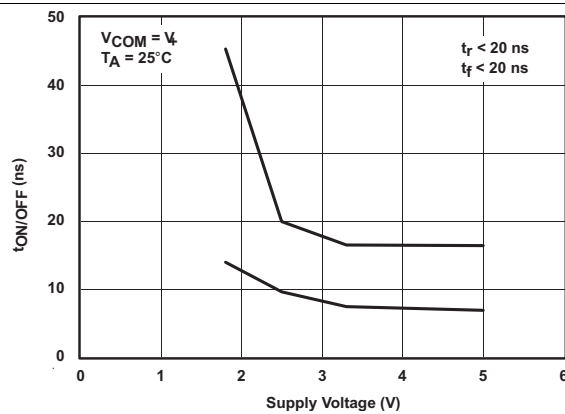


Figure 3. $t_{ON/OFF}$ vs V_+

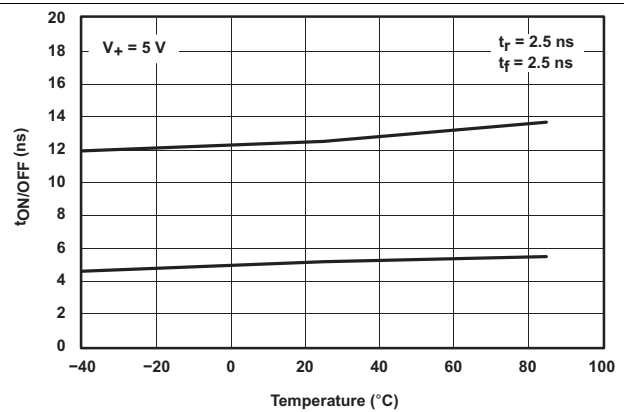


Figure 4. $t_{ON/OFF}$ vs Temperature

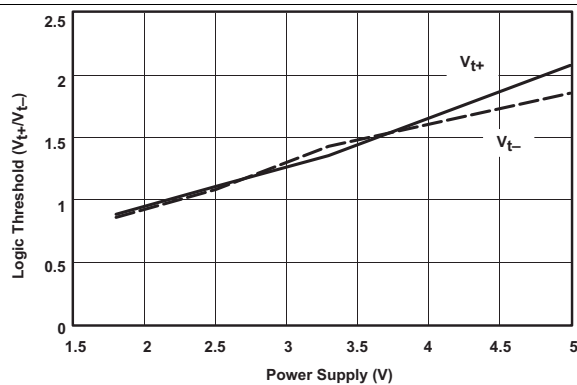


Figure 5. Logic Threshold vs Power Supply

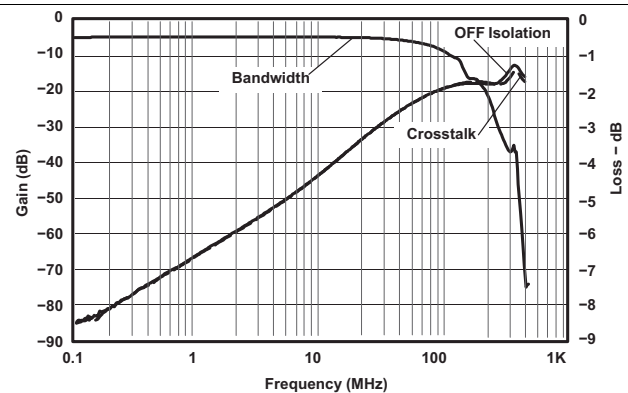


Figure 6. Frequency Response

Typical Characteristics (continued)

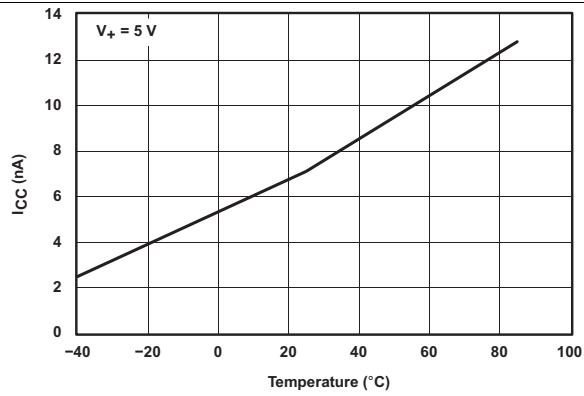


Figure 7. Power-Supply Current vs Temperature

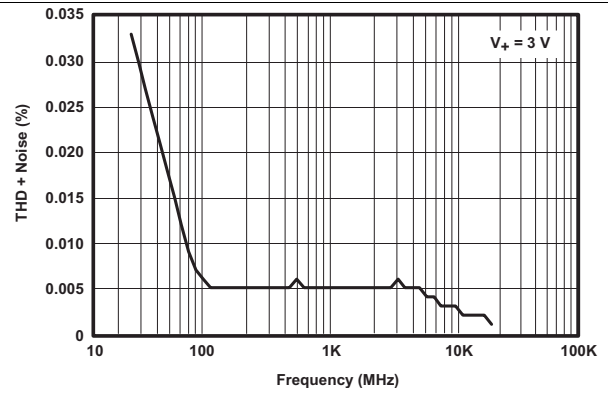


Figure 8. Total Harmonic Distortion (THD) vs Frequency

7 Parameter Measurement Information

Table 1. Parameter Description

SYMBOL	DESCRIPTION
V_{COM}	Voltage at COM
V_{NC}	Voltage at NC
V_{NO}	Voltage at NO
r_{on}	Resistance between COM and NC or COM and NO ports, when the channel is ON
r_{peak}	Peak ON-state resistance over a specified voltage range
Δr_{on}	Difference of r_{on} between channels
$ron(flat)$	Difference between the maximum and minimum value of r_{on} in a channel over the specified range of conditions
$I_{NC(OFF)}$	Leakage current measured at the NC port, with the corresponding channel (NC to COM) in the OFF state under worst-case input and output conditions
$I_{NO(OFF)}$	Leakage current measured at the NO port, with the corresponding channel (NO to COM) in the OFF state under worst-case input and output conditions
$I_{NC(ON)}$	Leakage current measured at the NC port, with the corresponding channel (NC to COM) in the ON state and the output (COM) being open
$I_{NO(ON)}$	Leakage current measured at the NO port, with the corresponding channel (NO to COM) in the ON state and the output (COM) being open
$I_{COM(ON)}$	Leakage current measured at the COM port, with the corresponding channel (COM to NO or COM to NC) in the ON state and the output (NC or NO) being open
V_{IH}	Minimum input voltage for logic high for the control input (IN)
V_{IL}	Minimum input voltage for logic low for the control input (IN)
V_{IN}	Voltage at IN
I_{IH}, I_{IL}	Leakage current measured at IN
t_{ON}	Turn-on time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog outputs (COM, NC, or NO) signal, when the switch is turning ON.
t_{OFF}	Turn-off time for the switch. This parameter is measured under the specified range of conditions and by the propagation delay between the digital control (IN) signal and analog outputs (COM, NC, or NO) signal, when the switch is turning OFF.
t_{BBM}	Break-before-make time. This parameter is measured under the specified range of conditions and by the propagation delay between the output of two adjacent analog channels (NC and NO), when the control signal changes state.
Q_C	Charge injection is a measurement of unwanted signal coupling from the control (IN) input to the analog (NC, NO, or COM) output. This is measured in coulomb (C) and measured by the total charge induced due to switching of the control input. Charge injection, $Q_C = C_L \times \Delta V_O$, C_L is the load capacitance, and ΔV_O is the change in analog output voltage.
$C_{NC(OFF)}$	Capacitance at the NC port when the corresponding channel (NC to COM) is OFF
$C_{NO(OFF)}$	Capacitance at the NO port when the corresponding channel (NO to COM) is OFF
$C_{NC(ON)}$	Capacitance at the NC port when the corresponding channel (NC to COM) is ON
$C_{NO(ON)}$	Capacitance at the NO port when the corresponding channel (NO to COM) is ON
$C_{COM(ON)}$	Capacitance at the COM port when the corresponding channel (COM to NC or COM to NO) is ON
C_{IN}	Capacitance of IN
O_{ISO}	OFF isolation of the switch is a measurement OFF-state switch impedance. This is measured in dB in a specific frequency, with the corresponding channel (NC to COM or NO to COM) in the OFF state.
X_{TALK}	Crosstalk is a measurement of unwanted signal coupling from an ON channel to an OFF channel (NC to NO or NO to NC). This is measured in a specific frequency and in dB.
BW	Bandwidth of the switch. This is the frequency in which the gain of an ON channel is –3 dB below the DC gain.
I_+	Static power-supply current with the control (IN) pin at V_+ or GND
ΔI_+	This is the increase in I_+ for each control (IN) input that is at the specified voltage, rather than at V_+ or GND.

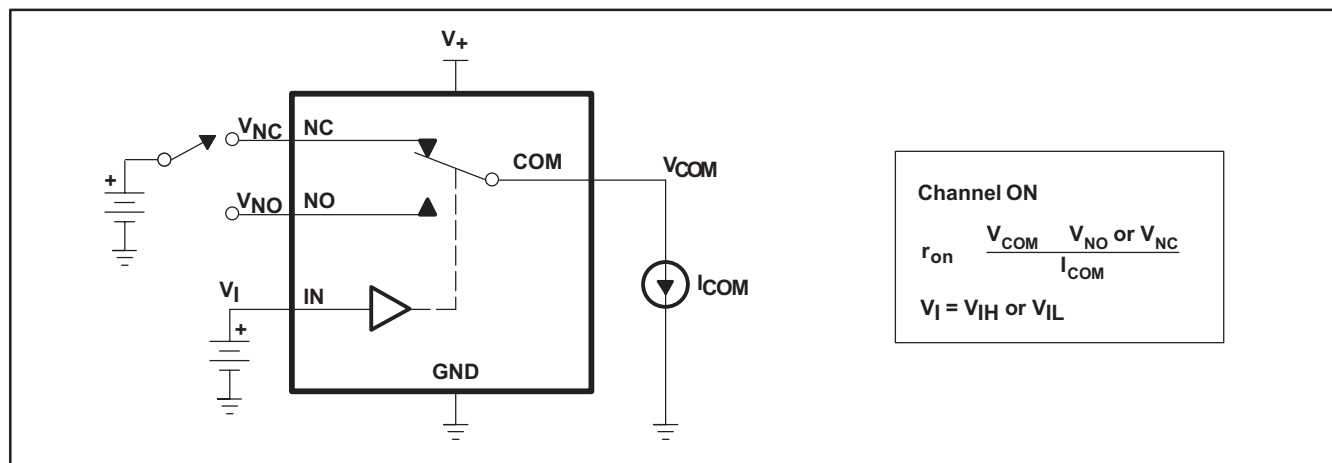


Figure 9. On-State Resistance (r_{on})

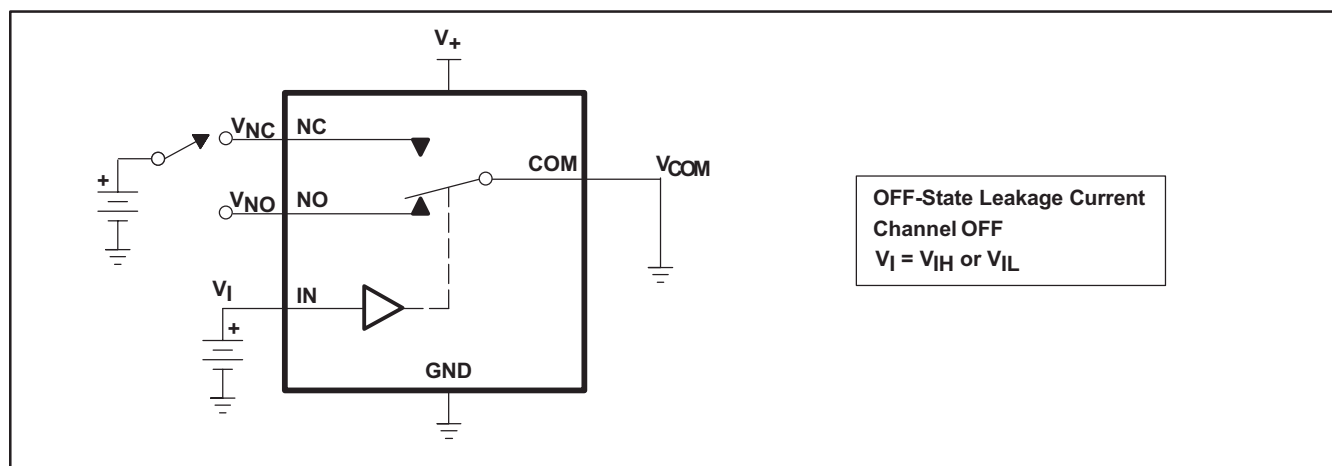


Figure 10. Off-State Leakage Current ($I_{NC(OFF)}$, $I_{NO(OFF)}$)

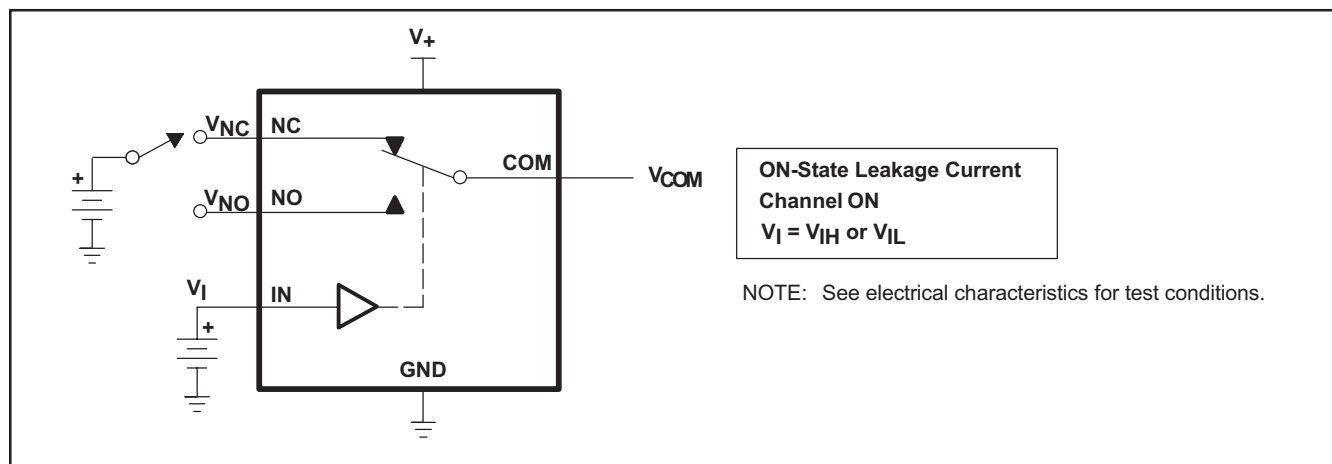


Figure 11. On-State Leakage Current ($I_{COM(ON)}$, $I_{NC(ON)}$, $I_{NO(ON)}$)


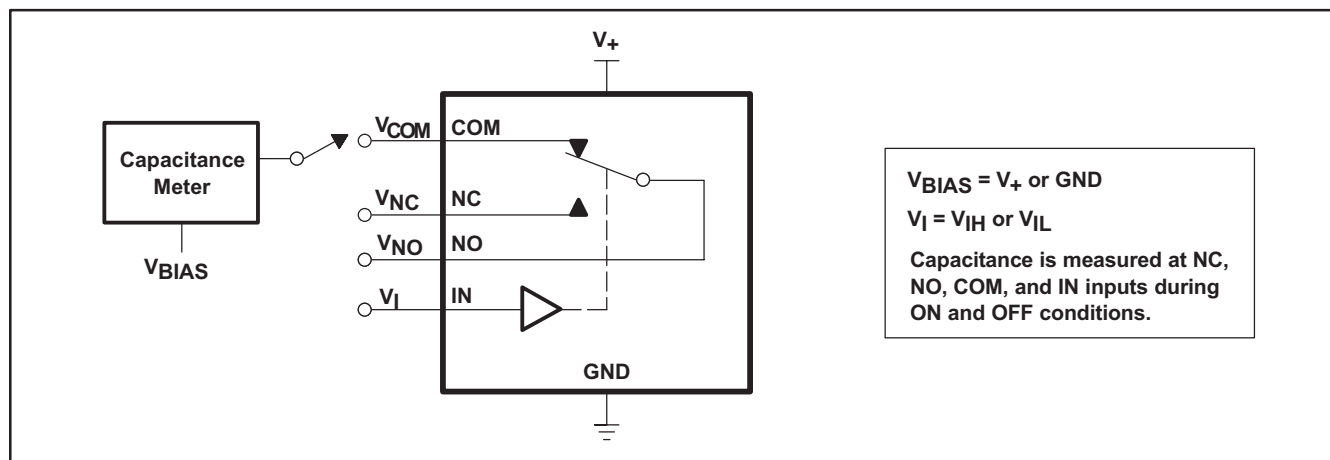



Figure 12. Capacitance (C_I , $C_{COM(ON)}$, $C_{NC(OFF)}$, $C_{NO(OFF)}$, $C_{NC(ON)}$, $C_{NO(ON)}$)

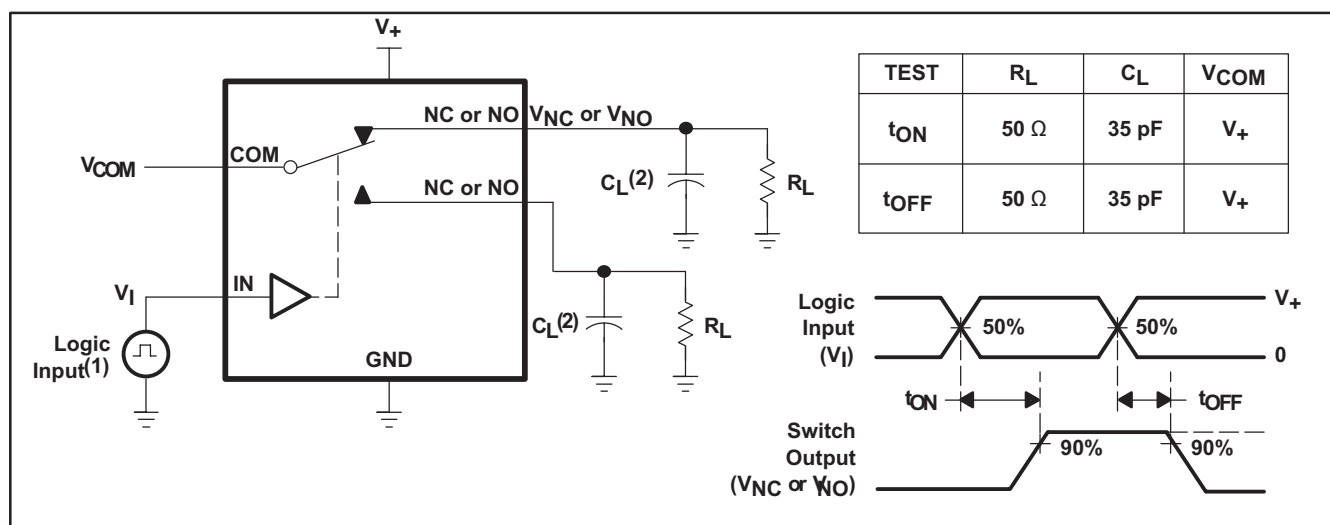

(1) All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r < 5 ns, t_f < 5 ns.

(2) C_L includes probe and jig capacitance.

Figure 13. Turn-On (t_{ON}) and Turn-Off Time (t_{OFF})

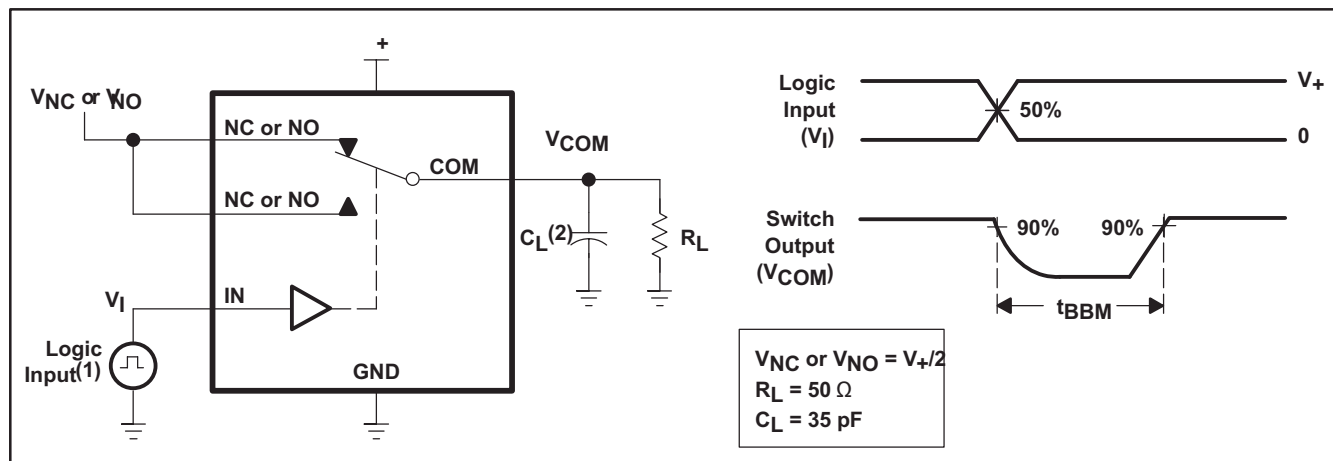

- (1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r < 5 \text{ ns}$, $t_f < 5 \text{ ns}$.
 (2) C_L includes probe and jig capacitance.

Figure 14. Break-Before-Make Time (t_{BBM})

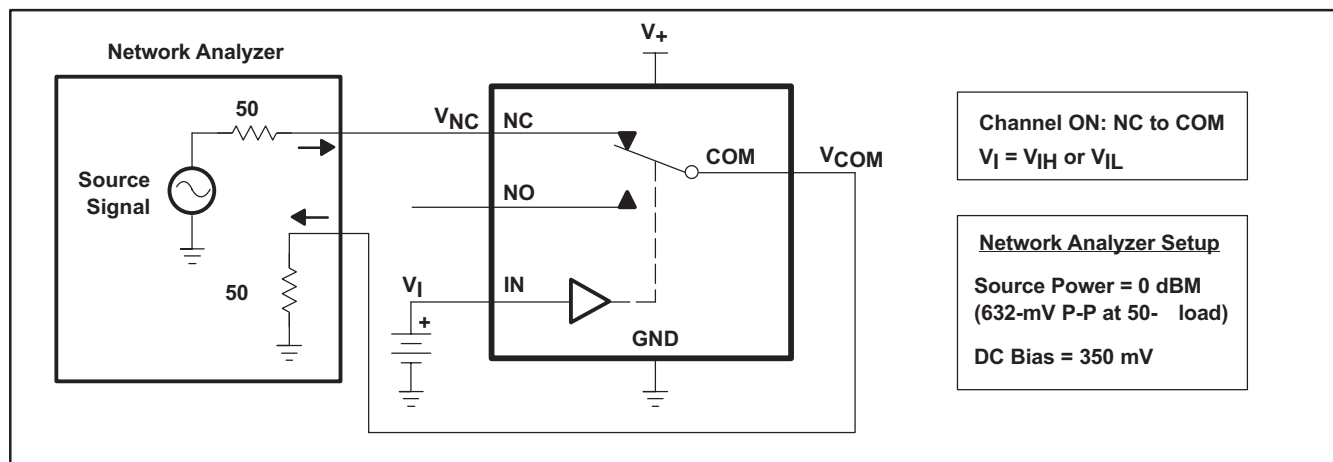


Figure 15. Bandwidth (BW)

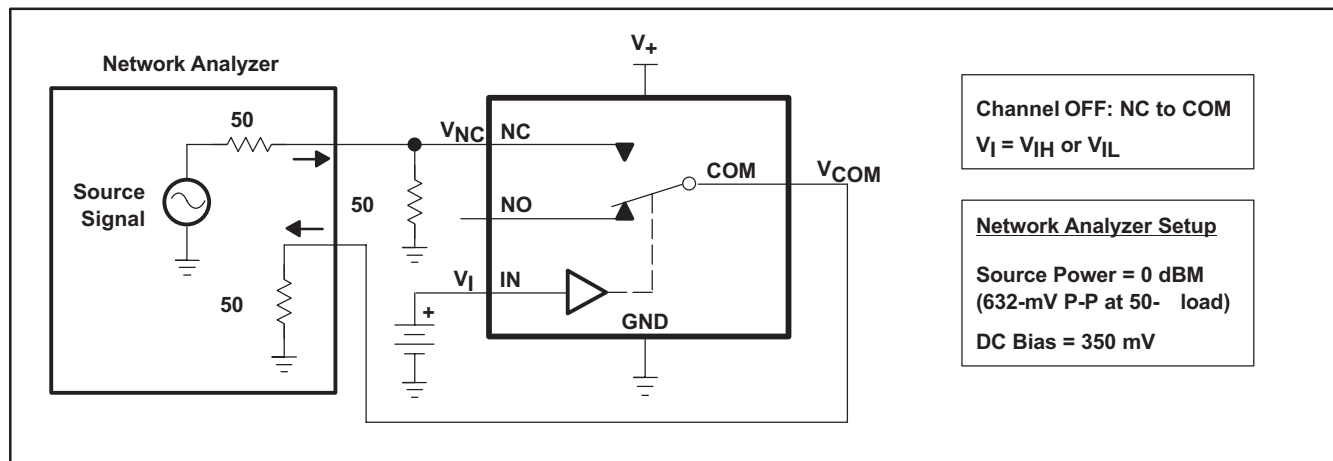
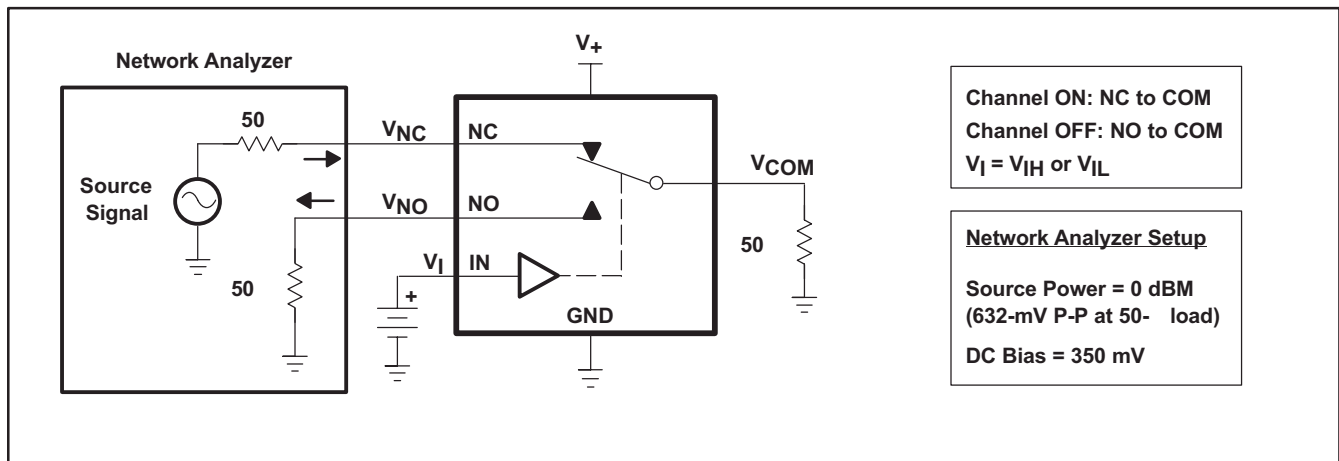
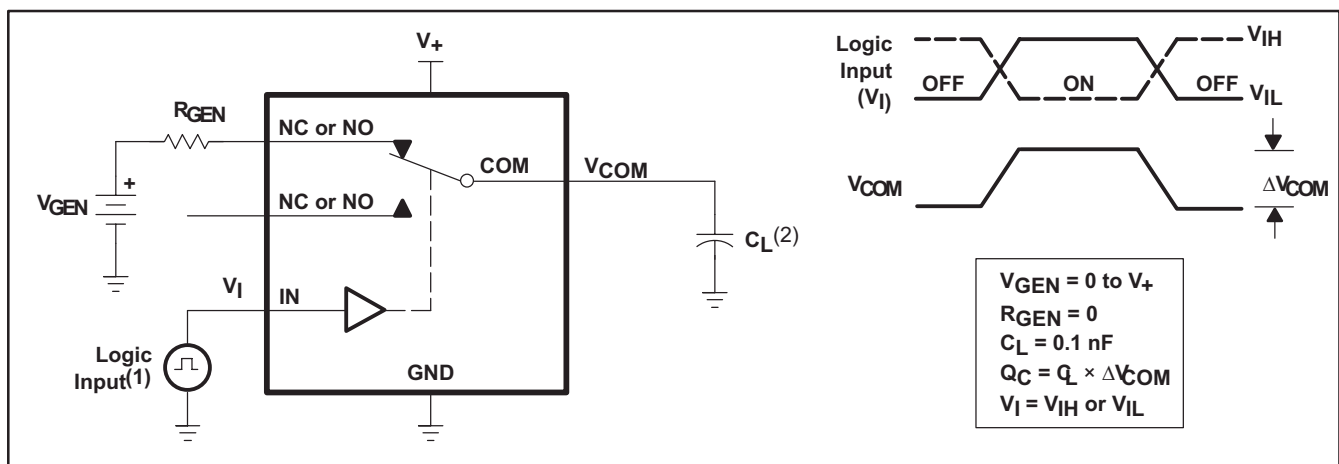
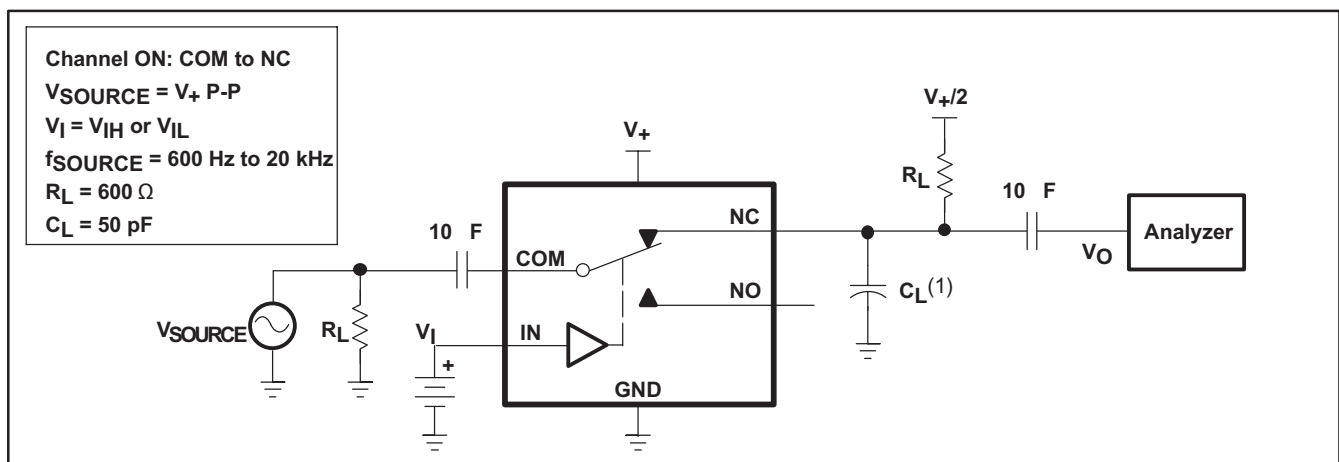


Figure 16. OFF Isolation (O_{ISO})


Figure 17. Crosstalk (X_{TALK})


(1) All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r < 5 \text{ ns}$, $t_f < 5 \text{ ns}$.

(2) C_L includes probe and jig capacitance.

Figure 18. Charge Injection (Q_C)


(1) C_L includes probe and jig capacitance.


Figure 19. Total Harmonic Distortion (THD)

8 Detailed Description

8.1 Overview

The TS5A3159-Q1 is a single-pole double-throw (SPDT) analog switch designed to operate from 1.65 V to 5.5 V. Either the NO or the NC pin is shorted to the COM pin, depending on the logic level input to the IN pin.

8.2 Functional Block Diagram

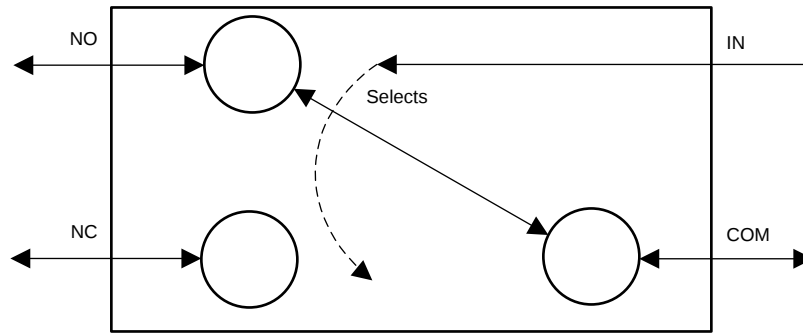

8.3 Feature Description

The main feature of this device is the excellent total harmonic distortion performance and low power consumption. Additionally, the NO, NC, and COM pins can be used as either inputs or outputs.

Table 2. Summary Of Characteristics⁽¹⁾

CONFIGURATION	2:1 MULTIPLEXER / DEMULTIPLEXER (1 × SPDT)
Number of channels	1
ON-state resistance (r_{on})	1.3 Ω
ON-state resistance match (Δr_{on})	0.1 Ω
ON-state resistance flatness ($r_{on(flat)}$)	0.15 Ω
Turn on/turn off time (t_{ON} / t_{OFF})	20 ns / 15 ns
Break-before-make time (t_{BBM})	12 ns
Charge injection (Q_C)	36 pC
Bandwidth (BW)	100 MHz
OFF isolation (O_{ISO})	–65 dB at 1 MHz
Crosstalk (X_{TALK})	–65 dB at 1 MHz
Total harmonic distortion (THD)	0.01%
Leakage current ($I_{NO(OFF)}$ / $I_{NC(OFF)}$)	± 6 nA
Package option	6-pin DBV

(1) $V_+ = 5$ V and $T_A = 25^\circ\text{C}$

8.4 Device Functional Modes

Table 3 lists the functions for the TS5A3159-Q1 device.

Table 3. Function Table

IN	NC TO COM, COM TO NC	NO TO COM, COM TO NO
L	ON	OFF
H	OFF	ON

9 Applications and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

Analog switches are commonly used in battery powered applications to route audio signals. A typical use case is highlighted in [Figure 20](#). The analog switch is supplied with 5 V and the control input is from a 5-V processor GPIO. In this case, there are no concerns related to excess power consumption.

9.2 Typical Application

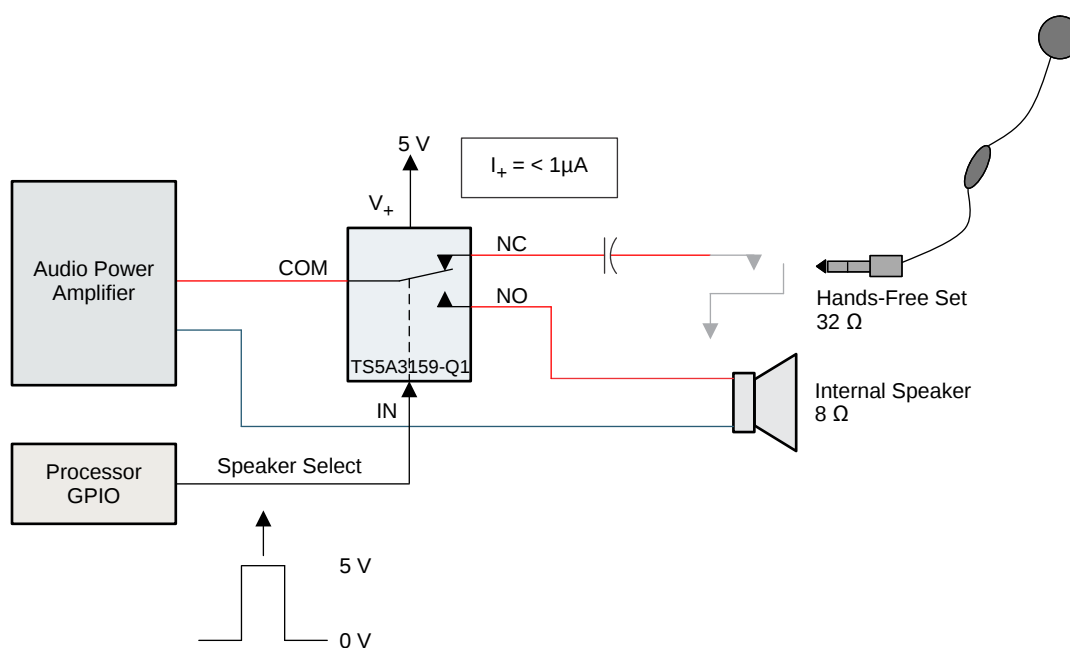


Figure 20. Typical Application Schematic

9.2.1 Design Requirements

In this application example, the device receives the control signal from a 5-V GPIO and common input from an Audio Power amplifier. The input is routed to either the Hands free set or the internal speaker depending upon the control signal.

9.2.2 Detailed Design Procedure

Since the control signal varies from 0 to 5 V (Vdd), there's no excess current consumption. However, if the control signal comes from lower voltage GPIOs while the V+ of TS5A3159 is connected to the battery whose voltage varies, it can lead to an excess current draw from the V+ suppl pin. Such a scenario requires the use of an external voltage level translator such as the SN74LVC1T45. For more information see [Preventing Excess Current Consumption on Analog Switches](#), SCDA011.

Typical Application (continued)

9.2.3 Application Curve

The ON state resistance of the switch is a critical parameter to measure since it helps select the right switch for the application. The on state resistance versus the common voltage can be seen in Figure 21.

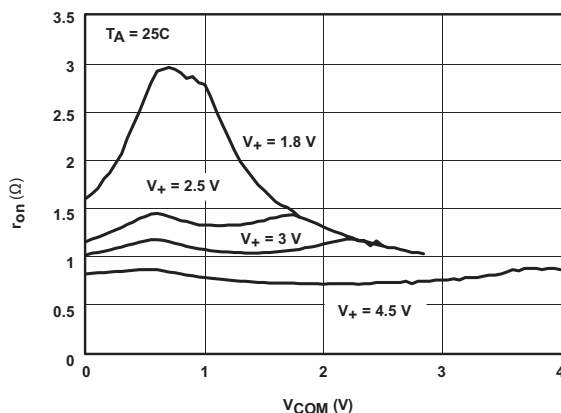


Figure 21. r_{on} vs V_{COM}

10 Power Supply Recommendations

Most systems have a common 3.3 V or 5 V rail that can supply the V+ pin of this device. If this is not available, a Switch-Mode-Power-Supply (SMPS) or a Linear Dropout Regulator (LDO) can supply this device from a higher voltage rail. Proper decoupling of the supply rail is a must to avoid any spikes that may exceed the absolute ratings of the V+ pin of the device.

11 Layout

11.1 Layout Guidelines

TI recommends to keep signal lines as short as possible. Incorporation of microstrip or stripline techniques is also recommended when signal lines are greater than 1 inch in length. These traces must be designed with a characteristic impedance of either 50 Ω or 75 Ω, as required by the application. Do not place this device too close to high voltage switching components, as they may cause interference.

11.2 Layout Example

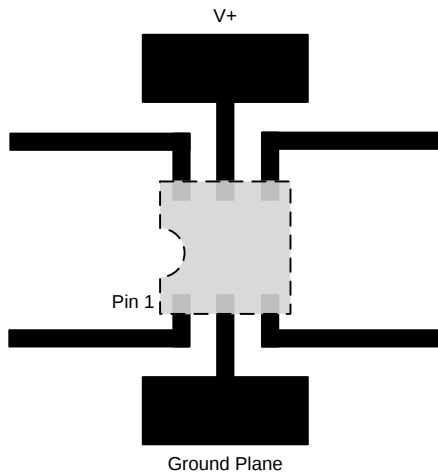


Figure 22. Layout Example

12 器件和文档支持

12.1 文档支持

12.1.1 相关文档

相关文档如下：

《防止模拟开关电流消耗过大》（文献编号：SCDA011）

12.2 接收文档更新通知

如需接收文档更新通知，请访问 www.ti.com.cn 网站上的器件产品文件夹。点击右上角的提醒我 (Alert me) 注册后，即可每周定期收到已更改的产品信息。有关更改的详细信息，请查阅已修订文档中包含的修订历史记录。

12.3 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.4 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.5 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

12.6 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。要获得这份数据表的浏览器版本，请查阅左侧的导航栏。

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内, 且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定, 否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务 的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时, 如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分, 则会失去相关 TI 组件 或服务的所有明示或暗示授权, 且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意, 尽管任何应用相关信息或支持仍可能由 TI 提供, 但他们将独力负责满足与其产品及其应用中使用的 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意, 他们具备制定与实施安全措施所需的全部专业技术和知识, 可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中, 为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此, 此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III (或类似的生命攸关医疗设备) 的授权许可, 除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或“增强型塑料”的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意, 对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用, 其风险由客户单独承担, 并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品, 这些产品主要用于汽车。在任何情况下, 因使用非指定产品而无法达到 ISO/TS16949 要求, TI 不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com.cn/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道1568号, 中建大厦32楼邮政编码: 200122
Copyright © 2016, 德州仪器半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TS5A3159QDBVRQ1	ACTIVE	SOT-23	DBV	6	3000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	UAAQ	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSELETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TS5A3159QDBVRQ1	SOT-23	DBV	6	3000	180.0	8.4	3.23	3.17	1.37	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TS5A3159QDBVRQ1	SOT-23	DBV	6	3000	202.0	201.0	28.0

EXAMPLE BOARD LAYOUT


DBV0006A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

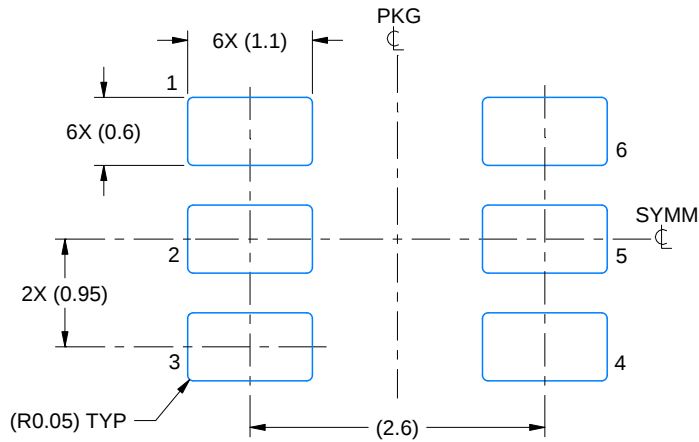

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

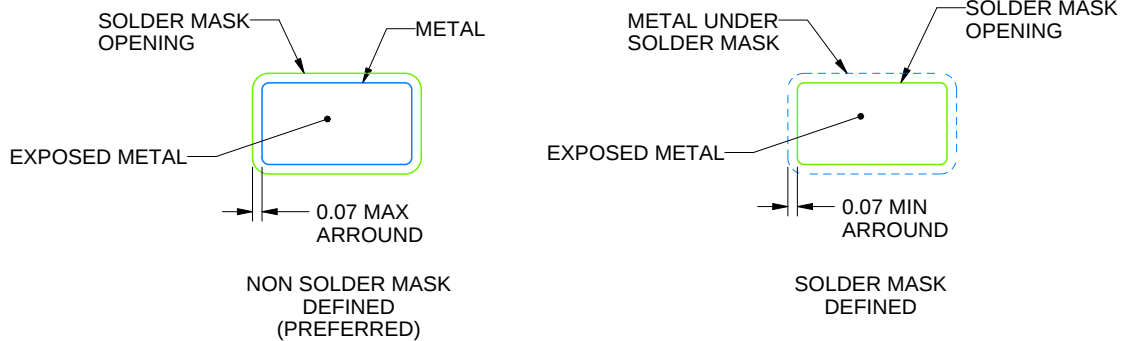

SOLDER MASK DETAILS

4214840/B 03/2018

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0006A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

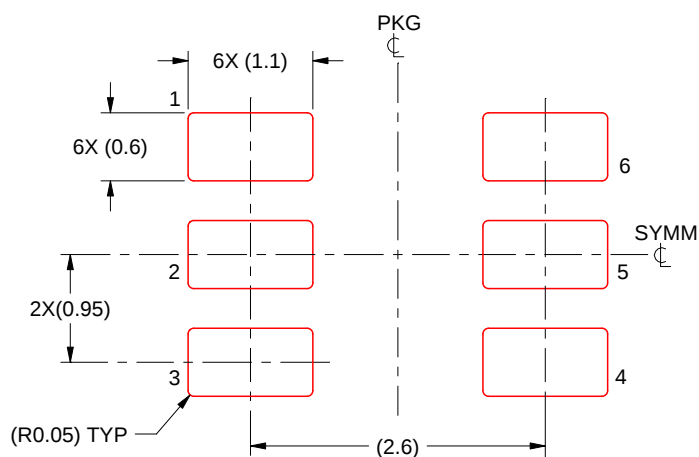

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X


4214840/B 03/2018

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

DCK (R-PDSO-G6)

PLASTIC SMALL-OUTLINE PACKAGE

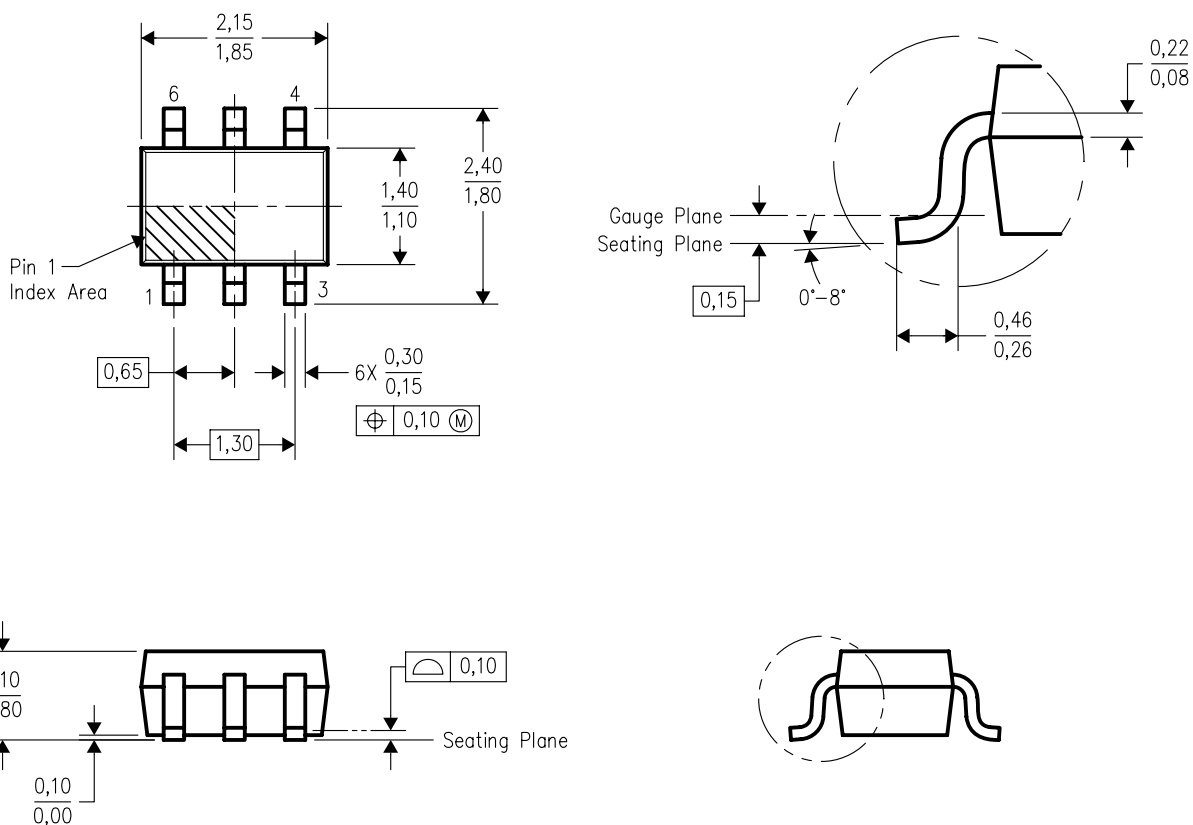

4093553-4/G 01/2007

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
 - Falls within JEDEC MO-203 variation AB.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司