

# LM3528 High Efficiency, Multi Display LED Driver with 128 Exponential Dimming Steps and Integrated OLED Power Supply in a 1.2mm x 1.6mm DSBGA Package

Check for Samples: [LM3528](#)

## FEATURES

- 128 Exponential Dimming Steps
- Programmable Auto-Dimming Function
- Up to 90% Efficient
- Low Profile 12 Bump DSBGA Package (1.2mm x 1.6mm x 0.6mm)
- Integrated OLED Display Power Supply and LED Driver
- Programmable Pattern Generator Output for LED Indicator Function
- Drives up to 12 LED's at 20mA
- Drives up to 5 LED's at 20mA and delivers 18V at 40mA
- 1% Accurate Current Matching Between Strings
- Internal Soft-Start Limits Inrush Current
- True Shutdown Isolation for LED's
- Wide 2.5V to 5.5V Input Voltage Range
- 22V Over-Voltage Protection
- 1.25MHz Fixed Frequency Operation
- Dedicated Programmable General Purpose I/O
- Active Low Hardware Reset

## APPLICATIONS

- Dual Display LCD Backlighting for Portable Applications
- Large Format LCD Backlighting
- OLED Panel Power Supply
- Display Backlighting with Indicator Light

## DESCRIPTION

The LM3528 current mode boost converter offers two separate outputs. The first output (MAIN) is a constant current sink for driving series white LED's. The second output (SUB/FB) is configurable as a constant current sink for series white LED bias, or as a feedback pin to set a constant output voltage for powering OLED panels.

As a dual output white LED bias supply, the LM3528 adaptively regulates the supply voltage of the LED strings to maximize efficiency and insure the current sinks remain in regulation. The maximum current per output is set via a single external low power resistor. An I<sup>2</sup>C compatible interface allows for independent adjustment of the LED current in either output from 0 to max current in 128 exponential steps. When configured as a white LED + OLED bias supply the LM3528 can independently and simultaneously drive a string of up to 6 white LED's and deliver a constant output voltage of up to 21V for OLED panels.

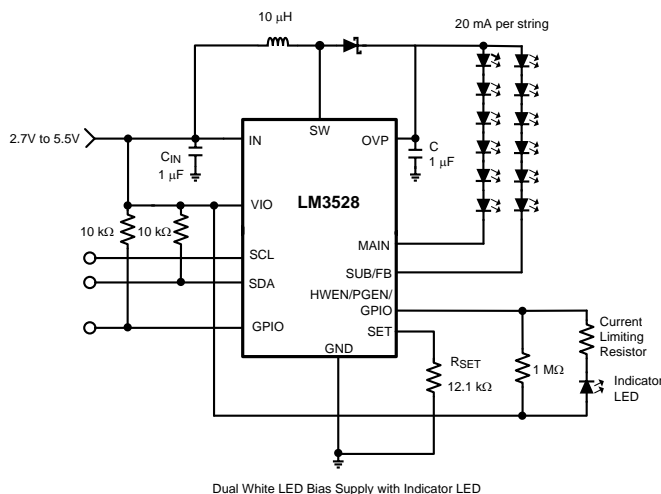


Figure 1. Typical Application Circuit

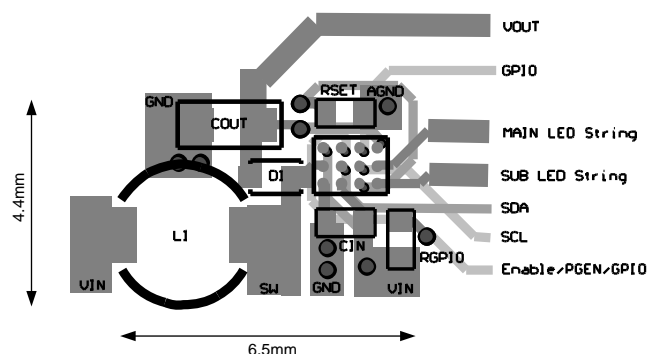


Figure 2. Typical PCB Layout



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2008–2013, Texas Instruments Incorporated




This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## DESCRIPTION (CONTINUED)

Output over-voltage protection shuts down the device if  $V_{OUT}$  rises above 22V allowing for the use of small sized low voltage output capacitors. Other features include a dedicated general purpose I/O (GPIO) and a multi-function pin (HWEN/PGEN/GPIO) which can be configured as a 32 bit pattern generator, a hardware enable input, or as a GPIO. When configured as a pattern generator, an arbitrary pattern is programmed via the I<sup>2</sup>C compatible interface and output at HWEN/PGEN/GPIO for indicator LED flashing or for external logic control. The LM3528 is offered in a tiny 12-bump DSBGA package and operates over the -40°C to +85°C temperature range.

## Connection Diagram



**Figure 3. 12-Bump (1.215mm × 1.615mm × 0.6mm) YFQ0012**

## PIN DESCRIPTIONS

| Pin | Name           | Function   |
|-----|----------------|--|
| A1  | OVP            | Over-Voltage Protection Sense Connection. Connect OVP to the positive terminal of the output capacitor.  |
| A2  | MAIN           | Main Current Sink Input.   |
| A3  | SUB/FB         | Secondary Current Sink Input or 1.21V Feedback Connection for Constant Voltage Output.   |
| B1  | GPIO1          | Programmable General Purpose I/O.  |
| B2  | SCL            | Serial Clock Input   |
| B3  | SET            | LED Current Setting Connection. Connect a resistor from SET to GND to set the maximum LED current into MAIN or SUB/FB (when in LED mode), where $I_{LED\_MAX} = 192 \times 1.244V / R_{SET}$ . |
| C1  | HWEN/PGEN/GPIO | Active High Hardware Enable Input. Programmable Pattern Generator Output, and Programmable General Purpose I/O.  |
| C2  | SDA            | Serial Data Input/Output   |
| C3  | IN             | Input Voltage Connection. Connect IN to the input supply, and bypass to GND with a 1µF ceramic capacitor.  |
| D1  | VIO            | Logic Voltage Level Input  |
| D2  | SW             | Drain Connection for Internal NMOS Switch  |
| D3  | GND            | Ground   |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## Absolute Maximum Ratings <sup>(1)(2)(3)</sup>

|   |                    |
|---|--------------------|
| $V_{IN}$  | -0.3V to 6V        |
| $V_{SW}$ , $V_{OVP}$  | -0.3V to 25V       |
| $V_{SUB/FB}$ , $V_{MAIN}$                                       | -0.3V to 23V       |
| $V_{SCL}$ , $V_{SDA}$ , $V_{RESET/GPIO}$ , $V_{IO}$ , $V_{SET}$ | -0.3V to 6V        |
| Continuous Power Dissipation                                    | Internally Limited |
| Junction Temperature ( $T_{J-MAX}$ )                            | +150°C             |
| Storage Temperature Range                                       | -65°C to +150°C    |
| Maximum Lead Temperature (Soldering, 10s) <sup>(4)</sup>        | +300°C             |
| ESD Rating <sup>(5)</sup><br>Human Body Model                   | 2.5kV              |

- (1) Absolute maximum ratings are limits beyond which damage to the device may occur. Operating Ratings are conditions for which the device is intended to be functional, but device parameter specifications may not be ensured. For ensured specifications and test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/Distributors for availability and specifications.
- (3) All voltages are with respect to the potential at the GND pin.
- (4) For detailed soldering specifications and information, please refer to Texas Instruments Application Note 1112: DSBGA Wafer Level Chip Scale Package ([SNVA009](#)).
- (5) The human body model is a 100pF capacitor discharged through 1.5kΩ resistor into each pin. (MIL-STD-883 3015.7).

## Operating Ratings <sup>(1)(2)</sup>

|   |                 |
|---|-----------------|
| $V_{IN}$  | 2.5V to 5.5V    |
| $V_{SW}$ , $V_{OVP}$                                | 0V to 23V       |
| $V_{SUB/FB}$ , $V_{MAIN}$                           | 0V to 21V       |
| Junction Temperature Range ( $T_J$ ) <sup>(3)</sup> | -40°C to +110°C |
| Ambient Temperature Range ( $T_A$ ) <sup>(4)</sup>  | -40°C to +85°C  |

- (1) Absolute maximum ratings are limits beyond which damage to the device may occur. Operating Ratings are conditions for which the device is intended to be functional, but device parameter specifications may not be ensured. For ensured specifications and test conditions, see the Electrical Characteristics.
- (2) All voltages are with respect to the potential at the GND pin.
- (3) Internal thermal shutdown circuitry protects the device from permanent damage. Thermal shutdown engages at  $T_J$ =+150°C (typ.) and disengages at  $T_J$ =+140°C (typ.).
- (4) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature ( $T_{A-MAX}$ ) is dependent on the maximum operating junction temperature ( $T_{J-MAX-OP}$  = +105°C), the maximum power dissipation of the device in the application ( $P_{D-MAX}$ ), and the junction-to ambient thermal resistance of the part/package in the application ( $\theta_{JA}$ ), as given by the following equation:  $T_{A-MAX} = T_{J-MAX-OP} - (\theta_{JA} \times P_{D-MAX})$ .

## Thermal Properties

|   |        |
|---|--------|
| Junction to Ambient Thermal Resistance ( $\theta_{JA}$ ) <sup>(1)</sup> | 68°C/W |
|---|--------|

- (1) Junction-to-ambient thermal resistance ( $\theta_{JA}$ ) is taken from a thermal modeling result, performed under the conditions and guidelines set forth in the JEDEC standard JESD51-7. The test board is a 4-layer FR-4 board measuring 114.3mm x 76.2mm x 1.6mm. The ground plane on the board is 113mm x 75mm. Thickness of copper layers are 71.5μm/35μm/35μm/71.5μm (2oz/1oz/1oz/2oz). Ambient temperature in simulation is 22°C, still air. Power dissipation is 1W. For more information on these topics, please refer to Texas Instruments Application Note 1112 [SNVA009](#), and JEDEC Standard JESD51-7.

## Electrical Characteristics

Specifications in standard type face are for  $T_A = 25^\circ\text{C}$  and those in **boldface type** apply over the Operating Temperature Range of  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ . Unless otherwise specified  $V_{IN} = 3.6\text{V}$ ,  $V_{IO} = 1.8\text{V}$ ,  $V_{RESET/GPIO} = V_{IN}$ ,  $V_{SUB/FB} = V_{MAIN} = 0.5\text{V}$ ,  $R_{SET} = 12.0\text{k}\Omega$ ,  $OLED = '0'$ ,  $ENM = ENS = '1'$ ,  $BSUB = BMAIN = \text{Full Scale}$ . <sup>(1) (2)</sup>

| Symbol    | Parameter   | Conditions                                   | Min         | Typ | Max       | Units |
|-----------|---|--|-------------|-----|-----------|-------|
| $I_{LED}$ | Output Current Regulation<br>MAIN or SUB/FB Enabled | UNI = '0', or '1',<br>2.5V < $V_{IN}$ < 5.5V | <b>18.5</b> | 20  | <b>22</b> |       |
|           | Maximum Current Per<br>Current Sink                 | $R_{SET} = 8.0\text{k}\Omega$                |             | 30  |           | mA    |

- (1) All voltages are with respect to the potential at the GND pin.
- (2) Min and Max limits are ensured by design, test, or statistical analysis. Typical (Typ) numbers are not ensured, but represent the most likely norm.

## Electrical Characteristics (continued)

Specifications in standard type face are for  $T_A = 25^\circ\text{C}$  and those in **boldface type** apply over the Operating Temperature Range of  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ . Unless otherwise specified  $V_{IN} = 3.6\text{V}$ ,  $V_{IO} = 1.8\text{V}$ ,  $V_{\text{RESET}/\text{GPIO}} = V_{IN}$ ,  $V_{\text{SUB}/\text{FB}} = V_{\text{MAIN}} = 0.5\text{V}$ ,  $R_{\text{SET}} = 12.0\text{k}\Omega$ ,  $\text{OLED} = '0'$ ,  $\text{ENM} = \text{ENS} = '1'$ ,  $\text{BSUB} = \text{BMAIN} = \text{Full Scale}$ .<sup>(1) (2)</sup>

| Symbol   | Parameter  | Conditions   | Min  | Typ   | Max   | Units         |
|--|--|--|--|-------|---|---------------|
| $I_{\text{LED-MATCH}}$   | $I_{\text{MAIN}}$ to $I_{\text{SUB}/\text{FB}}$ Current Matching | $\text{UNI} = '1'$ ,<br>$2.5\text{V} < V_{IN} < 5.5\text{V}$ <sup>(3)</sup>  |  | 0.15  | <b>1</b>                                      | %             |
| $V_{\text{SET}}$   | SET Pin Voltage  | $3.0\text{V} < V_{IN} < 5\text{V}$   |  | 1.244 |   | V             |
| $I_{\text{LED}}/I_{\text{SET}}$  | $I_{\text{LED}}$ Current to $I_{\text{SET}}$ Current Ratio       |  |  | 192   |   |               |
| $V_{\text{REG\_CS}}$   | Regulated Current Sink Headroom Voltage                          |  |  | 500   |   | mV            |
| $V_{\text{REG\_OLED}}$   | $V_{\text{SUB}/\text{FB}}$ Regulation Voltage in OLED Mode       | $2.5\text{V} < V_{IN} < 5.5\text{V}$ , $\text{OLED} = '1'$   | <b>1.170</b>                                 | 1.21  | <b>1.237</b>                                  | V             |
| $V_{\text{HR}}$  | Current Sink Minimum Headroom Voltage                            | $I_{\text{LED}} = 95\%$ of nominal   |  | 300   |   | mV            |
| $R_{\text{DS(on)}}$  | NMOS Switch On Resistance  | $I_{\text{SW}} = 100\text{mA}$   |  | 0.43  |   | $\Omega$      |
| $I_{\text{CL}}$  | NMOS Switch Current Limit  | $2.5\text{V} < V_{IN} < 5.5\text{V}$   | <b>645</b>                                   | 770   | <b>900</b>                                    | mA            |
| $V_{\text{OVP}}$   | Output Over-Voltage Protection                                   | ON Threshold,<br>$2.5\text{V} < V_{IN} < 5.5\text{V}$  | <b>20.6</b>                                  | 22    | <b>23</b>                                     | V             |
|  |  | OFF Threshold,<br>$2.7\text{V} < V_{IN} < 5.5\text{V}$   | <b>19.25</b>                                 | 20.6  | <b>21.5</b>                                   |               |
| $f_{\text{SW}}$  | Switching Frequency  |  | <b>1.0</b>                                   | 1.27  | <b>1.4</b>                                    | MHz           |
| $D_{\text{MAX}}$   | Maximum Duty Cycle   |  |  | 90    |   | %             |
| $D_{\text{MIN}}$   | Minimum Duty Cycle   |  |  | 10    |   | %             |
| $I_{\text{Q}}$   | Quiescent Current, Device Not Switching                          | $V_{\text{MAIN}}$ and $V_{\text{SUB}/\text{FB}} > V_{\text{REG\_CS}}$ ,<br>$\text{BSUB} = \text{BMAIN} = 0\text{x}00$ , $2.5\text{V} < V_{IN} < 5.5\text{V}$                     |  | 350   | <b>390</b>                                    | $\mu\text{A}$ |
|  |  | $V_{\text{SUB}/\text{FB}} > V_{\text{REG\_OLED}}$ ,<br>$\text{OLED} = '1'$ , $\text{ENM} = \text{ENS} = '0'$ ,<br>$R_{\text{SET}}$ Open,<br>$2.5\text{V} < V_{IN} < 5.5\text{V}$ |  | 250   | <b>260</b>                                    |               |
| $I_{\text{SHDN}}$  | Shutdown Current   | $\text{ENM} = \text{ENS} = \text{OLED} = '0'$ ,<br>$2.5\text{V} < V_{IN} < 5.5\text{V}$  |  | 1.8   | <b>3</b>                                      | $\mu\text{A}$ |
| <b>HWEN/PGEN/GPIO, GPIO1 Pin Voltage Specifications</b>  |  |  |  |       |   |               |
| $V_{\text{IL}}$  | Input Logic Low  | $2.5\text{V} < V_{IN} < 5.5\text{V}$ , $\text{MODE bit} = 0$   |  |       | <b>0.5</b>                                    | V             |
| $V_{\text{IH}}$  | Input Logic High   | $2.5\text{V} < V_{IN} < 5.5\text{V}$ , $\text{MODE bit} = 0$   | <b>1.1</b>                                   |       |   | V             |
| $V_{\text{OL}}$  | Output Logic Low   | $I_{\text{LOAD}} = 3\text{mA}$ , $\text{MODE bit} = 1$   |  |       | <b>400</b>                                    | mV            |
| <b>I<sup>2</sup>C Compatible Voltage Specifications (SCL, SDA, VIO)</b>                                |  |  |  |       |   |               |
| $V_{\text{IO}}$  | Serial Bus Voltage Level   | $2.5\text{V} < V_{IN} < 5.5\text{V}$ <sup>(4)</sup>  | <b>1.7</b>                                   |       | $V_{IN}$                                      | V             |
| $V_{\text{IL}}$  | Input Logic Low  | $2.5\text{V} < V_{IN} < 5.5\text{V}$   |  |       | <b><math>0.36 \times V_{\text{IO}}</math></b> | V             |
| $V_{\text{IH}}$  | Input Logic High   | $2.5\text{V} < V_{IN} < 5.5\text{V}$   | <b><math>0.7 \times V_{\text{IO}}</math></b> |       |   | V             |
| $V_{\text{OL}}$  | Output Logic Low   | $I_{\text{LOAD}} = 3\text{mA}$   |  |       | <b>400</b>                                    | mV            |
| <b>I<sup>2</sup>C Compatible Timing Specifications (SCL, SDA, VIO, see Figure 4) <sup>(5)(4)</sup></b> |  |  |  |       |   |               |
| $t_1$  | SCL Clock Period   |  | <b>2.5</b>                                   |       |   | $\mu\text{s}$ |
| $t_2$  | Data In Setup Time to SCL High                                   |  | <b>100</b>                                   |       |   | ns            |
| $t_3$  | Data Out Stable After SCL Low                                    |  | <b>0</b>                                     |       |   | ns            |

(3) The matching specification between MAIN and SUB is calculated as  $100 \times ((I_{\text{MAIN}} \text{ or } I_{\text{SUB}}) - I_{\text{AVE}}) / I_{\text{AVE}}$ . This simplifies out to be  $100 \times (I_{\text{MAIN}} - I_{\text{SUB}}) / (I_{\text{MAIN}} + I_{\text{SUB}})$ .

(4) SCL and SDA signals are referenced to VIO and GND for minimum VIO voltage testing. VIO limits indicate the minimum voltage at VIO at which the part is operational.


(5) SCL and SDA must be glitch-free in order for proper brightness control to be realized.

## Electrical Characteristics (continued)

Specifications in standard type face are for  $T_A = 25^\circ\text{C}$  and those in **boldface type** apply over the Operating Temperature Range of  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ . Unless otherwise specified  $V_{IN} = 3.6\text{V}$ ,  $V_{IO} = 1.8\text{V}$ ,  $V_{\overline{\text{RESET}}/\text{GPIO}} = V_{IN}$ ,  $V_{\text{SUB}/\text{FB}} = V_{\text{MAIN}} = 0.5\text{V}$ ,  $R_{\text{SET}} = 12.0\text{k}\Omega$ ,  $\text{OLED} = '0'$ ,  $\text{ENM} = \text{ENS} = '1'$ ,  $\text{BSUB} = \text{BMAIN} = \text{Full Scale}$ .<sup>(1) (2)</sup>

| Symbol | Parameter                                | Conditions | Min        | Typ | Max | Units |
|--------|--|------------|------------|-----|-----|-------|
| $t_4$  | SDA Low Setup Time to SCL Low (Start)    |            | <b>100</b> |     |     | ns    |
| $t_5$  | SDA High Hold Time After SCL High (Stop) |            | <b>100</b> |     |     | ns    |

## Timing Diagram

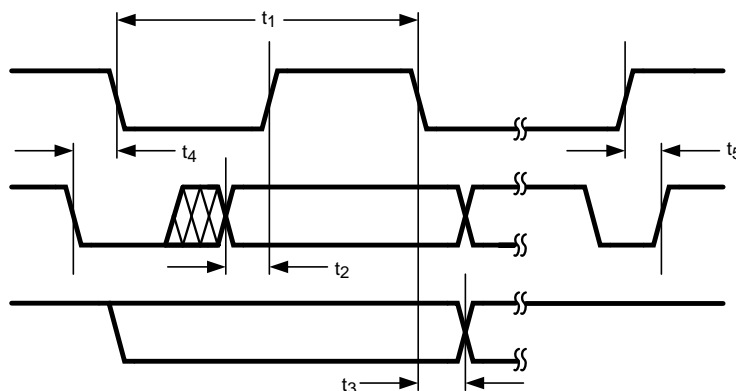

**Figure 4. I<sup>2</sup>C Timing**

## Typical Performance Characteristics

$V_{IN} = 3.6V$ , LEDs are Nichia (NSSW008C),  $C_{OUT} = 1\mu F$  (LED Mode),  $C_{OUT} = 2.2\mu F$  (OLED Mode),  $C_{IN} = 1\mu F$ ,  $L = TDK$  VLF4012AT-100MR79, ( $R_L = 0.3\Omega$ ),  $R_{SET} = 12.1k\Omega$ ,  $UNI = '1'$ ,  $I_{LED} = I_{SUB} + I_{MAIN}$ ,  $T_A = +25^\circ C$  unless otherwise specified.

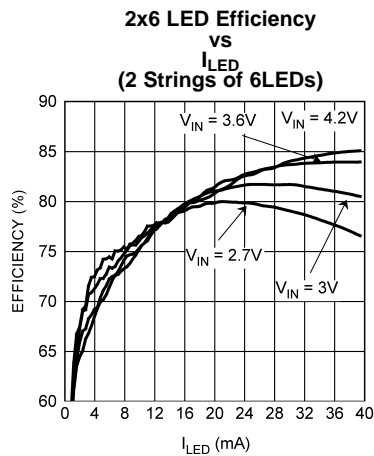


Figure 5.

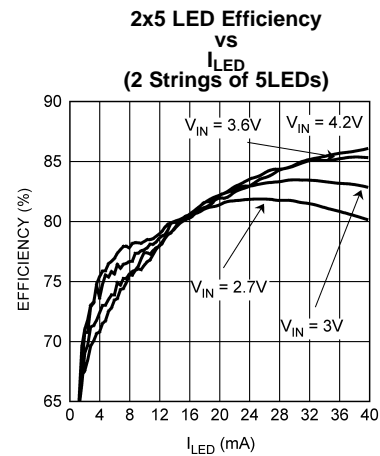


Figure 6.

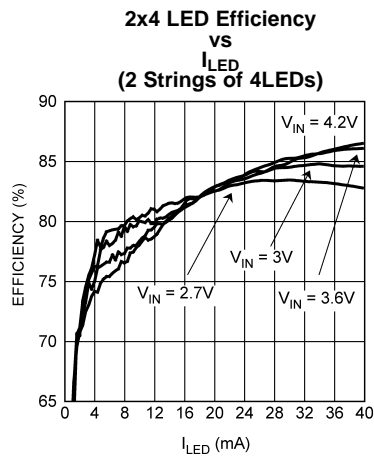


Figure 7.

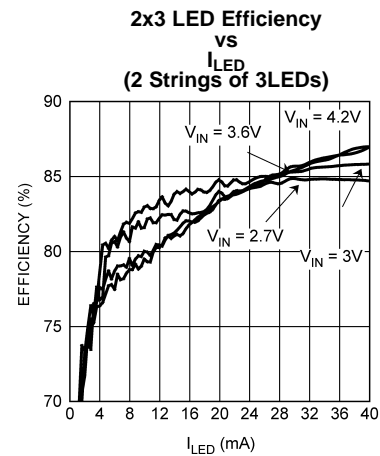


Figure 8.

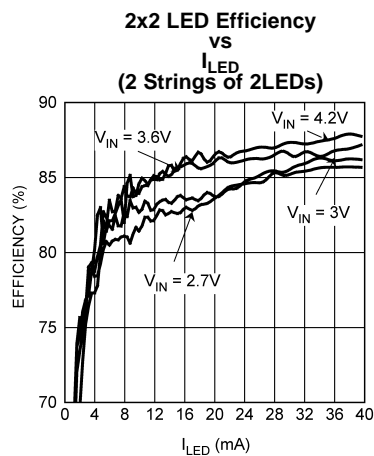


Figure 9.

**LED Efficiency  
vs  
 $V_{IN}$**   
( $L = TDK$  VLF3012AT-100MR92,  $R_L = 0.36\Omega$ ,  $I_{SUB} + I_{MAIN} = 40mA$ )

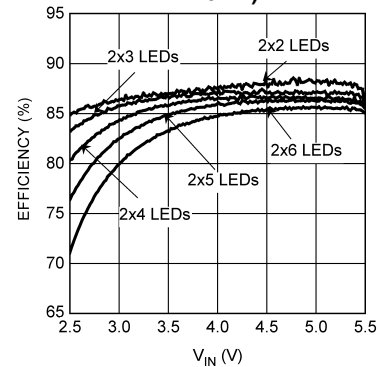


Figure 10.

## Typical Performance Characteristics (continued)

$V_{IN} = 3.6V$ , LEDs are Nichia (NSSW008C),  $C_{OUT} = 1\mu F$  (LED Mode),  $C_{OUT} = 2.2\mu F$  (OLED Mode),  $C_{IN} = 1\mu F$ ,  $L = TDK$  VLF4012AT-100MR79, ( $R_L = 0.3\Omega$ ),  $R_{SET} = 12.1k\Omega$ ,  $UNI = '1'$ ,  $I_{LED} = I_{SUB} + I_{MAIN}$ ,  $T_A = +25^\circ C$  unless otherwise specified.

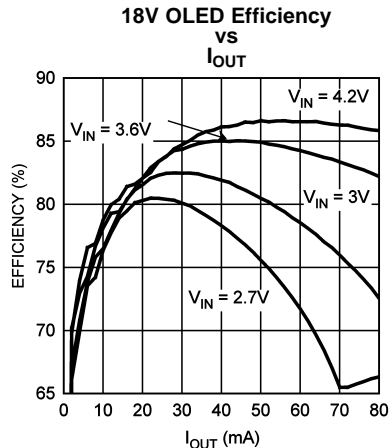


Figure 11.

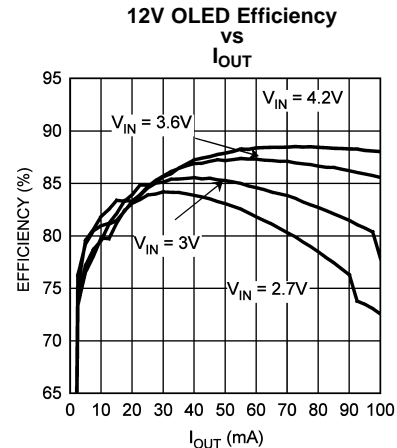


Figure 12.

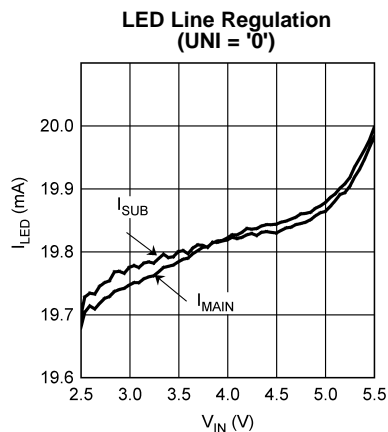


Figure 13.

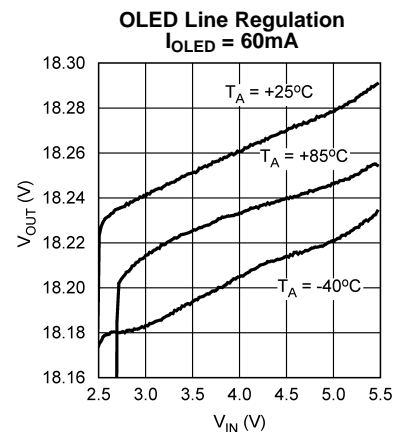


Figure 14.

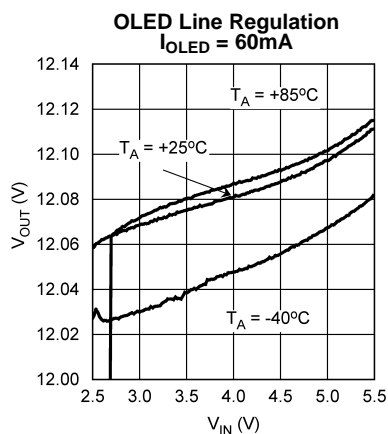


Figure 15.

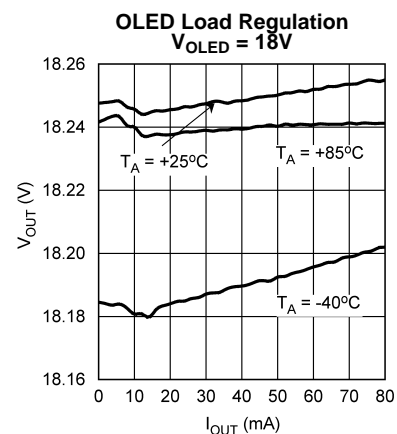


Figure 16.

### Typical Performance Characteristics (continued)

$V_{IN} = 3.6V$ , LEDs are Nichia (NSSW008C),  $C_{OUT} = 1\mu F$  (LED Mode),  $C_{OUT} = 2.2\mu F$  (OLED Mode),  $C_{IN} = 1\mu F$ ,  $L = TDK$  VLF4012AT-100MR79, ( $R_L = 0.3\Omega$ ),  $R_{SET} = 12.1k\Omega$ ,  $UNI = '1'$ ,  $I_{LED} = I_{SUB} + I_{MAIN}$ ,  $T_A = +25^\circ C$  unless otherwise specified.

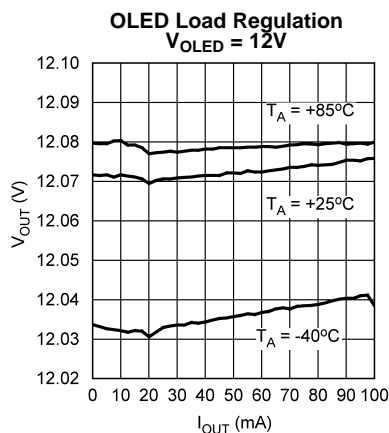


Figure 17.

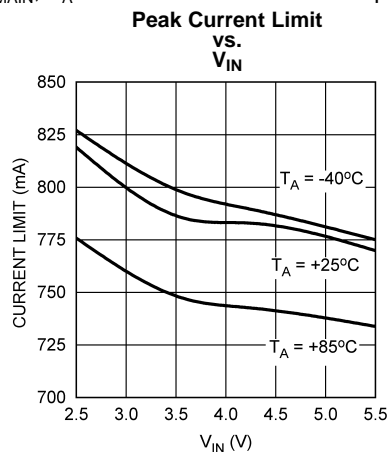


Figure 18.

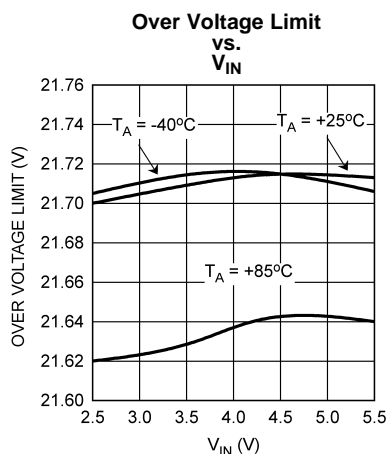


Figure 19.

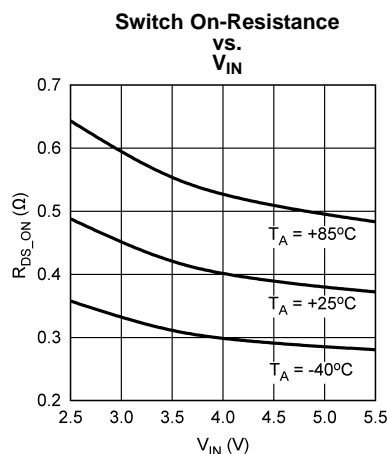


Figure 20.

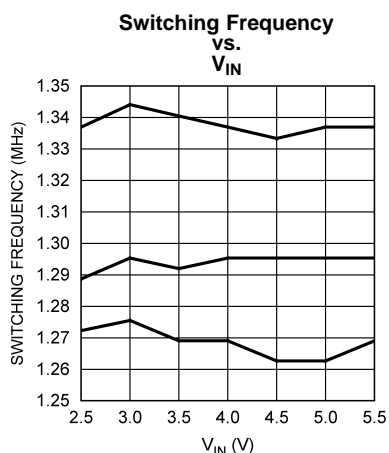


Figure 21.

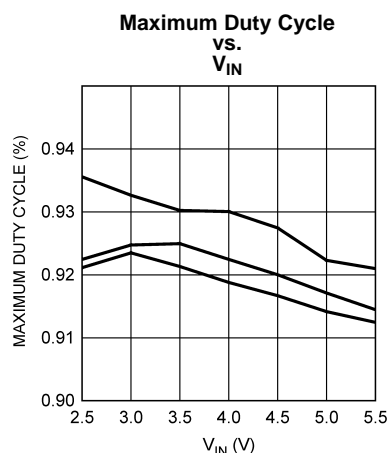


Figure 22.



## Typical Performance Characteristics (continued)

$V_{IN} = 3.6V$ , LEDs are Nichia (NSSW008C),  $C_{OUT} = 1\mu F$  (LED Mode),  $C_{OUT} = 2.2\mu F$  (OLED Mode),  $C_{IN} = 1\mu F$ ,  $L = TDK$  VLF4012AT-100MR79, ( $R_L = 0.3\Omega$ ),  $R_{SET} = 12.1k\Omega$ ,  $UNI = '1'$ ,  $I_{LED} = I_{SUB} + I_{MAIN}$ ,  $T_A = +25^\circ C$  unless otherwise specified.

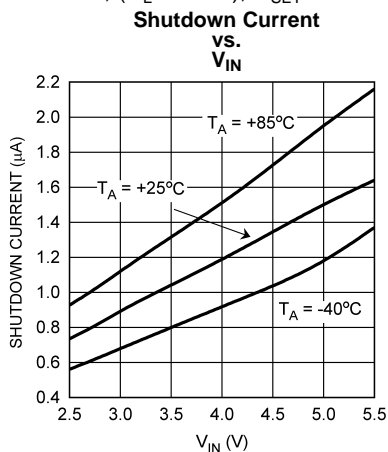


Figure 23.

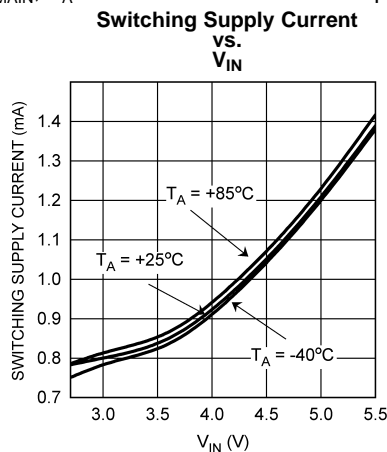


Figure 24.

**LED Current Matching  
vs.  
CODE<sup>(1)</sup>**  
( $UNI = '1'$ ,  $R_{SET} = 12k\Omega$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ )

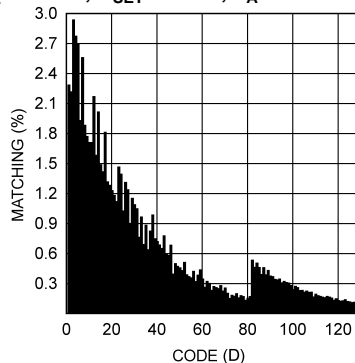


Figure 25.

**LED Current Accuracy  
vs  
CODE**  
( $R_{SET} = 12k\Omega \pm 0.05\%$ )

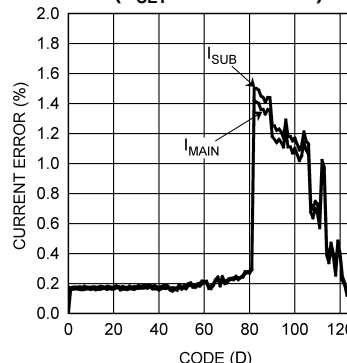


Figure 26.

**LED Current  
vs  
CODE**  
( $I_{MAIN}$ ,  $I_{SUB}$ ,  $I_{IDEAL}$ ,  $R_{SET} = 12k\Omega \pm 0.05\%$ )

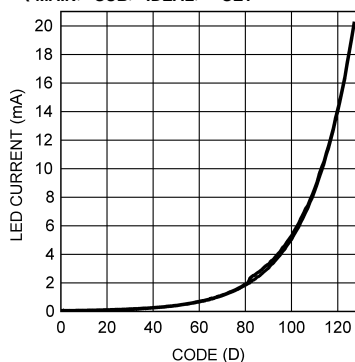


Figure 27.

**$I_{LED}$   
vs  
Current Source Headroom Voltage  
( $V_{IN} = 3V$ ,  $UNI = '0'$ )**

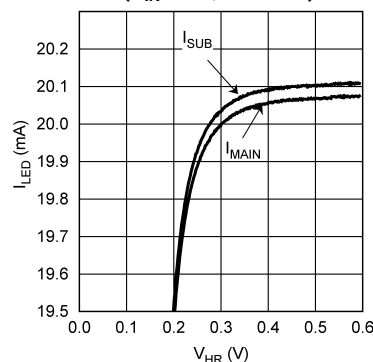



Figure 28.

(1) The matching specification between MAIN and SUB is calculated as  $100 \times ((I_{MAIN} \text{ or } I_{SUB}) - I_{AVE}) / I_{AVE}$ . This simplifies out to be  $100 \times (I_{MAIN} - I_{SUB}) / (I_{MAIN} + I_{SUB})$ .

### Typical Performance Characteristics (continued)

$V_{IN} = 3.6V$ , LEDs are Nichia (NSSW008C),  $C_{OUT} = 1\mu F$  (LED Mode),  $C_{OUT} = 2.2\mu F$  (OLED Mode),  $C_{IN} = 1\mu F$ ,  $L = TDK$  VLF4012AT-100MR79, ( $R_L = 0.3\Omega$ ),  $R_{SET} = 12.1k\Omega$ ,  $UNI = '1'$ ,  $I_{LED} = I_{SUB} + I_{MAIN}$ ,  $T_A = +25^\circ C$  unless otherwise specified.


**Start-Up Waveform (LED Mode)**  
(2 × 5 LEDs, 20mA per string)

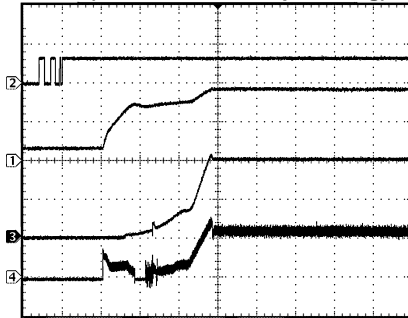

Channel 2: SDA (5V/div)  
Channel 1:  $V_{OUT}$  (10V/div)  
Channel 3:  $I_{LED}$  (20mA/div)  
Channel 4:  $I_{IN}$  (200mA/div)  
Time Base: 400 $\mu s$ /div

Figure 29.


**Start-Up Waveform (OLED Mode)**  
( $V_{OUT} = 18V$ ,  $I_{OUT} = 60mA$ )

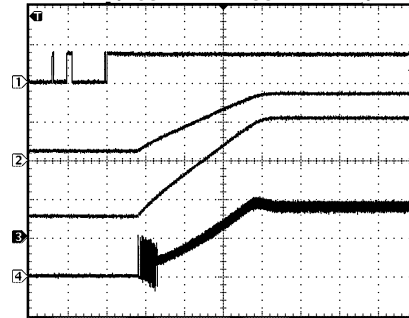

Channel 1: SDA (5V/div)  
Channel 2:  $V_{OUT}$  (10V/div)  
Channel 3:  $I_{OUT}$  (20mA/div)  
Channel 4:  $I_{IN}$  (200mA/div)  
Time Base: 400 $\mu s$ /div

Figure 30.


**Load Step (OLED Mode)**  
( $V_{OUT} = 18V$ ,  $C_{OUT} = 2.2\mu F$ )

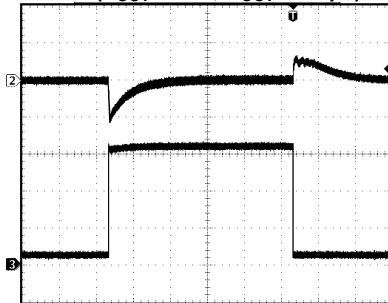

Channel 2:  $V_{OUT}$  (AC Coupled, 500mV/div)  
Channel 3:  $I_{OUT}$  (20mA/div)  
Time Base: 200 $\mu s$ /div

Figure 31.


**Line Step (LED Mode)**  
(2 × 5 LEDs, 20mA per String,  $C_{OUT} = 1\mu F$ ,  $V_{IN}$  from 3V to 3.6V)

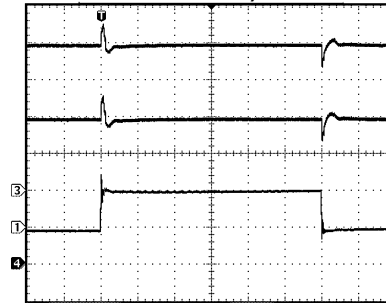

Channel 3:  $I_{SUB}$  (5mA/div)  
Channel 4:  $I_{MAIN}$  (5mA/div)  
Channel 2:  $V_{IN}$  (AC Coupled, 500mV/div)  
Time Base: 100 $\mu s$ /div

Figure 32.


**Line Step (OLED Mode)**  
( $V_{OUT} = 18V$ ,  $C_{OUT} = 2.2\mu F$ ,  $V_{IN}$  from 3V to 3.6V)

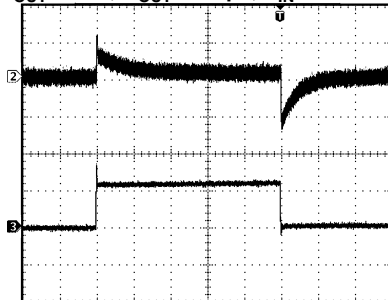

Channel 2:  $V_{OUT}$  (AC Coupled, 100mV/div)  
Channel 3:  $V_{IN}$  (AC Coupled, 500mV/div)  
Time Base: 200 $\mu s$ /div

Figure 33.

**HWEN Functionality**

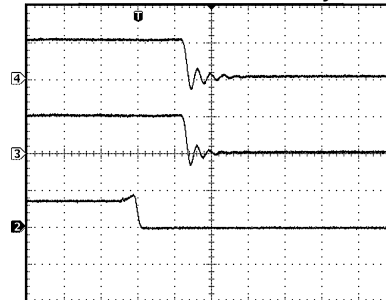


Channel 4:  $I_{SUB}$  (20mA/div)  
Channel 3:  $I_{MAIN}$  (20mA/div)  
Channel 2: HWEN (5V/div)  
Time Base: 200ns/div

Figure 34.

## Typical Performance Characteristics (continued)

$V_{IN} = 3.6V$ , LEDs are Nichia (NSSW008C),  $C_{OUT} = 1\mu F$  (LED Mode),  $C_{OUT} = 2.2\mu F$  (OLED Mode),  $C_{IN} = 1\mu F$ ,  $L = TDK$  VLF4012AT-100MR79, ( $R_L = 0.3\Omega$ ),  $R_{SET} = 12.1k\Omega$ ,  $UNI = '1'$ ,  $I_{LED} = I_{SUB} + I_{MAIN}$ ,  $T_A = +25^\circ C$  unless otherwise specified.


**GPIO1 Functionality**  
(GPIO1 Configured as OUTPUT,  $f_{SCL} = 360kHz$ )

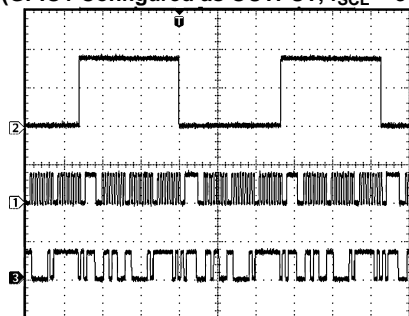

Channel 2: GPIO (2V/div)  
Channel 1: SCL (5V/div)  
Channel 0: SDA (5V/div)  
Time Base: 40µs/div

**Figure 35.**

**Ramp Rate Functionality**  
(RMP1, RMP0 = '11')

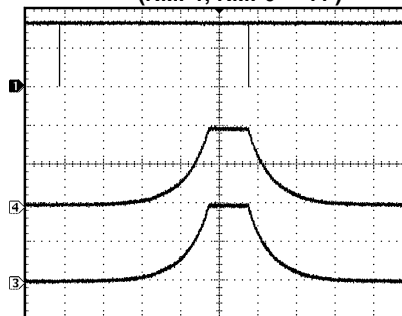

Channel 1: SDA (2V/div)  
Channel 4:  $I_{SUB}$  (10mA/div)  
Channel 3:  $I_{SUB}$  (10mA/div)  
Time Base: 400ms/div

**Figure 36.**

## BLOCK DIAGRAM

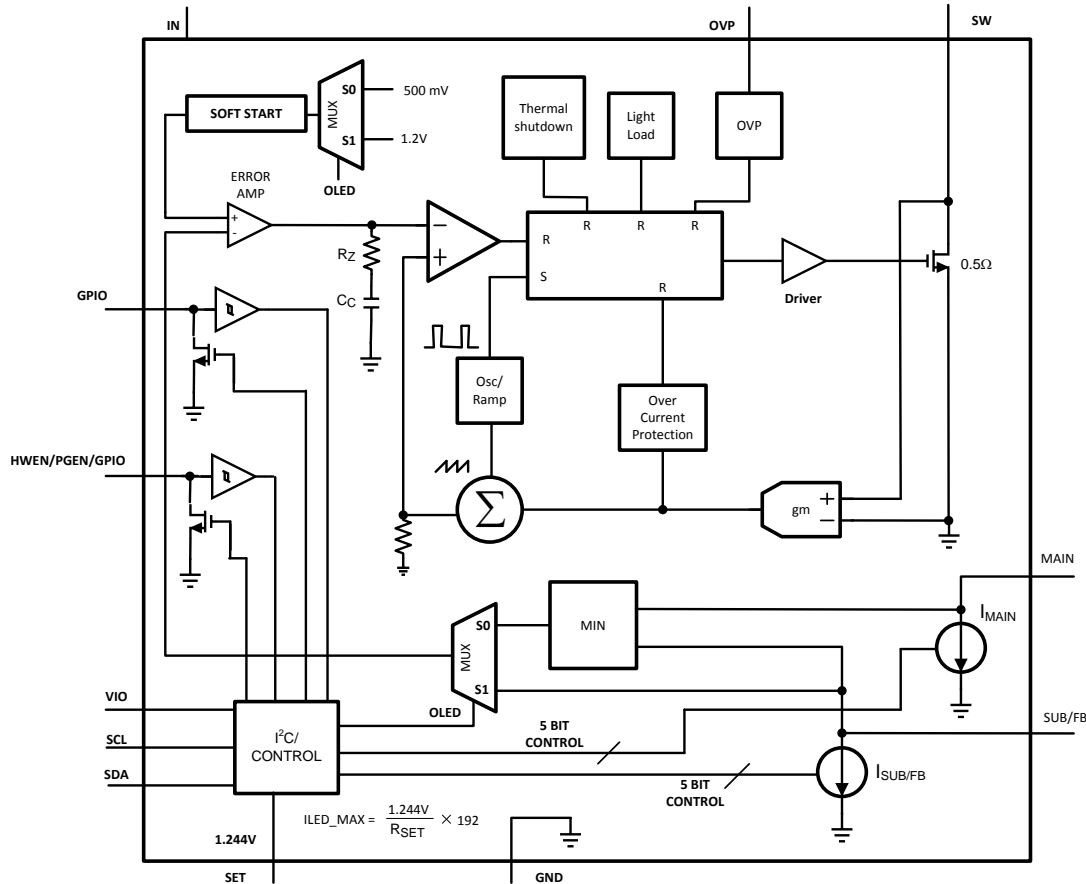


Figure 37. LM3528 Block Diagram

## OPERATION DESCRIPTION

The LM3528 Current Mode PWM boost converter operates from a 2.7V to 5.5V input and provides two regulated outputs for White LED and OLED display biasing. The first output, MAIN, provides a constant current of up to 30mA to bias up to 6 series white LED's. The second output, SUB/FB, can be configured as a current source for up to 6 series white LED's at up to 30mA, or as a feedback voltage pin to regulate a constant output voltage of up to 21V. When both MAIN and SUB/FB are configured for white LED bias the current for each LED string is controlled independently or in unison via an I²C-compatible interface. When MAIN is configured for white LED bias and SUB/FB is configured as a feedback voltage pin, the current into MAIN is controlled via the I²C-compatible interface and SUB/FB becomes the middle tap of a resistive divider used to regulate the output voltage of the boost converter.

The core of the LM3528 is a Current Mode Boost converter. Operation is as follows. At the start of each switching cycle the internal oscillator sets the PWM converter. The converter turns the NMOS switch on, allowing the inductor current to ramp while the output capacitor supplies power to the white LED's and/or OLED panel. The error signal at the output of the error amplifier is compared against the sensed inductor current. When the sensed inductor current equals the error signal, or when the maximum duty cycle is reached, the NMOS switch turns off causing the external Schottky diode to pick up the inductor current. This allows the inductor current to ramp down causing its stored energy to charge the output capacitor and supply power to the load. At the end of the clock period the PWM controller is again set and the process repeats itself.

## Adaptive Regulation

When biasing dual white led strings (White LED mode) the LM3528 maximizes efficiency by adaptively regulating the output voltage. In this configuration the 500mV reference is connected to the non-inverting input of the error amplifier via mux S2 (see [Figure 37](#)). The lowest of either  $V_{MAIN}$  or  $V_{SUB/FB}$  is then applied to the inverting input of the error amplifier via mux S1. This ensures that  $V_{MAIN}$  and  $V_{SUB/FB}$  are at least 500mV, thus providing enough voltage headroom at the input to the current sinks for proper current regulation.

In the instance when there are unequal numbers of LEDs or unequal currents from string to string, the string with the highest voltage will be the regulation point.

## Unison/Non-Unison Mode

Within White LED mode there are two separate modes of operation, Unison and Non-Unison. Non-Unison mode provides for independent current regulation, while Unison mode gives up independent regulation for more accurate matching between LED strings. When in Non-Unison mode the LED currents  $I_{MAIN}$  and  $I_{SUB/FB}$  are independently controlled via registers BMAIN and BSUB respectively (see [Brightness Registers \(BMAIN and BSUB\)](#) section). When in Unison mode BSUB is disabled and both  $I_{MAIN}$  and  $I_{SUB/FB}$  are controlled via BMAIN only.

## Start-Up

The LM3528 features an internal soft-start, preventing large inrush currents during start-up that can cause excessive voltage ripple on the input. For the typical application circuits when the device is brought out of shutdown the average input current ramps from zero to 450mA in approximately 1.2ms. See Start Up Plots in the [Typical Performance Characteristics](#).

## OLED Mode

When the LM3528 is configured for a single White LED bias + OLED display bias (OLED mode), the non-inverting input of the error amplifier is connected to the internal 1.21V reference via MUX S2. MUX S1 switches SUB/FB to the inverting input of the error amplifier while disconnecting the internal current sink at SUB/FB. The voltage at MAIN is not regulated in OLED mode so when the application requires white LED + OLED panel biasing, ensure that at least 300mV of headroom is maintained at MAIN to ensure proper regulation of  $I_{MAIN}$ . (see the [Typical Performance Characteristics](#) for a plot of  $I_{LED}$  vs Current Source Headroom Voltage)

## Peak Current Limit

The LM3528's boost converter has a peak current limit for the internal power switch of 770mA typical (650mA minimum). When the peak switch current reaches the current limit the duty cycle is terminated resulting in a limit on the maximum output current and thus the maximum output power the LM3528 can deliver. Calculate the maximum LED current as a function of  $V_{IN}$ ,  $V_{OUT}$ , L and  $I_{PEAK}$  as:

$$I_{OUT\_MAX} = \frac{(I_{PEAK} - \Delta I_L) \times \eta \times V_{IN}}{V_{OUT}}$$

$$\text{where } \Delta I_L = \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2 \times f_{SW} \times L \times V_{OUT}}$$

(1)

$f_{SW} = 1.27\text{MHz}$ . Typical values for efficiency and  $I_{PEAK}$  can be found in the efficiency and  $I_{PEAK}$  curves in the [Typical Performance Characteristics](#).

## Over Voltage Protection

The LM3528's output voltage ( $V_{OUT}$ ) is limited on the high end by the Output Over-Voltage Protection Threshold ( $V_{OVP}$ ) of 21.2V (min). In White LED mode during output open circuit conditions the output voltage will rise to the over voltage protection threshold. When this happens the controller will stop switching causing  $V_{OUT}$  to droop. When the output voltage drops below 19.7V (min) the device will resume switching. If the device remains in an over voltage condition the LM3528 will repeat the cycle causing the output to cycle between the high and low OVP thresholds. See waveform for OVP condition in the [Typical Performance Characteristics](#).

## Output Current Accuracy and Current Matching

The LM3528 provides both precise current accuracy (% error from ideal value) and accurate current matching between the MAIN and SUB/FB current sinks. Two modes of operation affect the current matching between  $I_{\text{MAIN}}$  and  $I_{\text{SUB/FB}}$ . The first mode (Non-Unison mode) is set by writing a 0 to bit 2 of the General Purpose register (UNI bit). Non-Unison mode allows for independent programming of  $I_{\text{MAIN}}$  and  $I_{\text{SUB/FB}}$  via registers BMAIN and BSUB respectively. In this mode typical matching between current sinks is 1%.

Writing a 1 to UNI configures the device for Unison mode. In Unison mode, BSUB is disabled and  $I_{\text{MAIN}}$  and  $I_{\text{SUB/FB}}$  are both controlled via register BMAIN. In this mode typical matching is 0.15%.

## Light Load Operation

The LM3528 boost converter operates in three modes; continuous conduction, discontinuous conduction, and skip mode operation. Under heavy loads when the inductor current does not reach zero before the end of the switching period the device switches at a constant frequency. As the output current decreases and the inductor current reaches zero before the end of the switching cycle, the device operates in discontinuous conduction. At very light loads the LM3528 will enter skip mode operation causing the switching period to lengthen and the device to only switch as required to maintain regulation at the output.

## Hardware Enable/Pattern Generator/General Purpose I/O (HWEN/PGEN/GPIO)

HWEN/PGEN/GPIO can be configured for three different modes of operation; Hardware Enable, Pattern Generation, and General Purpose I/O. Register HPG at address 0x80 controls the functionality of this pin (see [Table 6](#)).

### Hardware Enable (HWEN)

On initial power-up HWEN/PGEN/GPIO defaults to the Hardware Enable (HWEN) state. In this mode HWEN/PGEN/GPIO is an active high open-drain input enable to the device. When in HWEN mode HWEN/PGEN/GPIO must be pulled up to at least  $0.7 \times V_{\text{IO}}$  to enable the device. In HWEN mode pulling HWEN/PGEN/GPIO below  $0.36 \times V_{\text{IO}}$  will shutdown the LM3528, resetting all registers, and forcing MAIN, SUB/FB, and SW high impedance. Bit 0 of the HPG register controls the HWEN function. Writing a '0' to this bit enables the HWEN mode. Writing a '1' to this bit disables the HWEN mode and allows selection between the other two modes.

### Pattern Generator (PGEN)

With bit 0 of the HPG register set to 1, HWEN/PGEN/GPIO can be programmed as an open drain Pattern Generator Output (PGEN). In PGEN mode a 32 bit pattern is output at HWEN/PGEN/GPIO. This pattern can be programmed to repeat itself at 4 different frequencies and 6 different duty cycles. The arbitrary pattern is programmed into four 8 bit registers; PGEN0 (address 0x90), PGEN1 (address 0x91), PGEN2 (address 0x92), and PGEN3 (address 0x93) (see [Figure 47](#) - [Figure 50](#)). [Figure 51](#) details an example of a 32 bit pattern at a specific programmed duty cycle and frequency. A '1' written to the PGEN\_ registers forces HWEN/PGEN/GPIO low. A '0' causes HWEN/PGEN/GPIO to go open drain.

Bits <5:3> in the HPG register have three functions; GPIO enable, duty cycle select, and pattern latch. Any combination of these bits other than '000' or '111' puts HWEN/PGEN/GPIO into PGEN mode at the specified duty cycle shown in [Table 6](#). Writing a '111' to bits <5:3> latches the 32 bit pattern programmed into the 4 pattern generator registers PGEN0, PGEN1, PGEN2, PGEN3 into the internal shift register. When bits <5:3> = '000' the PGEN mode is off and HWEN/PGEN/GPIO is configured as a GPIO.

Bits <7:6> of the HPG register control the pattern frequency. See [Table 6](#) for the detailed breakdown of each available frequency. [Figure 51](#) details the pattern programming and [Figure 52](#) shows the pattern output at HWEN/PGEN/GPIO.

### General Purpose I/O (GPIO1)

With bits <5:3> and bit 0 of the HPG register all set to '0' HWEN/PGEN/GPIO functions as an open drain General Purpose I/O. In this mode, bit 1 of the HPG register controls the logic direction (Input or Output) and bit 2 holds the logic data. With bit 1 set to '0' HWEN/PGEN/GPIO is configured as an output. In this mode a '0' written to bit 2 forces HWEN/PGEN/GPIO to logic low. Likewise, a '1' written to bit 2 will force HWEN/PGEN/GPIO open drain. When bit 1 is set to '1' HWEN/PGEN/GPIO is configured as a logic input. In this

mode when HWEN/PGEN/GPIO is externally pulled low a '0' is written to bit 2 of the HPG register. Likewise, when HWEN/PGEN/GPIO is externally pulled high a '1' is written to bit 2 of the HPG register. [Table 6](#) and [Figure 45](#) detail the bit functions of the HPG register and their power-on-reset values. Note that the logic output levels for the GPIO function of this pin are inverted compared to the PGEN functions. For example, a 1 written to the PGEN registers cause the HWEN/PGEN/GPIO pin to pull low while a 1 written to bit 2 of the HPG register causes the pin to go open drain.

## General Purpose I/O (GPIO)

The GPIO pin is a dedicated General Purpose I/O (open drain) and is controlled via the GPIO register at address 0x81. Bit 1 holds the logic data while bit 0 controls the logic direction (Input or Output). Bits <7:2> are un-used and will always read back as logic '1'. With bit 0 set to '0' GPIO is configured as an output. In this mode a '0' written to bit 1 forces GPIO to a logic low. Likewise, a '1' written to bit 1 will force GPIO to logic high. When bit 0 is set to '1' GPIO is configured as a logic input. In this mode when GPIO is externally pulled low a '0' is written to bit 1 of the GPIO register. Likewise, when GPIO is externally pulled high a '1' is written to bit 2 of the HPG register. [Table 8](#) and [Figure 46](#) detail the bit functions and power-on-reset values of GPIO.

During an initial GPIO write two I2C sequences (Slave I.D, Register Address, Register Data) are required to change the state of the GPIO pin. The first write configures the GPIO pin as an output. The second write will change the state of the GPIO output to the desired logic '1' or '0'.

## Thermal Shutdown

The LM3528 offers a thermal shutdown protection. When the die temperature reaches +140°C the device will shutdown and not turn on again until the die temperature falls below +120°C.

## I<sup>2</sup>C Compatible Interface

The LM3528 is controlled via an I<sup>2</sup>C-compatible interface. START and STOP conditions classify the beginning and the end of the I<sup>2</sup>C session. A START condition is defined as SDA transitioning from HIGH to LOW while SCL is HIGH. A STOP condition is defined as SDA transitioning from LOW to HIGH while SCL is HIGH. The I<sup>2</sup>C master always generates START and STOP conditions. The I<sup>2</sup>C bus is considered busy after a START condition and free after a STOP condition. During data transmission, the I<sup>2</sup>C master can generate repeated START conditions. A START and a repeated START conditions are equivalent function-wise. The data on SDA must be stable during the HIGH period of the clock signal (SCL). In other words, the state of SDA can only be changed when SCL is LOW.


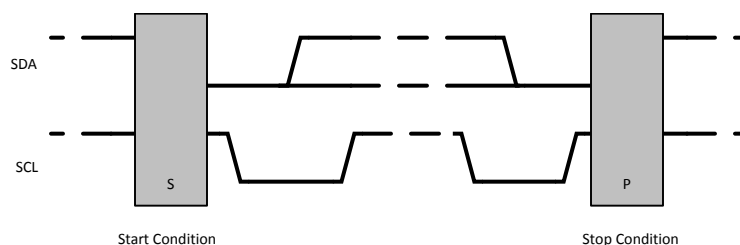


Figure 38. Start and Stop Sequences

## I<sup>2</sup>C Compatible Address


The chip address for the LM3528 is 0110110 (36h). After the START condition, the I<sup>2</sup>C master sends the 7-bit chip address followed by a read or write bit (R/W). R/W= 0 indicates a WRITE and R/W = 1 indicates a READ. The second byte following the chip address selects the register address to which the data will be written. The third byte contains the data for the selected register.

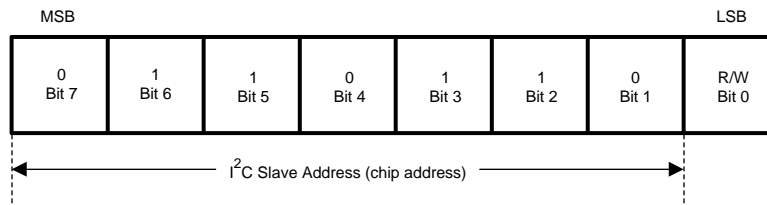

**Figure 39. Chip Address**

## Transferring Data

Every byte on the SDA line must be eight bits long, with the most significant bit (MSB) transferred first. Each byte of data must be followed by an acknowledge bit (ACK). The acknowledge related clock pulse (9th clock pulse) is generated by the master. The master releases SDA (HIGH) during the 9th clock pulse. The LM3528 pulls down SDA during the 9th clock pulse, signifying an acknowledge. An acknowledge is generated after each byte has been received. [Figure 40](#) is an example of a write sequence to the General Purpose register of the LM3528.

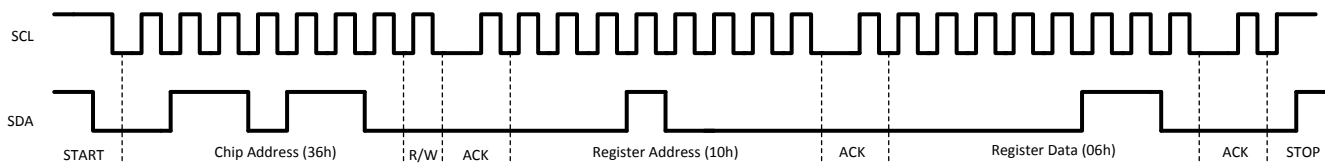**Figure 40. Write Sequence to the LM3528**

## Register Descriptions

There are 4, 8 bit registers within the LM3528 as detailed in Table 1.


**Table 1. LM3528 Register Descriptions**

| Register Name                      | Hex Address | Power -On-Value |
|------------------------------------|-------------|-----------------|
| General Purpose (GP)               | 0x10        | 0xC0            |
| Brightness Main (BMAIN)            | 0xA0        | 0x80            |
| Brightness Sub (BSUB)              | 0xB0        | 0x80            |
| HWEN/PGEN/GPIO Control (HPG)       | 0x80        | 0XF8            |
| General Purpose I/O Control (GPIO) | 0x81        | 0xFC            |
| Pattern Register 0 (PGEN0)         | 0x90        | 0x00            |
| Pattern Register 1 (PGEN1)         | 0x91        | 0x00            |
| Pattern Register 2 (PGEN2)         | 0x92        | 0x00            |
| Pattern Register 3 (PGEN3)         | 0x93        | 0x00            |

## General Purpose Register (GP)

The General Purpose register has four functions. It controls the on/off state of MAIN and SUB/FB, it selects between Unison or Non-Unison mode, provides for control over the rate of change of the LED current (see [Brightness Rate of Change Description](#)), and selects between White LED and OLED mode. [Figure 41](#) and [Table 2](#) describes each bit available within the General Purpose Register. Table 3 summarizes the output state of the LM3528 for the different combinations of General Purpose register settings.

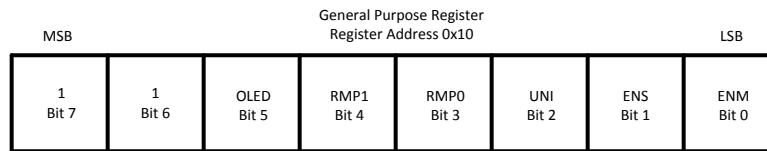


**Figure 41. General Purpose Register Description**
**Table 2. General Purpose Register Bit Function**

| Bit | Name       | Function   | Power-On-Value |
|-----|------------|--|----------------|
| 0   | ENM        | Enable MAIN. Writing a 1 to this bit enables the main current sink (MAIN). Writing a 0 to this bit disables the main current sink and forces MAIN high impedance.  | 0              |
| 1   | ENS        | Enable SUB/FB. Writing a 1 to this bit enables the secondary current sink (SUB/FB). Writing a 0 to this bit disables the secondary current sink and forces SUB/FB high impedance.  | 0              |
| 2   | UNI        | Unison Mode Select. Writing a 1 to this bit disables the BSUB register and causes the contents of BMAIN to set the current in both the MAIN and SUB/FB current sinks. Writing a 0 to this bit allows the current into MAIN and SUB/FB to be independently controlled via the BMAIN and BSUB registers respectively.  | 0              |
| 3   | RMP0       | Brightness Rate of Change. Bits RMP0 and RMP1 set the rate of change of the LED current into MAIN and SUB/FB in response to changes in the contents of registers BMAIN and BSUB (see <a href="#">Brightness Rate of Change Description</a> ).  | 0              |
| 4   | RMP1       |  | 0              |
| 5   | OLED       | OLED = 0 places the LM3528 in White LED mode. In this mode both the MAIN and SUB/FB current sinks are active. The boost converter ensures there is at least 500mV at V <sub>MAIN</sub> and V <sub>SUB/FB</sub> . OLED = 1 places the LM3528 in OLED mode. In this mode the boost converter regulates V <sub>SUB/FB</sub> to 1.244V. V <sub>MAIN</sub> is unregulated and must be > 400mV for the MAIN current sink to maintain current regulation. | 0              |
| 6   | Don't Care | These are non-functional read only bits. They will always read back as a 1.  | 1              |
| 7   |            |  |                |

**Table 3. Operational Truth Table**

| UNI | OLED | ENM | ENS | Result   |
|-----|------|-----|-----|--|
| X   | 0    | 0   | 0   | LM3528 Disabled  |
| 1   | 0    | 1   | X   | MAIN and SUB/FB current sinks enabled. Current levels set by contents of BMAIN.  |
| 1   | 0    | 0   | X   | MAIN and SUB/FB Disabled   |
| 0   | 0    | 0   | 1   | SUB/FB current sink enabled. Current level set by BSUB.  |
| 0   | 0    | 1   | 0   | MAIN current sink enabled. Current level set by BMAIN.   |
| 0   | 0    | 1   | 1   | MAIN and SUB/FB current sinks enabled. Current levels set by contents of BMAIN and BSUB respectively.                        |
| X   | 1    | 1   | X   | SUB/FB current sink disabled (SUB/FB configured as a feedback pin).<br>MAIN current sink enabled current level set by BMAIN. |
| X   | 1    | 0   | X   | SUB/FB current sink disabled (SUB/FB configured as a feedback pin).<br>MAIN current sink disabled.                           |

\* ENM ,ENS, or OLED high enables analog circuitry.

## Brightness Registers (BMAIN and BSUB)

With the UNI bit (General Purpose register) set to 0 (Non-Unison mode) both brightness registers (BMAIN and BSUB) independently control the LED currents I<sub>MAIN</sub> and I<sub>SUB/FB</sub> respectively. BMAIN and BSUB are both 8 bit, but with only the 7 LSB's controlling the current. The MSB's is a don't care. The LED current control is designed to approximate an exponentially increasing response of the LED current vs increasing code in either BMAIN or BSUB (see [Figure 44](#)). Program I<sub>LED\_MAX</sub> by connecting a resistor (RSET) from SET to GND, where:

$$I_{LED\_MAX} = 192 \times \frac{1.244V}{R_{SET}} \quad (2)$$

With the UNI bit (General Purpose register) set to 1 (Unison mode), BSUB is disabled and BMAIN sets both  $I_{MAIN}$  and  $I_{SUB/FB}$ . This prevents the independent control of  $I_{MAIN}$  and  $I_{SUB/FB}$ , however matching between current sinks goes from typically 1% (with UNI = 0) to typically 0.15% (with UNI = 1). Figure 42 and Figure 43 show the register descriptions for the Brightness MAIN and Brightness SUB registers. Table 4 and Figure 44 show  $I_{MAIN}$  and/or  $I_{SUB/FB}$  vs. brightness data as a percentage of  $I_{LED\_MAX}$ .

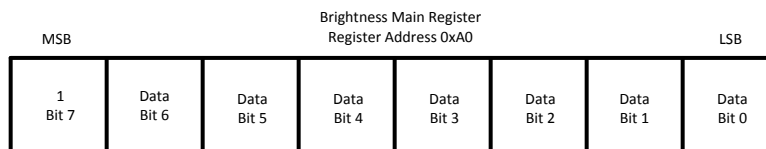


Figure 42. Brightness MAIN Register Description

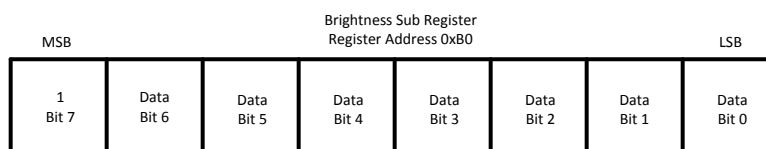


Figure 43. Brightness SUB Register Description

Table 4.  $I_{LED}$  vs. Brightness Register Data

| BMAIN or<br>BSUB<br>Brightness<br>Data | % of<br>$I_{LED\_MAX}$ | BMAIN or BSUB<br>Brightness Data | % of $I_{LED\_MAX}$ | BMAIN or BSUB<br>Brightness Data | % of $I_{LED\_MAX}$ | BMAIN or<br>BSUB<br>Brightness<br>Data | % of $I_{LED\_MAX}$ |
|--|------------------------|----------------------------------|---------------------|----------------------------------|---------------------|--|---------------------|
| 0000000                                | 0.000%                 | 0100000                          | 0.803%              | 1000000                          | 4.078%              | 1100000                                | 20.713%             |
| 0000001                                | 0.166%                 | 0100001                          | 0.845%              | 1000001                          | 4.290%              | 1100001                                | 21.792%             |
| 0000010                                | 0.175%                 | 0100010                          | 0.889%              | 1000010                          | 4.514%              | 1100010                                | 22.928%             |
| 0000011                                | 0.184%                 | 0100011                          | 0.935%              | 1000011                          | 4.749%              | 1100011                                | 24.122%             |
| 0000100                                | 0.194%                 | 0100100                          | 0.984%              | 1000100                          | 4.996%              | 1100100                                | 25.379%             |
| 0000101                                | 0.204%                 | 0100101                          | 1.035%              | 1000101                          | 5.257%              | 1100101                                | 26.701%             |
| 0000110                                | 0.214%                 | 0100110                          | 1.089%              | 1000110                          | 5.531%              | 1100110                                | 28.092%             |
| 0000111                                | 0.226%                 | 0100111                          | 1.146%              | 1000111                          | 5.819%              | 1100111                                | 29.556%             |
| 0001000                                | 0.237%                 | 0101000                          | 1.205%              | 1001000                          | 6.122%              | 1101000                                | 31.096%             |
| 0001001                                | 0.250%                 | 0101001                          | 1.268%              | 1001001                          | 6.441%              | 1101001                                | 32.716%             |
| 0001010                                | 0.263%                 | 0101010                          | 1.334%              | 1001010                          | 6.776%              | 1101010                                | 34.420%             |
| 0001011                                | 0.276%                 | 0101011                          | 1.404%              | 1001011                          | 7.129%              | 1101011                                | 36.213%             |
| 0001100                                | 0.291%                 | 0101100                          | 1.477%              | 1001100                          | 7.501%              | 1101100                                | 38.100%             |
| 0001101                                | 0.306%                 | 0101101                          | 1.554%              | 1001101                          | 7.892%              | 1101101                                | 40.085%             |
| 0001110                                | 0.322%                 | 0101110                          | 1.635%              | 1001110                          | 8.303%              | 1101110                                | 42.173%             |
| 0001111                                | 0.339%                 | 0101111                          | 1.720%              | 1001111                          | 8.735%              | 1101111                                | 44.371%             |
| 0010000                                | 0.356%                 | 0110000                          | 1.809%              | 1010000                          | 9.191%              | 1110000                                | 46.682%             |
| 0010001                                | 0.375%                 | 0110001                          | 1.904%              | 1010001                          | 9.669%              | 1110001                                | 49.114%             |
| 0010010                                | 0.394%                 | 0110010                          | 2.003%              | 1010010                          | 10.173%             | 1110010                                | 51.673%             |
| 0010011                                | 0.415%                 | 0110011                          | 2.107%              | 1010011                          | 10.703%             | 1110011                                | 54.365%             |
| 0010100                                | 0.436%                 | 0110100                          | 2.217%              | 1010100                          | 11.261%             | 1110100                                | 57.198%             |
| 0010101                                | 0.459%                 | 0110101                          | 2.332%              | 1010101                          | 11.847%             | 1110101                                | 60.178%             |
| 0010110                                | 0.483%                 | 0110110                          | 2.454%              | 1010110                          | 12.465%             | 1110110                                | 63.313%             |
| 0010111                                | 0.508%                 | 0110111                          | 2.582%              | 1010111                          | 13.114%             | 1110111                                | 66.611%             |
| 0011000                                | 0.535%                 | 0110111                          | 2.716%              | 1011000                          | 13.797%             | 1111000                                | 70.082%             |

Table 4.  $I_{LED}$  vs. Brightness Register Data (continued)

| BMAIN or<br>BSUB<br>Brightness<br>Data | % of<br>$I_{LED\_MAX}$ | BMAIN or BSUB<br>Brightness Data | % of $I_{LED\_MAX}$ | BMAIN or BSUB<br>Brightness Data | % of $I_{LED\_MAX}$ | BMAIN or<br>BSUB<br>Brightness<br>Data | % of $I_{LED\_MAX}$ |
|--|------------------------|----------------------------------|---------------------|----------------------------------|---------------------|--|---------------------|
| 0011001                                | 0.563%                 | 0111000                          | 2.858%              | 1011001                          | 14.516%             | 1111001                                | 73.733%             |
| 0011010                                | 0.592%                 | 0111001                          | 3.007%              | 1011010                          | 15.272%             | 1111010                                | 77.574%             |
| 0011011                                | 0.623%                 | 0111010                          | 3.163%              | 1011011                          | 16.068%             | 1111011                                | 81.616%             |
| 0011100                                | 0.655%                 | 0111011                          | 3.328%              | 1011100                          | 16.905%             | 1111100                                | 85.868%             |
| 0011101                                | 0.689%                 | 0111100                          | 3.502%              | 1011101                          | 17.786%             | 1111101                                | 90.341%             |
| 0011110                                | 0.725%                 | 0111101                          | 3.684%              | 1011110                          | 18.713%             | 1111110                                | 95.048%             |
| 0011111                                | 0.763%                 | 0111111                          | 3.876%              | 1011111                          | 19.687%             | 1111111                                | 100.000%            |

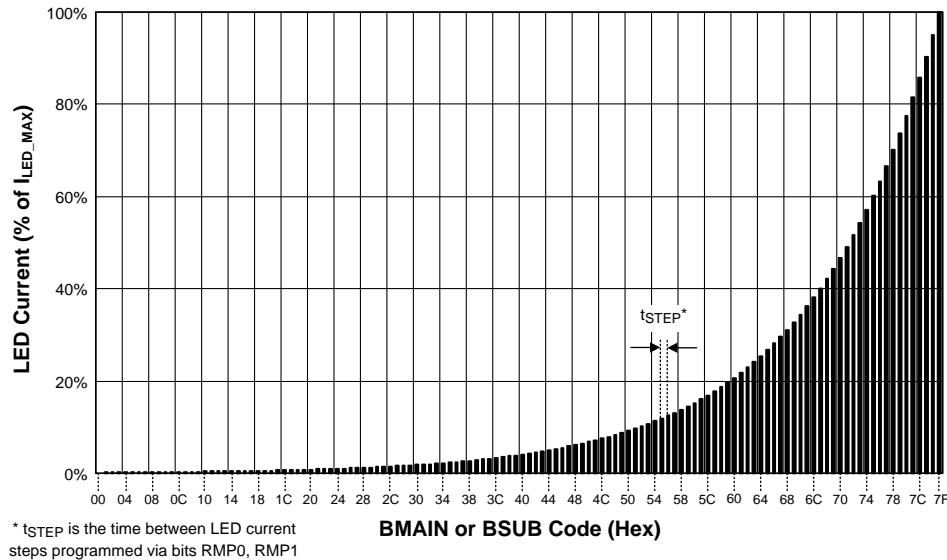


Figure 44.  $I_{MAIN}$  or  $I_{SUB}$  vs BMAIN or BSUB Data

### Brightness Rate of Change Description

RMP0 and RMP1 control the rate of change of the LED current  $I_{MAIN}$  and  $I_{SUB/FB}$  in response to changes in BMAIN and/or BSUB. There are 4 user programmable LED current rates of change settings for the LM3528 (see Table 5).

Table 5. Rate of Change Bits

| RMP0 | RMP1 | Change Rate ( $t_{STEP}$ ) |
|------|------|----------------------------|
| 0    | 0    | 12.75 $\mu$ s/step         |
| 0    | 1    | 3.25ms/step                |
| 1    | 0    | 6.5ms/step                 |
| 1    | 1    | 13ms/step                  |

For example, if  $R_{SET} = 12.1k\Omega$  then  $I_{LED\_MAX} = 20mA$ . With the contents of BMAIN set to 0x7F ( $I_{MAIN} = 20mA$ ), suppose the contents of BMAIN are changed to 0x00 resulting in ( $I_{MAIN} = 0mA$ ). With RMP0 = 1 and RMP1 = 1 (13ms/step),  $I_{MAIN}$  will change from 20mA to 0mA in 127 steps with 13ms elapsing between steps, excluding the step from 0x7F to 0x7E, resulting in a full scale current change in 1638ms. The total time to transition from one brightness code to another is:

$$t_{transition} = (|InitialCode - FinalCode| - 1) \times t_{STEP} \quad (3)$$

The following 3 additional examples detail possible scenarios when using the brightness register in conjunction with the rate of change bits and the enable bits.

**Example 1:**

Step 1: Write to BMAIN a value corresponding to  $I_{MAIN} = 20\text{mA}$ .

Step 2: Write 1 to ENM (turning on MAIN)

Step 3:  $I_{MAIN}$  ramps to 20mA with a rate set by RMP0 and RMP1. (RMP0 and RMP1 bits set the duration spent at one brightness code before incrementing to the next).

Step 4: ENM is set to 0 before 20mA is reached, thus the LED current fades off at a rate given by RMP0 and RMP1 without  $I_{MAIN}$  going up to 20mA.

**Example 2:**

Step 1: ENM is 1, and BMAIN has been programmed with code 0x01. This results in a small current into MAIN.

Step 2: BMAIN is programmed with 0x7F (full scale current). This causes  $I_{MAIN}$  to ramp toward full-scale at the rate selected by RMP0 and RMP1.

Step 3: Before  $I_{MAIN}$  reaches full-scale BMAIN is programmed with 0x30.  $I_{MAIN}$  will continue to ramp to full scale.

Step 4: When  $I_{MAIN}$  has reached full-scale value it will ramp down to the current corresponding to 0x30 at a rate set by RMP0 and RMP1.

**Example 3:**

Step 1: Write to BMAIN a value corresponding to  $I_{MAIN} = 20\text{mA}$ .

Step 2: Write a 1 to both RMP0 and RMP1.

Step 3: Write 1 to ENM (turning on MAIN).

Step 4:  $I_{MAIN}$  ramps toward 20mA with a rate set by RMP0 and RMP1. (RMP0 and RMP1 bits set the duration spent at one brightness code before incrementing to the next).


Step 5: After 1.222s  $I_{MAIN}$  has ramped to 19.687% of  $I_{LED\_MAX}$  ( $0.19687 \times 20\text{mA} = 3.9374\text{mA}$ ). Simultaneously, RMP0 and RMP1 are both programmed with 0.

Step 6:  $I_{MAIN}$  continues ramping from 3.9374mA to 20mA, but at a new ramp rate of 12.75 $\mu\text{s}/\text{step}$ .


**Table 6. HPG Register Function**

| Bits 7 – 6<br>(PGEN Bit Period)  | Bits 5 - 3 (PGEN Enable/Disable and Duty Cycle Selection)  | Bit 2<br>(GPIO Data) | Bit 1 (GPIO Data Direction) | Bit 0<br>(HWEN Control) | Function  |
|--|--|----------------------|-----------------------------|-------------------------|---|
| X  | X  | X                    | X                           | 0                       | HWEN/PGEN/GPIO is configured as an active high Hardware Enable Input (HWEN)   |
| 00 = 1.6μs/bit (625kHz)<br>01 = 26ms/bit (38Hz)<br>10 = 52ms/bit (19Hz)<br>11 = 105ms/bit (9.5Hz)<br>(1) | 001 = 100%<br>010 = 1/2<br>011 = 1/3<br>100 = 1/4<br>101 = 1/6<br>110 = 1/12<br>111 = Latch Pattern Into Shift Register<br>(2) | X                    | X                           | 1                       | HWEN/PGEN/GPIO is configured as a Pattern Generator Output with the frequency set by bits <7:6> and the duty cycle set by bits <5:3>. (See <a href="#">Figure 46.</a> ) |
| X  | 000  | GPIO Read Data       | 1                           | 1                       | HWEN/PGEN/GPIO is configured as a GPIO Input. Read data from bit 2.   |
| X  | 000  | GPIO Write Data      | 0                           | 1                       | HWEN/PGEN/GPIO is configured as a GPIO Output. A '1' written to bit 2 will force HWEN/PGEN/GPIO high; a 0 written to bit 2 will force HWEN/PGEN/GPIO low.               |

- (1) This represents the amount of time each programmed bit will be present at HWEN/PGEN/GPIO. The entire pattern period will be 32 × Bit Period.
- (2) This duty cycle indicates the fraction of time the pattern is being output at HWEN/PGEN/GPIO. For example the 1/2 duty cycle (bits <5:3> = 010) will have the 32 bit pattern output once followed by a dead time (HWEN/PGEN/GPIO high impedance) equal to 1x's the pattern period (Deadtime = 32 × Bit\_Period × (1/DutyCycle -1). For the 100% duty cycle setting the 32 bit pattern will repeat constantly with no deadtime.

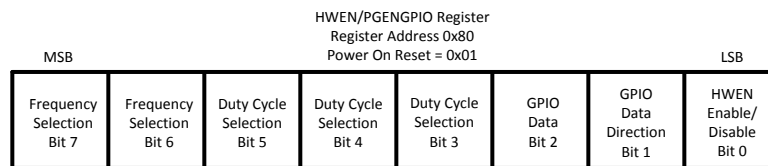
**Figure 45. HPG Register Description**
**Table 7. GPIO Register Function**

| Bits 7 - 2 | GPIO Data (Bit 1) | Data Direction (Bit 0) | Function  |
|------------|-------------------|------------------------|---|
| X          | X                 | 0                      | GPIO is configured as a GPIO input with the input data read back via bit [1]. This is the default power on state. |
| X          | X                 | 1                      | GPIO is configured as a logic output. The output logic voltage is written to bit [1].                             |

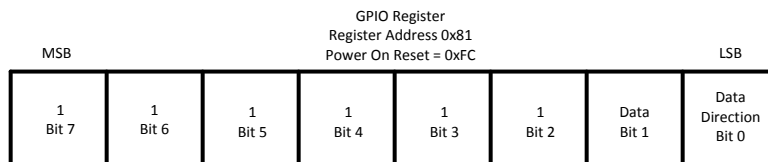
**Figure 46. GPIO Register Description**

[Figure 47](#) – [Figure 50](#) detail the Pattern Generator Data Registers. These hold the 32 bit data that is output at HWEN/PGEN/GPIO in PGEN mode. The data is output LSB first (Bit 0 of PGEN0) and MSB last (Bit 7 of PGEN3).





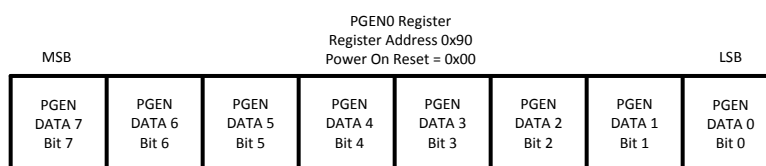
**Figure 47. PGEN0 Register Description****Figure 48. PGEN1 Register Description****Figure 49. PGEN2 Register Description****Figure 50. PGEN3 Register Description**

Figure 51 shows a write sequence to the pattern generator programmed to output the waveform in Figure 52. In this example HPG register bits <7:6> = 01 (for 26ms/bit) and bits <5:3> = 010 (for 1/2 duty cycle). The pattern data in registers (PGEN0 – PGEN2) are all loaded with 0xAC. A ‘1’ will force the HWEN/PGEN/GPIO output low while a ‘0’ will force HWEN/PGEN/GPIO open drain. When set for a 26ms/bit period the pattern will be output LSB first (PGEN0, bit 0) and repeat every

$$t_{\text{PERIOD}} = \frac{26 \text{ ms/bit} \times 32 \text{ bits}}{1/2 \text{ Duty cycle}} = 1.664\text{s} \quad (4)$$

When set for ½ duty cycle there will be a dead time (HWEN/PGEN/GPIO high impedance) between each pattern and equal to the pattern period. In applications where HWEN/PGEN/GPIO is used to pull current through an indicator LED a ‘1’ corresponds to the LED on and a ‘0’ corresponds to the LED off.

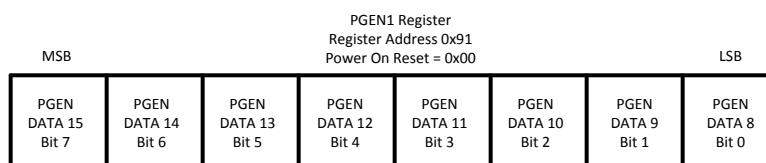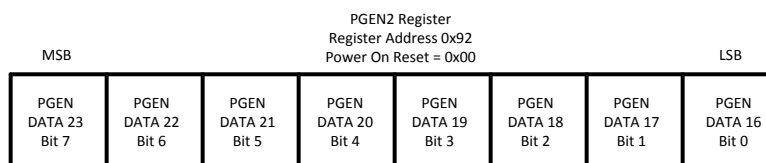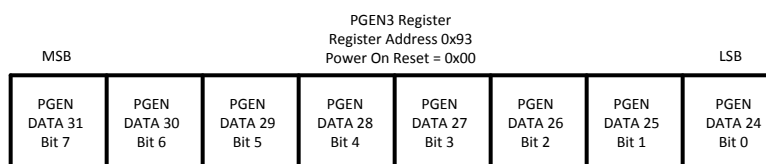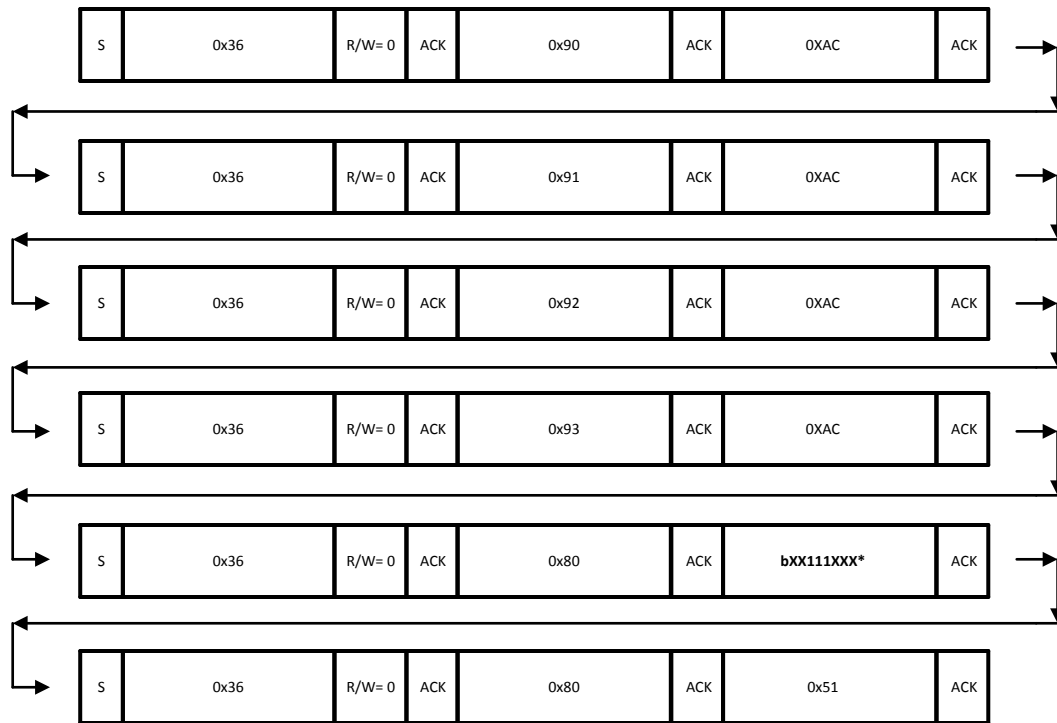

\*Only bits <5:3> are necessary in this byte the rest are don't cares. Bits <5:3> = '111' are necessary to latch the pattern generator data bits into the internal shift register.

Figure 51. Pattern Generation Write Sequence

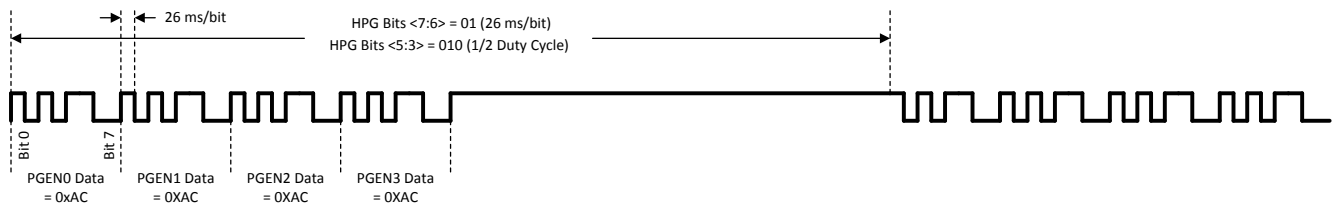


Figure 52. Pattern Generation Output

## Shutdown and Output Isolation

The LM3528 provides a true shutdown for either MAIN or SUB/FB when configured as a White LED bias supply. Write a 0 to ENM (bit 1) of the General Purpose register to turn off the MAIN current sink and force MAIN high impedance. Write a 0 to ENS (bit 2) of the General Purpose register to turn off the SUB/FB current sink and force SUB/FB high impedance. Writing a 1 to ENM or ENS turns on the MAIN and SUB/FB current sinks respectively. When in shutdown the leakage current into MAIN or SUB/FB is typically 1.8µA. See [Typical Performance Characteristics](#) Plots for start-up responses of the LM3528 using the ENM and ENS bits in White LED and OLED modes.

## Application Information

### LED Current Setting/Maximum LED Current

Connect a resistor ( $R_{SET}$ ) from SET to GND to program the maximum LED current ( $I_{LED\_MAX}$ ) into MAIN or SUB/FB. The  $R_{SET}$  to  $I_{LED\_MAX}$  relationship is:

$$I_{LED\_MAX} = 192 \times \frac{1.244V}{R_{SET}} \quad (5)$$

where SET provides the constant 1.244V output.

### Output Voltage Setting (OLED Mode)

Connect Feedback resistors from the converters output to SUB/FB to GND to set the output voltage in OLED mode (see R1 and R2 in the [Figure 1](#) (OLED Panel Power Supply)). First select R2 < 100kΩ then calculate R1 such that:

$$R1 = R2 \left( \frac{V_{OUT}}{1.21V} - 1 \right) \quad (6)$$

In OLED mode the MAIN current sink continues to regulate the current through MAIN, however,  $V_{MAIN}$  is no longer regulated. To avoid dropout and ensure proper current regulation the application must ensure that  $V_{MAIN} > 0.3V$ .

### Input Capacitor Selection

Choosing the correct size and type of input capacitor helps minimize the input voltage ripple caused by the switching of the LM3528's boost converter. For continuous inductor current operation the input voltage ripple is composed of 2 primary components, the capacitor discharge (delta  $V_Q$ ) and the capacitor's equivalent series resistance (delta  $V_{ESR}$ ). These ripple components are found by:

$$\Delta V_Q = \frac{\Delta I_L \times D}{2 \times f_{SW} \times C_{IN}}$$

and

$$\Delta V_{ESR} = 2 \times \Delta I_L \times R_{ESR}$$

$$\text{where } \Delta I_L = \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2 \times f_{SW} \times L \times V_{OUT}} \quad (7)$$

In the typical application circuit a 1μF ceramic input capacitor works well. Since the ESR in ceramic capacitors is typically less than 5mΩ and the capacitance value is usually small, the input voltage ripple is primarily due to the capacitive discharge. With larger value capacitors such as tantalum or aluminum electrolytic the ESR can be greater than 0.5Ω. In this case the input ripple will primarily be due to the ESR.

### Output Capacitor Selection

The LM3528's output capacitor supplies the LED current during the boost converters on time. When the switch turns off the inductor energy is discharged through the diode supplying power to the LED's and restoring charge to the output capacitor. This causes a sag in the output voltage during the on time and a rise in the output voltage during the off time. The output capacitor is therefore chosen to limit the output ripple to an acceptable level depending on LED or OLED panel current requirements and input/output voltage differentials. For proper operation ceramic output capacitors ranging from 1μF to 2.2μF are required.

As with the input capacitor, the output voltage ripple is composed of two parts, the ripple due to capacitor discharge (delta  $V_Q$ ) and the ripple due to the capacitors ESR (delta  $V_{ESR}$ ). For continuous conduction mode, the ripple components are found by:

$$\Delta V_Q = \frac{I_{LED} \times (V_{OUT} - V_{IN})}{f_{SW} \times V_{OUT} \times C_{OUT}} \quad \text{and}$$

$$\Delta V_{ESR} = R_{ESR} \times \left( \frac{I_{LED} \times V_{OUT}}{V_{IN}} + \Delta I_L \right)$$

$$\text{where } \Delta I_L = \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2 \times f_{SW} \times L \times V_{OUT}} \quad (8)$$



Table 8 lists different manufacturers for various capacitors and their case sizes that are suitable for use with the LM3528. When configured as a dual output LED driver a 1µF output capacitor is adequate. In OLED mode for output voltages above 12V a 2.2µF output capacitor is required (see Low Output Voltage Operation (OLED) Section).

**Table 8. Recommended Output Capacitors**

| Manufacturer | Part Number        | Value | Case Size | Voltage Rating |
|--------------|--------------------|-------|-----------|----------------|
| TDK          | C1608X5R1E105M     | 1µF   | 0603      | 25V            |
| Murata       | GRM39X5R105K25D539 | 1µF   | 0603      | 25V            |
| TDK          | C2012X5R1E225M     | 2.2µF | 0805      | 25V            |
| Murata       | GRM219R61E225KA12  | 2.2µF | 0805      | 25V            |

## Inductor Selection

The LM3528 is designed for use with a 10µH inductor, however 22µH are suitable providing the output capacitor is increased 2x. When selecting the inductor ensure that the saturation current rating ( $I_{SAT}$ ) for the chosen inductor is high enough and the inductor is large enough such that at the maximum LED current the peak inductor current is less than the LM3528's peak switch current limit. This is done by choosing:

$$I_{SAT} > \frac{I_{LED}}{\eta} \times \frac{V_{OUT}}{V_{IN}} + \Delta I_L \quad \text{where}$$

$$\Delta I_L = \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2 \times f_{SW} \times L \times V_{OUT}}, \text{ and}$$

$$L > \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2 \times f_{SW} \times V_{OUT} \times \left( I_{PEAK} - \frac{I_{LED\_MAX} \times V_{OUT}}{\eta \times V_{IN}} \right)} \quad (9)$$

Values for  $I_{PEAK}$  can be found in the plot of peak current limit vs.  $V_{IN}$  in the Typical Performance Characteristics graphs. Table 9 shows possible inductors, as well as their corresponding case size and their saturation current ratings.

**Table 9. Recommended Inductors**

| Manufacturer | Part Number       | Value | Dimensions          | $I_{SAT}$ | DC Resistance |
|--------------|-------------------|-------|---------------------|-----------|---------------|
| TDK          | VLF3012AT-100MR49 | 10µH  | 2.6mm×2.8mm×1mm     | 490mA     | 0.36Ω         |
| Coilcraft    | LPS3008-103ML     | 10µH  | 2.95mm×2.95mm×0.8mm | 490mA     | 0.65Ω         |
| TDK          | VLF4012AT-100MR79 | 10µH  | 3.5mm×3.7mm×1.2mm   | 800mA     | 0.3Ω          |
| Coilcraft    | LPS4012-103ML     | 10µH  | 3.9mm×3.9mm×1.1mm   | 700mA     | 0.35Ω         |
| TOKO         | A997AS-100M       | 10µH  | 3.8mm×3.8mm×1.8mm   | 580mA     | 0.18Ω         |

## Diode Selection

The output diode must have a reverse breakdown voltage greater than the maximum output voltage. The diodes average current rating should be high enough to handle the LM3528's output current. Additionally, the diodes peak current rating must be high enough to handle the peak inductor current. Schottky diodes are recommended due to their lower forward voltage drop (0.3V to 0.5V) compared to (0.6V to 0.8V) for PN junction diodes. If a PN junction diode is used, ensure it is the ultra-fast type ( $t_{rr} < 50\text{ns}$ ) to prevent excessive loss in the rectifier. For Schottky diodes the B05030WS (or equivalent) work well for most designs. See Table 10 for a list of other Schottky Diodes with similar performance.

**Table 10. Recommended Schottky Diodes**

| Manufacturer     | Part Number  | Package                     | Reverse Breakdown Voltage | Average Current Rating |
|------------------|--------------|-----------------------------|---------------------------|------------------------|
| On Semiconductor | NSR0230P2T5G | SOD-923 (0.8mm×0.6mm×0.4mm) | 30V                       | 200mA                  |
| On Semiconductor | NSR0230M2T5G | SOD-723 (1mm×0.6mm×0.52mm)  | 30V                       | 200mA                  |
| On Semiconductor | RB521S30T1   | SOD-523 (1.2mm×0.8mm×0.6mm) | 30V                       | 200mA                  |
| Diodes Inc.      | SDM20U30     | SOD-523 (1.2mm×0.8mm×0.6mm) | 30V                       | 200mA                  |
| Diodes Inc.      | B05030WS     | SOD-323 (1.6mm×1.2mm×1mm)   | 30V                       | 0.5A                   |
| Philips          | BAT760       | SOD-323 (1.6mm×1.2mm×1mm)   | 20V                       | 1A                     |

**Output Current Range (OLED Mode)**

The maximum output current the LM3528 can deliver in OLED mode is limited by 4 factors (assuming continuous conduction); the peak current limit of 770mA (typical), the inductor value, the input voltage, and the output voltage. Calculate the maximum output current ( $I_{OUT\_MAX}$ ) using the following equation:


$$I_{OUT\_MAX} = \frac{(I_{PEAK} - \Delta I_L) \times \eta \times V_{IN}}{V_{OUT}}$$

where

$$\Delta I_L = \frac{V_{IN} \times (V_{OUT} - V_{IN})}{2 \times f_{SW} \times L \times V_{OUT}}$$

(10)

For the typical application circuit with  $V_{OUT} = 18V$  and assuming 70% efficiency, the maximum output current at  $V_{IN} = 2.7V$  will be approximately 70mA. At 4.2V due to the shorter on times and lower average input currents the maximum output current (at 70% efficiency) jumps to approximately 105mA. Figure 53 shows a plot of  $I_{OUT\_MAX}$  vs.  $V_{IN}$  using the above equation, assuming 80% efficiency. In reality, factors such as current limit and efficiency will vary over  $V_{IN}$ , temperature, and component selection. This can cause the actual  $I_{OUT\_MAX}$  to be higher or lower.

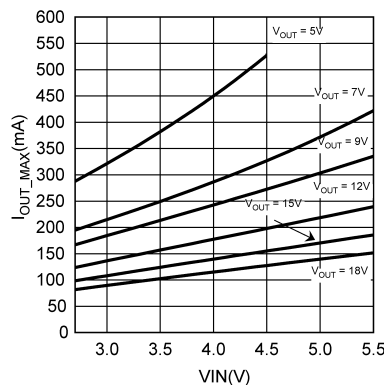**Figure 53. Typical Maximum Output Current in OLED Mode (assumed 80% efficiency)****Output Voltage Range (OLED Mode)**

The LM3528's output voltage is constrained by 2 factors. On the low end it is limited by the minimum duty cycle of 10% (assuming continuous conduction) and on the high end it is limited by the over voltage protection threshold ( $V_{OVP}$ ) of 22V (typical). In order to maintain stability when operating at different output voltages the output capacitor and inductor must be changed. Refer to Table 10 for different  $V_{OUT}$ ,  $C_{OUT}$ , and  $L$  combinations.



4. Connect the inductor on the top layer close to the SW pin. There should be a low impedance connection from the inductor to SW due to the large DC inductor current, and at the same time the area occupied by the SW node should be small so as to reduce the capacitive coupling of the high  $dV/dt$  present at SW that can couple into nearby traces.

5. , Route the traces for  $R_{SET}$  and the feedback divider away from the SW node to minimize the capacitance between these nodes that can couple the high  $dV/dt$  present at SW into them. Furthermore, the feedback divider and  $R_{SET}$  should have dedicated returns that terminate directly to the PGND pin of the device. This will minimize any shared current with COUT or CIN that can lead to instability. Avoid routing the SUB/FB node close to other traces that can see high  $dV/dt$  such as the I2C pins. The capacitive coupling on the PCB between FB and these nodes can disturb the output voltage and cause large voltage spikes at VOUT.

6. Do not connect any external capacitance to the SET pin.

7. Refer to the LM3528 Evaluation Board as a guide for proper layout.

## REVISION HISTORY

| Changes from Revision A (May 2013) to Revision B           | Page               |
|--|--------------------|
| • Changed layout of National Data Sheet to TI format ..... | <a href="#">28</a> |

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| LM3528TME/NOPB   | ACTIVE        | DSBGA        | YFQ                | 12   | 250            | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 85    | SE                      | <a href="#">Samples</a> |
| LM3528TMX/NOPB   | ACTIVE        | DSBGA        | YFQ                | 12   | 3000           | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 85    | SE                      | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM3528TME/NOPB | DSBGA        | YFQ             | 12   | 250  | 178.0              | 8.4                | 1.35    | 1.75    | 0.76    | 4.0     | 8.0    | Q1            |
| LM3528TMX/NOPB | DSBGA        | YFQ             | 12   | 3000 | 178.0              | 8.4                | 1.35    | 1.75    | 0.76    | 4.0     | 8.0    | Q1            |




## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM3528TME/NOPB | DSBGA        | YFQ             | 12   | 250  | 210.0       | 185.0      | 35.0        |
| LM3528TMX/NOPB | DSBGA        | YFQ             | 12   | 3000 | 210.0       | 185.0      | 35.0        |



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2020, Texas Instruments Incorporated