

Product Overview

The Qorvo QPD1881L is a 400 W (P_{3dB}) discrete GaN on SiC HEMT which operates from 2.7 to 2.9 GHz. Input pre-match within the package results in ease of external board match and saves board space. The device is in an industry standard air cavity package and is ideally suited for civilian radar, weather radar and test instrumentation. The device can support both CW and pulsed operations.


Lead-free and ROHS compliant

Evaluation boards are available upon request.



2-lead NI-780 Package (Eared)

Functional Block Diagram

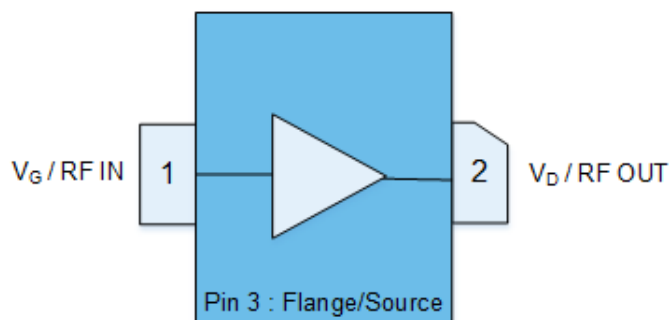

Key Features

- Frequency: 2.7 to 2.9 GHz
- Output Power (P_{3dB})¹: 427 W
- Linear Gain¹: 21.2 dB
- Typical PAE_{3dB}¹: 75.1%
- Operating Voltage: 50 V
- CW and Pulse capable

Note 1: @ 2.9 GHz Load Pull

Applications

- Civilian radar
- Weather radar
- Test instrumentation

Ordering info

Part No.	ECCN	Description
QPD1881L	EAR99	2.7 – 2.9 GHz Transistor
QPD1881LS2	EAR99	2 Piece Sample Bag
QPD1881LEVB01	EAR99	2.7 – 2.9 GHz Evaluation Board

Absolute Maximum Ratings ^{1, 2, 3}

Parameter	Rating	Units
Breakdown Voltage, BV_{DG}	145	V
Gate Voltage Range, V_G	-7 to +2	V
Drain Current, $I_{D_{MAX}}$	56	A
Drain Voltage, V_D	55	V
Gate Current Range, I_G	See pg. 12	mA
Power Dissipation, Pulsed, P_{DISS}^2	466	W
Power Dissipation, CW, P_{DISS}	237	W
RF Input Power, Pulsed, P_{IN}^3	41.9	dBm
Channel Temperature, T_{CH}	275	°C
Mounting Temperature (30 Seconds)	320	°C
Storage Temperature	-65 to +150	°C

Notes:

1. Operation of this device outside the parameter ranges given above may cause permanent damage
2. Pulsed, 100us PW, 10% DC, Package base at 85 °C
3. Pulsed, 100us PW, 10% DC, T = 25 °C

Recommended Operating Conditions ^{1, 2, 3, 4}

Parameter	Min	Typ	Max	Units
Operating Temp. Range	-40	+25	+85	°C
Drain Voltage Range, V_D	–	+50	–	V
Drain Bias Current, I_{DQ}	–	0.7	–	A
Drain Current, I_D^4	–	13	–	A
Gate Voltage, V_G^3	–	-2.8	–	V
Channel Temperature (T_{CH})	–	–	250	°C
Power Dissipation (P_D) ^{2,4}	–	–	418	W
Power Dissipation (P_D), CW ²	–	–	213	W

Notes:

1. Electrical performance is measured under conditions noted in the electrical specifications table. Specifications are not guaranteed over all recommended operating conditions
2. Package base at 85 °C
3. To be adjusted to desired I_{DQ}
4. Pulsed, 100us PW, 10% DC

Measured Load Pull Performance – Power Tuned ^{1, 2}

Parameter	Typical Values		Units
Frequency, F	2.7	2.9	GHz
Output Power at 3dB compression, P_{3dB}	56.2	56.3	dBm
Power Added Efficiency at 3dB compression, PAE_{3dB}	67.8	63.3	%
Gain at 3dB compression, G_{3dB}	17.3	16.6	dB

Notes:

1. Test conditions unless otherwise noted: $T_A = 25$ °C, $V_D = 50$ V, $I_{DQ} = 700$ mA
2. Pulsed, 100 us Pulse Width, 10% Duty Cycle.

Measured Load Pull Performance – Efficiency Tuned ^{1, 2}

Parameter	Typical Values		Units
Frequency, F	2.7	2.9	GHz
Output Power at 3dB compression, P_{3dB}	55.1	54.4	dBm
Power Added Efficiency at 3dB compression, PAE_{3dB}	73.2	75.1	%
Gain at 3dB compression, G_{3dB}	18.5	18.2	dB

Notes:

1. Test conditions unless otherwise noted: $T_A = 25$ °C, $V_D = 50$ V, $I_{DQ} = 700$ mA
2. Pulsed, 100 us Pulse Width, 10% Duty Cycle.

RF Characterization – 2.7 – 2.9 GHz EVB Performance at 2.8 GHz ¹

Parameter	Min	Typ	Max	Units
Linear Gain, G_{LIN}	–	19.7	–	dB
Output Power at 3dB compression point, P3dB	–	306.4	–	W
Drain Efficiency at 3dB compression point, DEFF3dB	–	66.8	–	%
Gain at 3dB compression point, G3dB	–	16.7	–	dB

Notes:

1. $V_D = 50\text{ V}$, $I_{DQ} = 0.7\text{ A}$, Temp = +25 °C, Pulse Width = 100 us, Duty Cycle = 10%

RF Characterization – Mismatch Ruggedness at 2.8 GHz ^{1, 2, 3}

Symbol	Parameter	dB Compression	Typical
VSWR	Impedance Mismatch Ruggedness	3	10:1

Notes:


1. Test conditions unless otherwise noted: $T_A = 25\text{ °C}$, $V_D = 50\text{ V}$, $I_{DQ} = 0.7\text{ A}$
2. Input drive power is determined at pulsed 3dB compression under matched condition at EVB output connector
3. Pulse: 100us, 10% Duty cycle

Measured Load-Pull Smith Charts ^{1, 2}

Notes:

1. Test Conditions: $V_D = 50$ V, $I_{DQ} = 700$ mA, 100 us Pulse Width, 10% Duty Cycle, Temp = 25°C.
2. See page 13 for load pull reference planes where the performance was measured.

2.7GHz, Load-pull

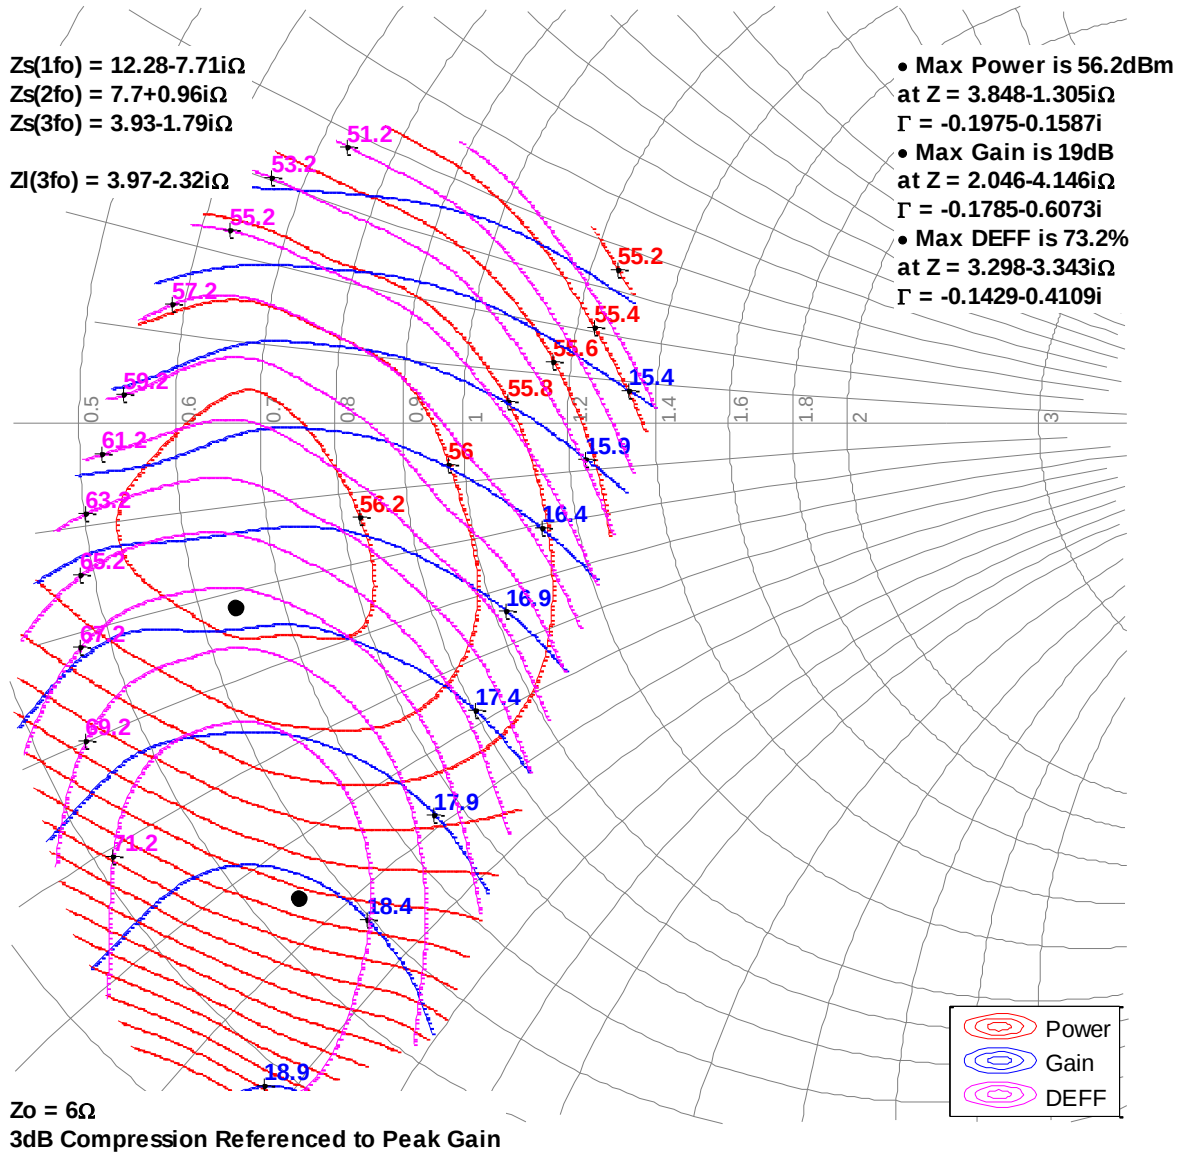


Measured Load-Pull Smith Charts ^{1, 2}

Notes:

1. Test Conditions: $V_D = 50$ V, $I_{DQ} = 700$ mA, 100 us Pulse Width, 10% Duty Cycle, Temp = 25°C.
2. See page 13 for load pull reference planes where the performance was measured.





2.9GHz, Load-pull

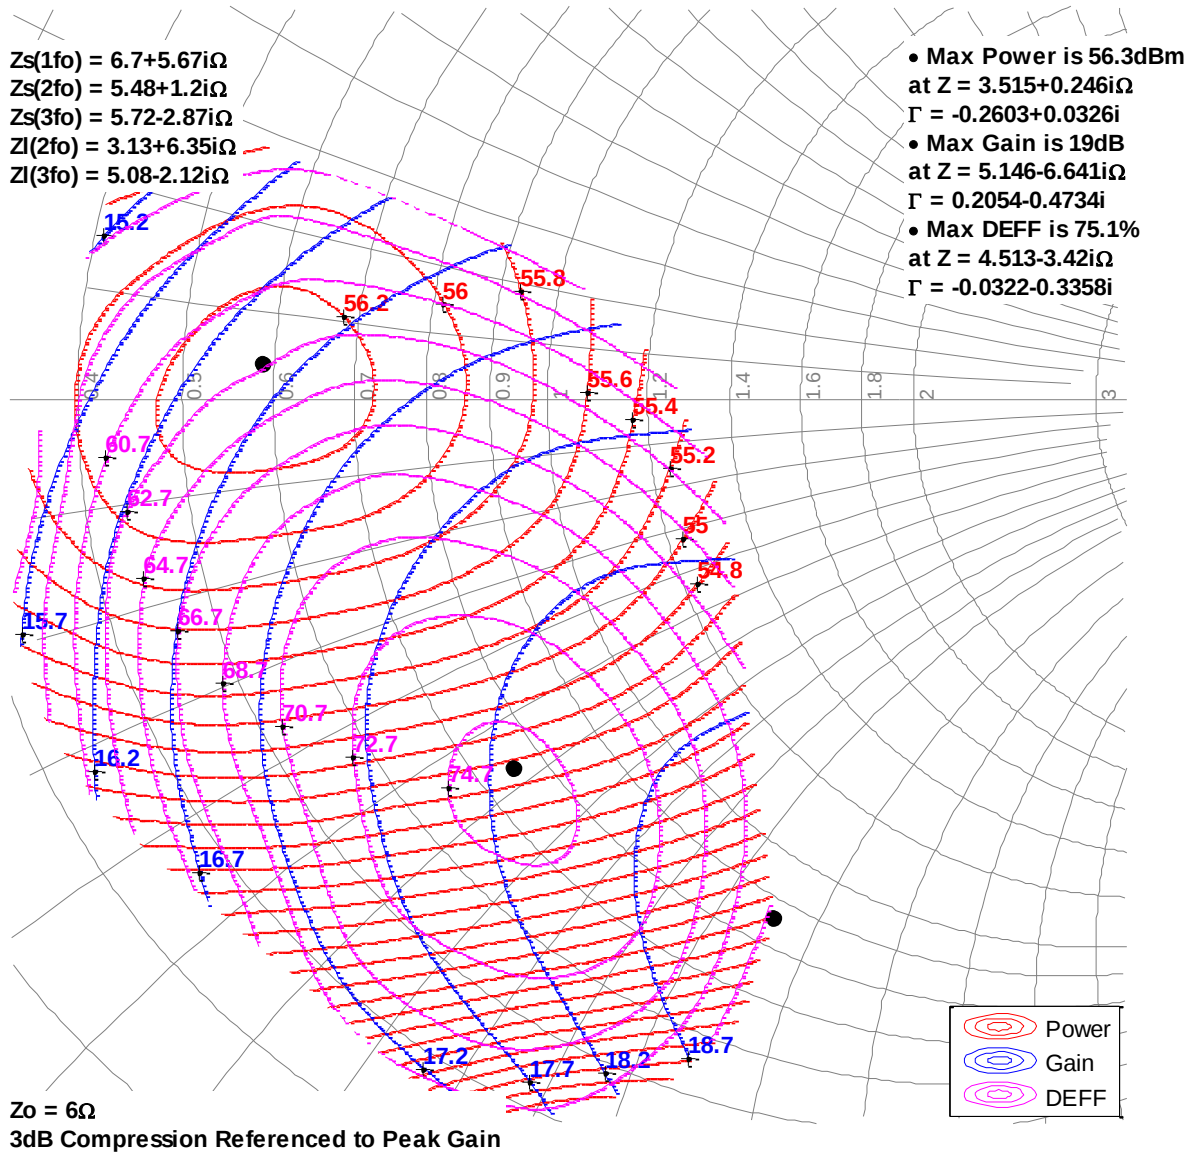

Typical Measured Performance – Load-Pull Drive-up ^{1, 2}

Notes:





1. Test Conditions: $V_D = 50$ V, $I_{DQ} = 700$ mA, 100 μ s Pulse Width, 10% Duty Cycle, Temp = 25°C.
2. See page 13 for load pull reference planes where the performance was measured.

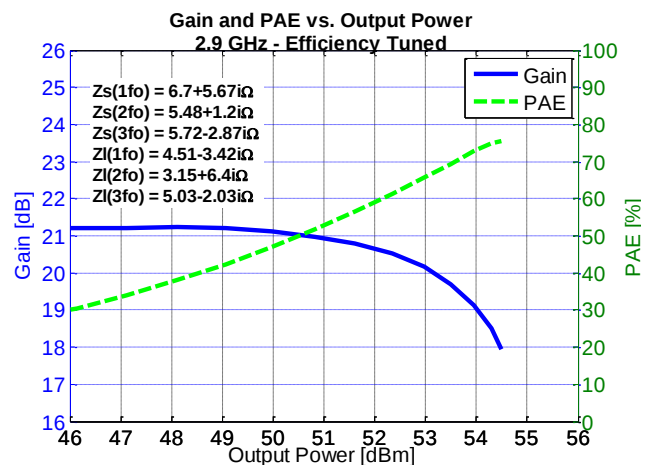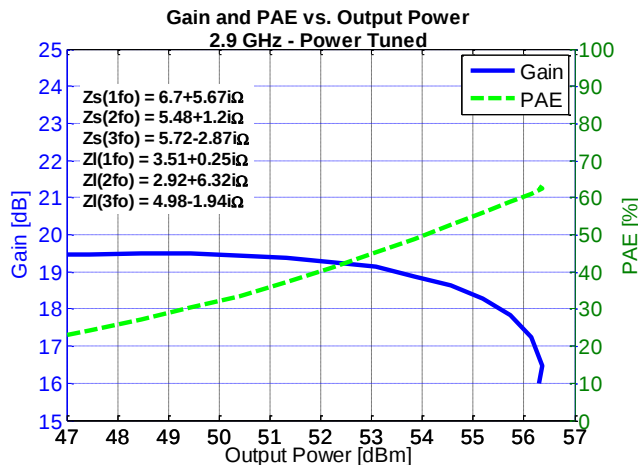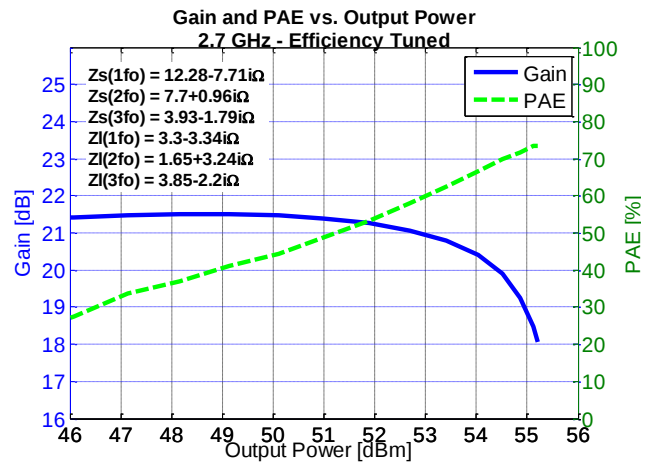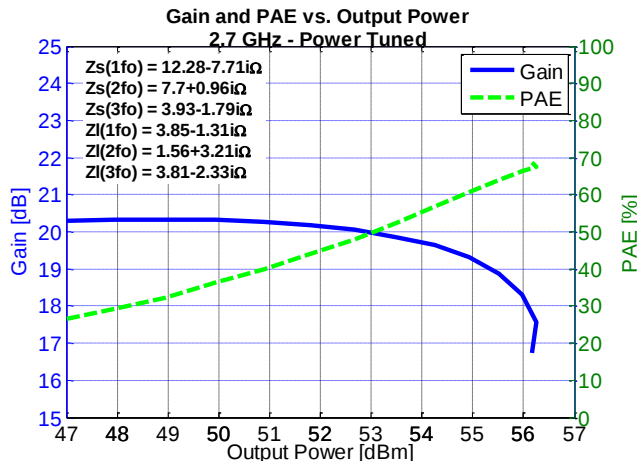

Large signal performance over temperatures of 2.7 – 2.9 GHz EVB ¹

Notes:





1. Test Conditions: $V_D = 50$ V, $I_{DQ} = 0.7$ A, 100 μ s Pulse Width, 10% Duty Cycle.

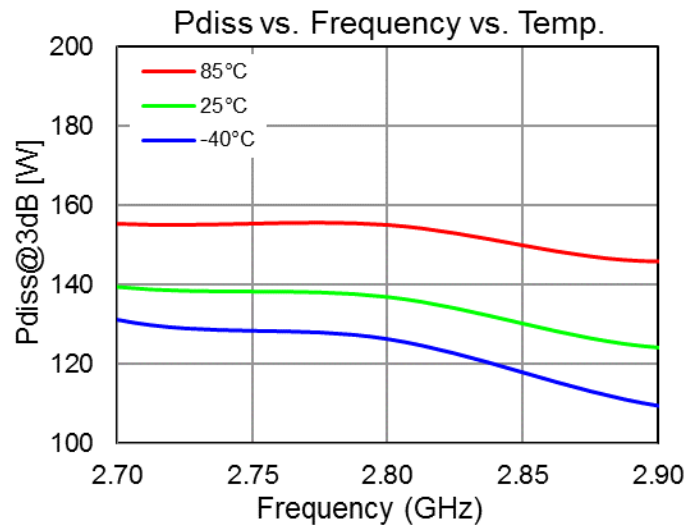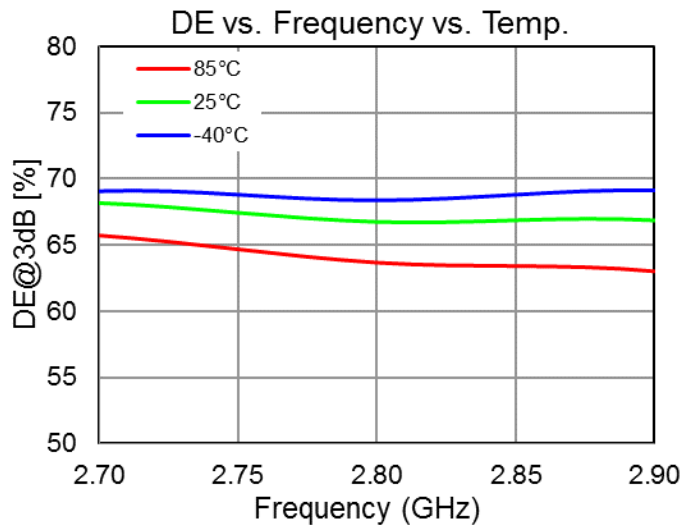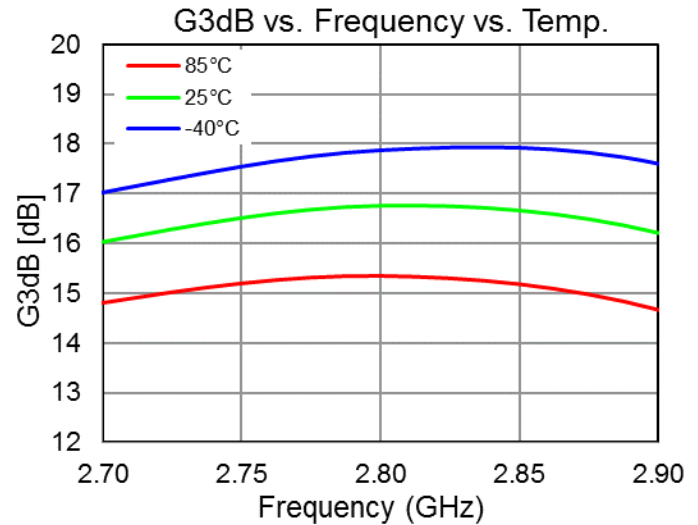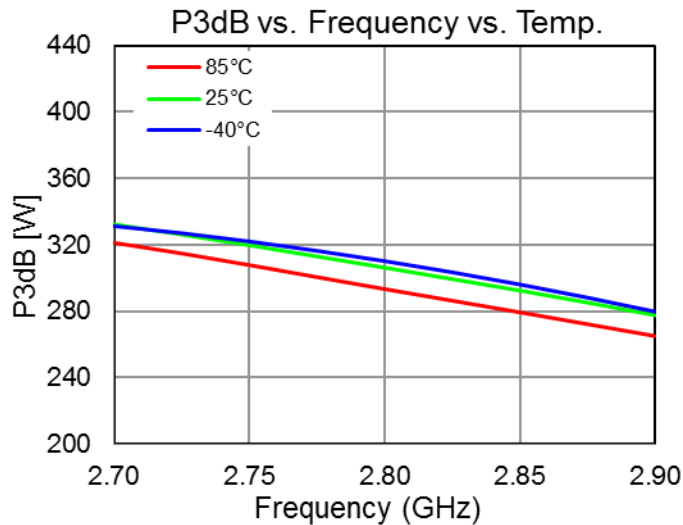


Large signal performance at 25°C of 2.7 – 2.9 GHz EVB ¹

Notes:

1. Test Conditions: $V_D = 50$ V, $I_{DQ} = 0.7$ A, 100 μ s Pulse Width, 10% Duty Cycle.

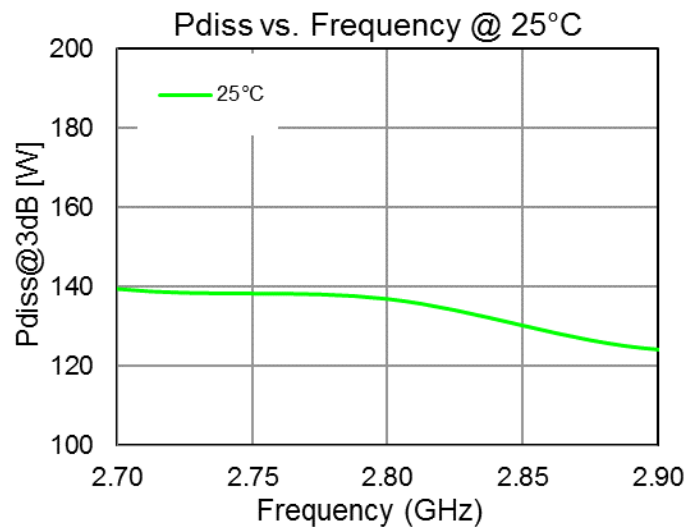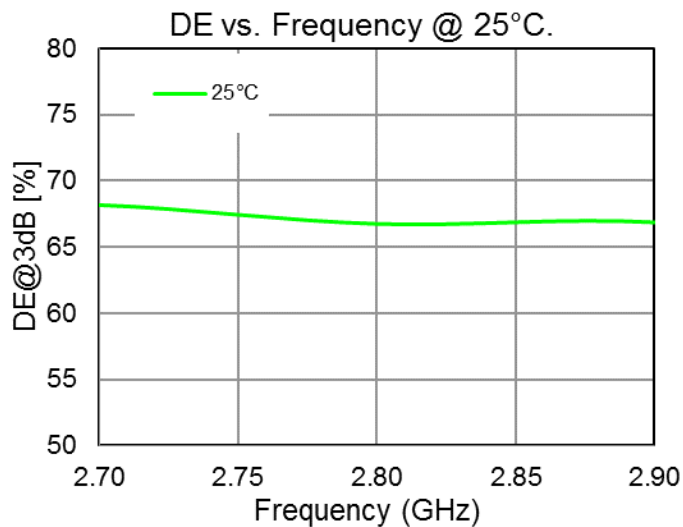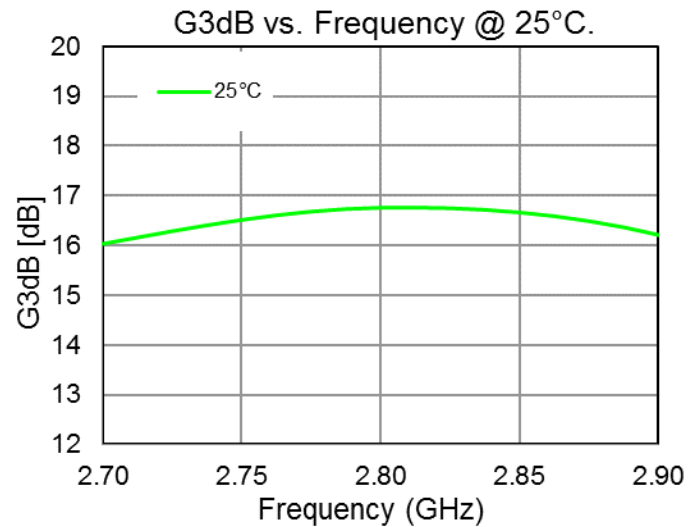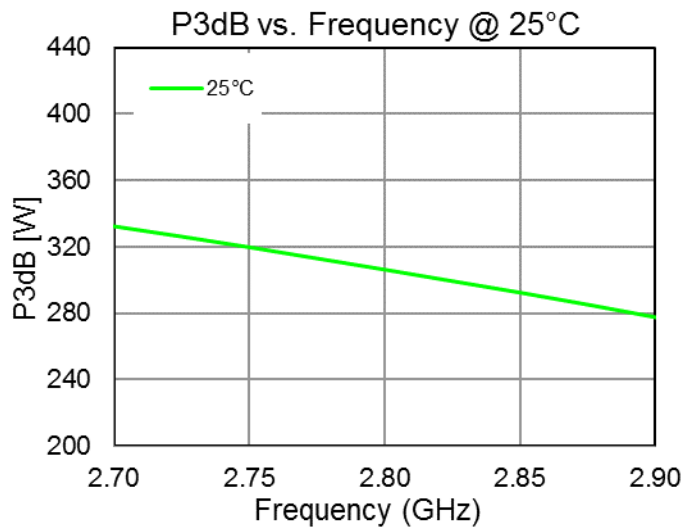

Thermal and Reliability Information – CW^{1, 2, 3}

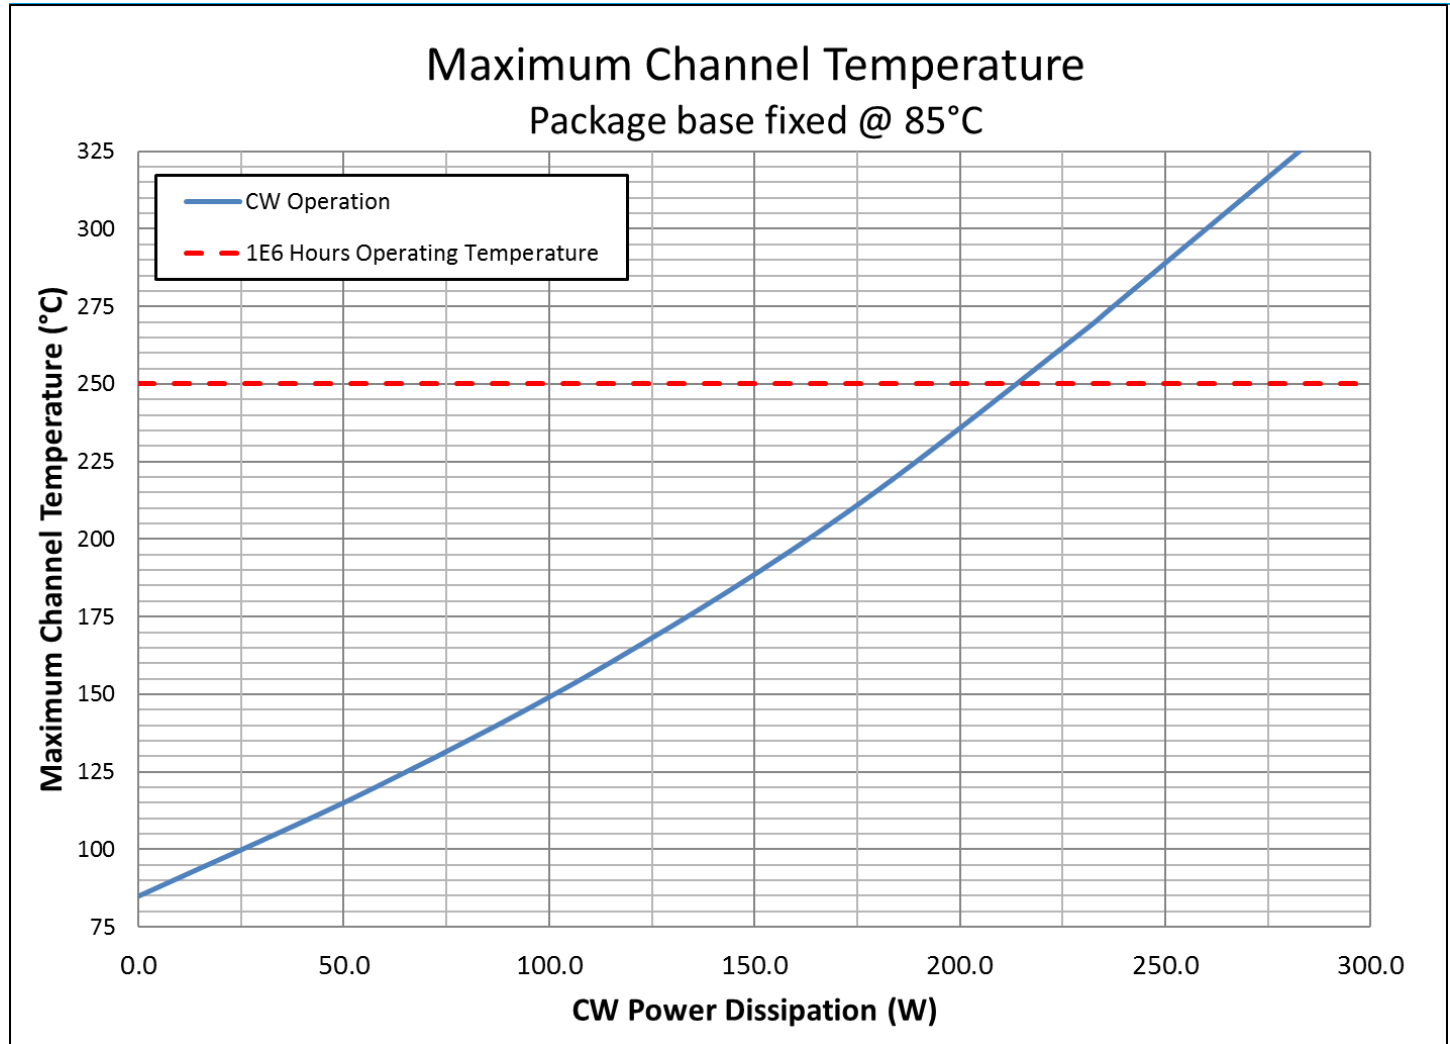


Parameter	Conditions	Values	Units
Thermal Resistance, FEA (θ_{JC}) ^{(1) (3)}	85 °C Case Pdiss = 57.6 W CW	0.61	°C/W
Peak Channel Temperature, FEA (T_{CH}) ⁽¹⁾		120	°C
Median Lifetime, FEA (T_M) ⁽¹⁾		1.6E11	Hrs
Peak Channel Temperature, IR ⁽²⁾		109 ⁽²⁾	°C
Thermal Resistance, FEA (θ_{JC}) ^{(1) (3)}	85 °C Case Pdiss = 115.2 W CW	0.66	°C/W
Peak Channel Temperature, FEA (T_{CH}) ⁽¹⁾		161	°C
Median Lifetime, FEA (T_M) ⁽¹⁾		1.9E9	Hrs
Peak Channel Temperature, IR ⁽²⁾		137 ⁽²⁾	°C
Thermal Resistance, FEA (θ_{JC}) ^{(1) (3)}	85 °C Case Pdiss = 172.8 W CW	0.72	°C/W
Peak Channel Temperature, FEA (T_{CH}) ⁽¹⁾		209	°C
Median Lifetime, FEA (T_M) ⁽¹⁾		2.0E7	Hrs
Peak Channel Temperature, IR ⁽²⁾		166 ⁽²⁾	°C

Notes:

1. Finite Element Analysis (FEA) thermal values shall be used to determine performance and reliability.
Unless otherwise noted, all thermal references are FEA.
2. Infrared (IR) thermal values are for reference only and can not be used to determine performance or reliability.
3. Thermal resistance measured to backside of package.

Thermal and Reliability Information – Pulsed ^{1, 2, 3}

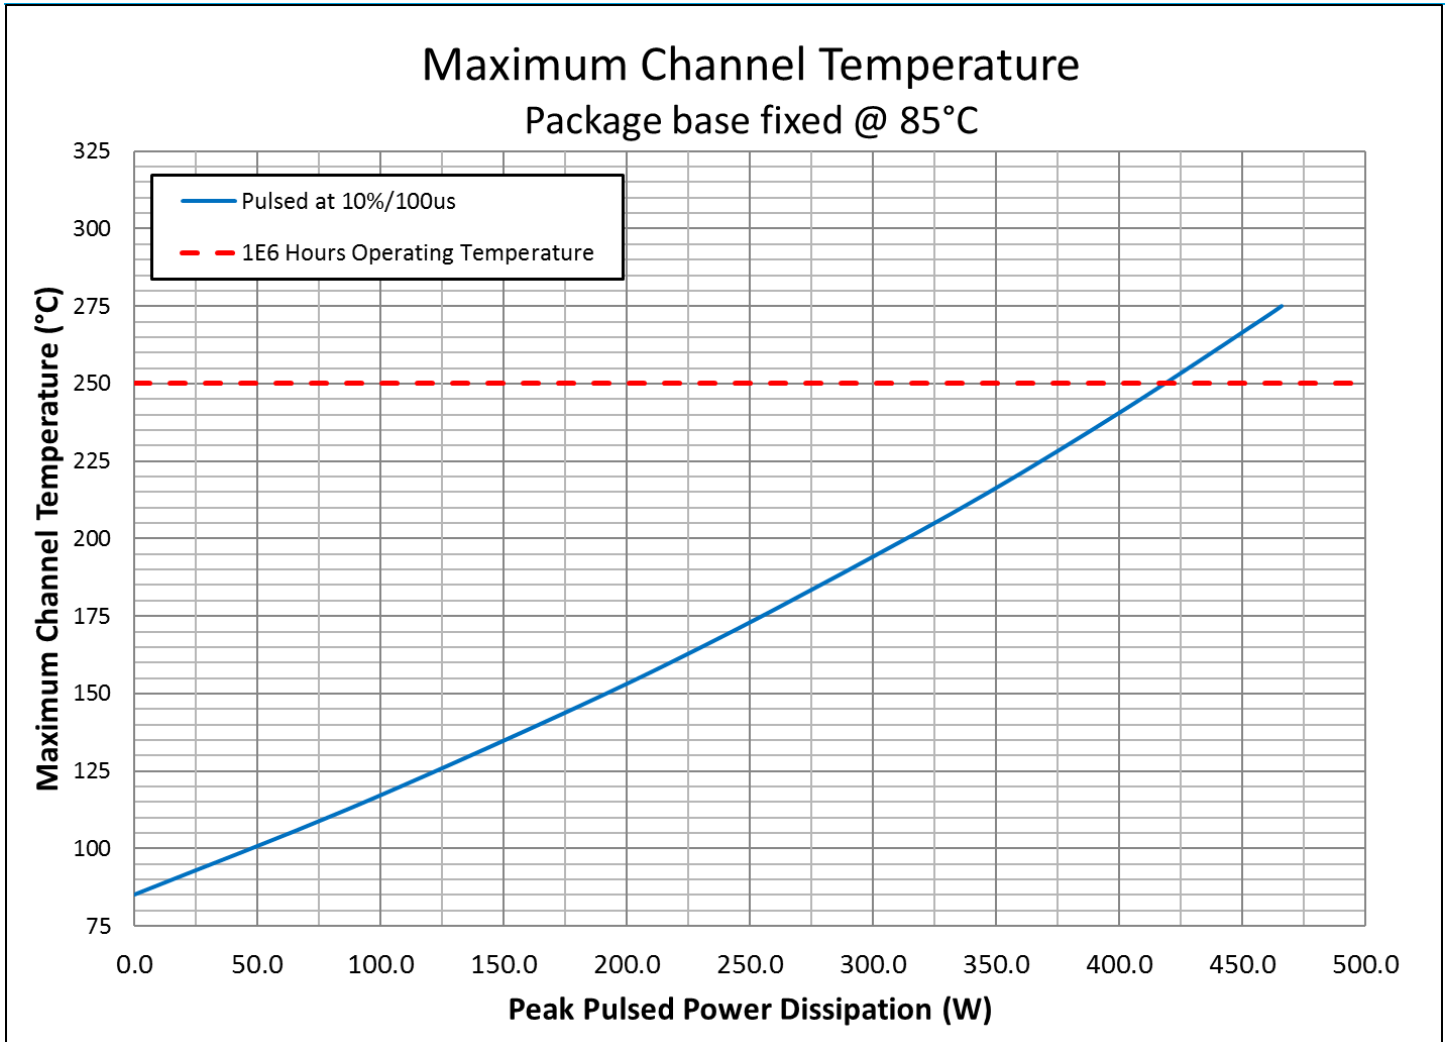


Parameter	Conditions	Values	Units
Thermal Resistance, FEA (θ_{JC}) ^{(1) (3)}	85 °C Case Pdiss = 115.2 W Pulse: 100 us PW, 10% DC	0.32	°C/W
Peak Channel Temperature, FEA (T_{CH}) ⁽¹⁾		122	°C
Median Lifetime, FEA (T_M) ⁽¹⁾		1.0E12	Hrs
Peak Channel Temperature, IR ⁽²⁾		110 ⁽²⁾	°C
Thermal Resistance, FEA (θ_{JC}) ^{(1) (3)}	85 °C Case Pdiss = 172.8 W Pulse: 100 us PW, 10% DC	0.34	°C/W
Peak Channel Temperature, FEA (T_{CH}) ⁽¹⁾		143	°C
Median Lifetime, FEA (T_M) ⁽¹⁾		1.0E11	Hrs
Peak Channel Temperature, IR ⁽²⁾		125 ⁽²⁾	°C
Thermal Resistance, FEA (θ_{JC}) ^{(1) (3)}	85 °C Case Pdiss = 230.4 W Pulse: 100 us PW, 10% DC	0.35	°C/W
Peak Channel Temperature, FEA (T_{CH}) ⁽¹⁾		165	°C
Median Lifetime, FEA (T_M) ⁽¹⁾		1.0E10	Hrs
Peak Channel Temperature, IR ⁽²⁾		139 ⁽²⁾	°C

Notes:

1. Finite Element Analysis (FEA) thermal values shall be used to determine performance and reliability.
Unless otherwise noted, all thermal references are FEA.
2. Infrared (IR) thermal values are for reference only and can not be used to determine performance or reliability.
3. Thermal resistance measured to backside of package.


Median Lifetime ^{1, 2}

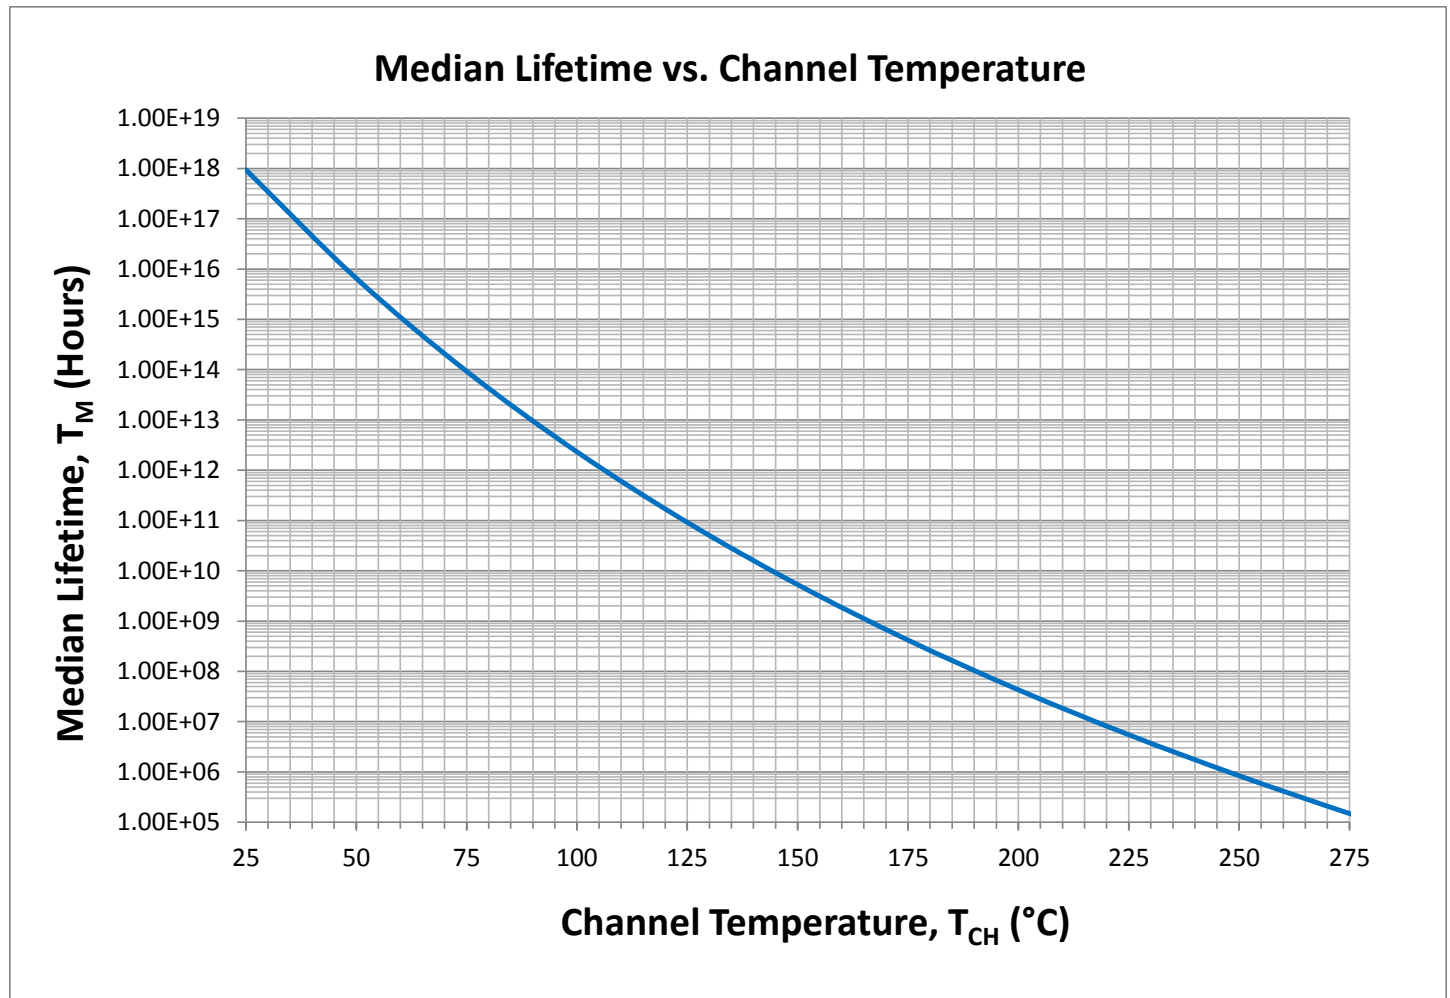


Notes:

1. Test Conditions: $V_D = +50$ V; Failure Criteria = 10 % reduction in I_{D_MAX} during DC Life Testing.
2. For pulsed signals, average lifetime is average lifetime at maximum channel temperature divided by duty cycle.

Maximum Gate Current

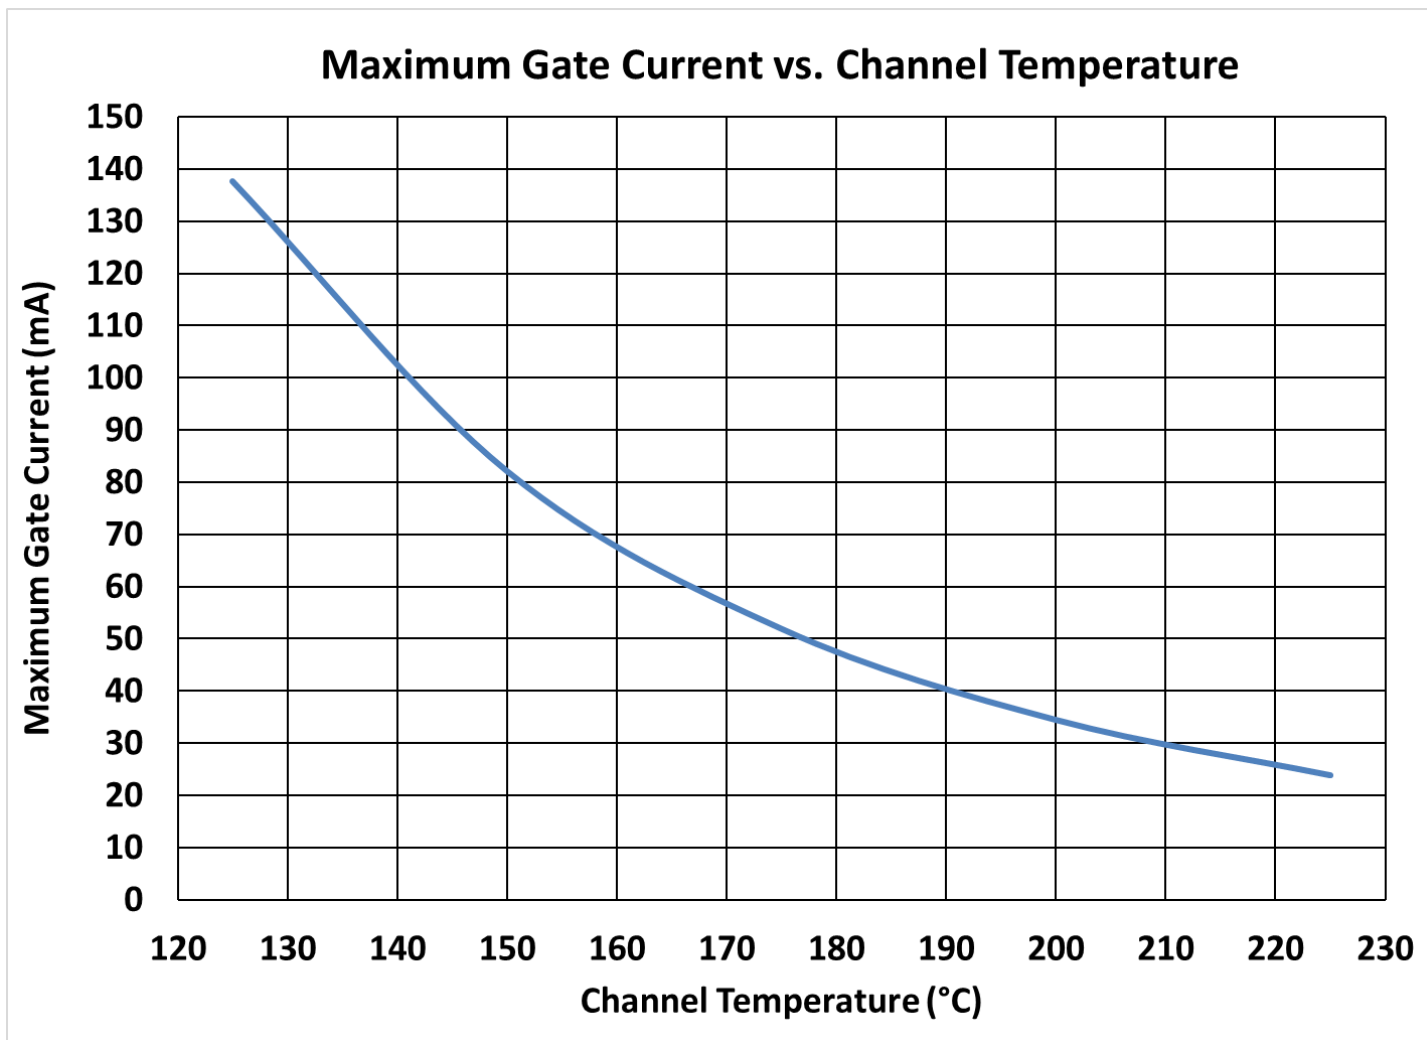

Pin Configuration and Description ¹

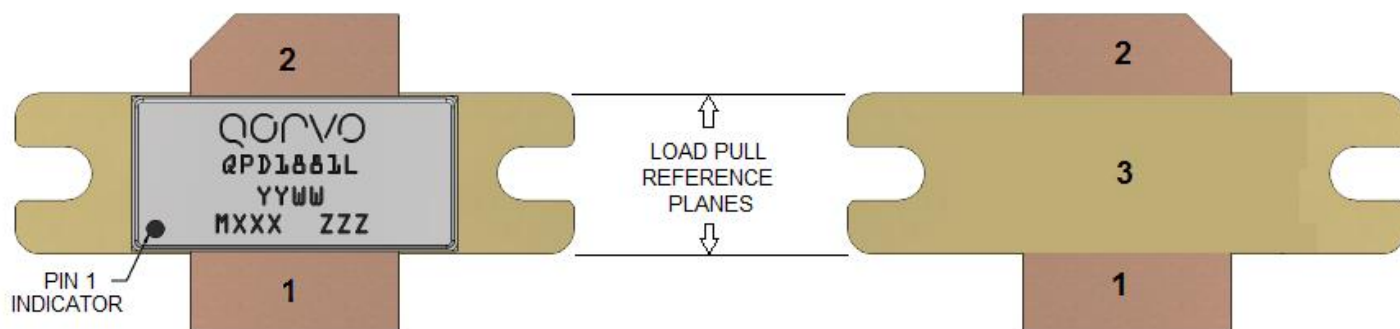


Note:

- 1- The QPD1881L will be marked with the “QPD1881L” designator and a lot code marked below the part designator. The “YY” represents the last two digits of the calendar year the part was manufactured, the “WW” is the work week of the assembly lot start, the “MXXX” is the production lot number, and the “ZZZ” is an auto-generated serial number.

Pin	Symbol	Description
1	RF IN / V_G	Gate
2	RF OUT / V_D	Drain
3	Source	Source / Ground / Backside of part


Mechanical Drawing

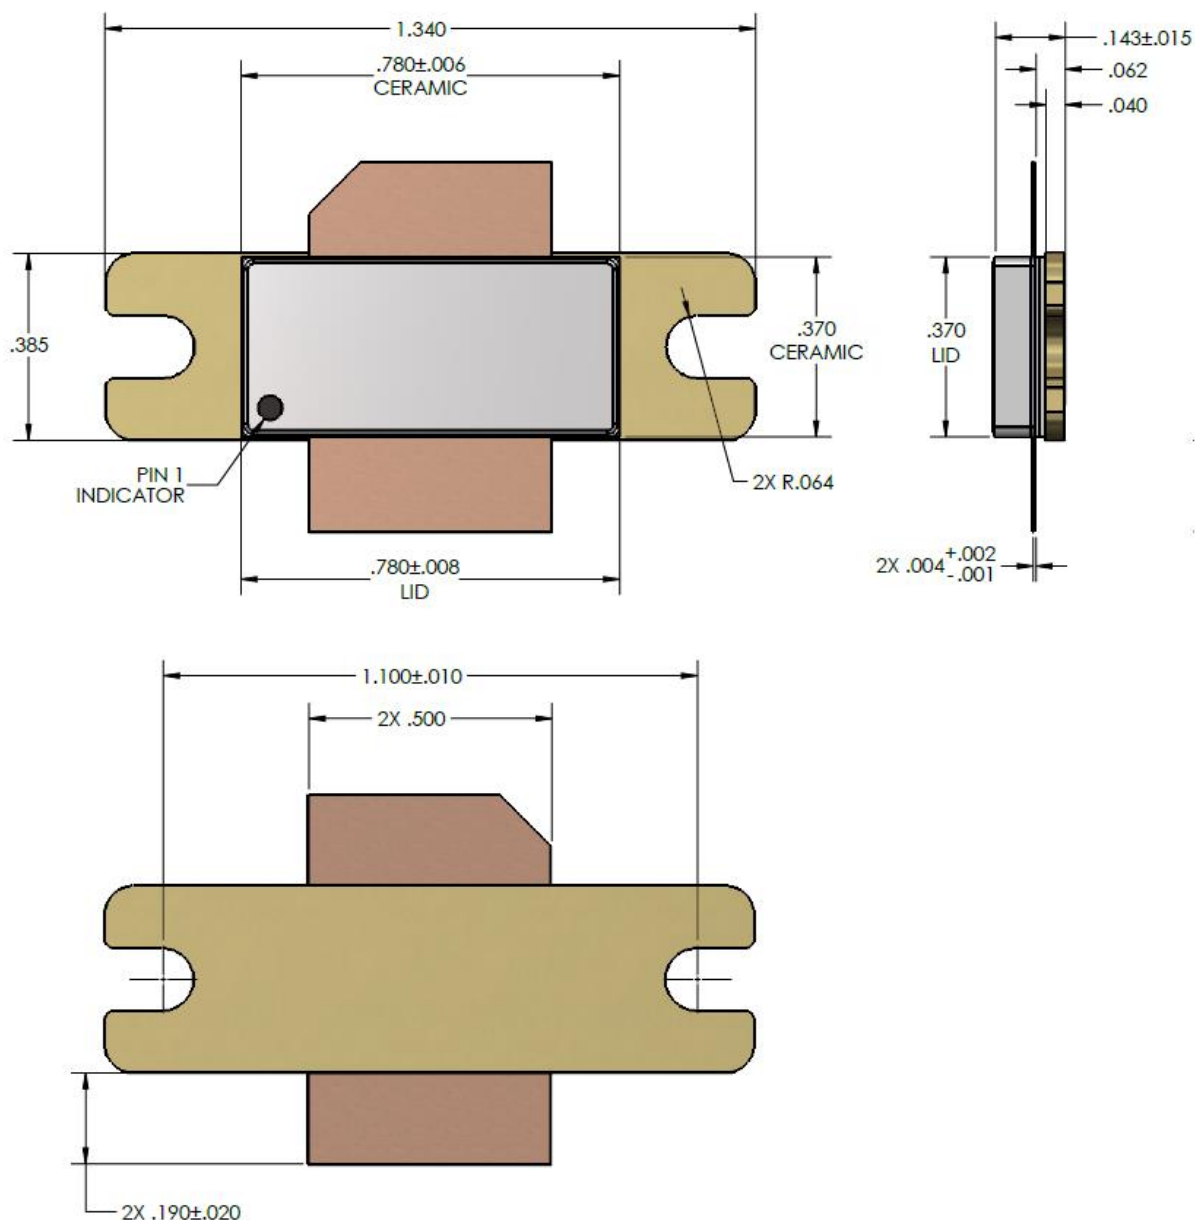

Notes:

- 1- ALL DIMENSIONS ARE IN INCHES. DIMENSION TOLERANCE IS ± 0.005 in, UNLESS NOTED OTHERWISE.
- 2- MATERIAL:
 - PACKAGE BASE : METAL/CERAMIC
 - PACKAGE LID : CERAMIC
 - LEAD : ALLOY 42
- 3- PACKAGE EXPOSED METAL BASE AND LEADS ARE GOLD PLATED.
- 4- PART IS EPOXY SEALED.
- 5- PARTS MEET INDUSTRY NI780 FOOTPRINT.
- 6- BODY DIMENSIONS DO NOT INCLUDE LID SHIFT OR EPOXY RUN OUT WHICH CAN BE UP TO .020 PER SIDE.

2.7 – 2.9 GHz Application Circuit - Schematic

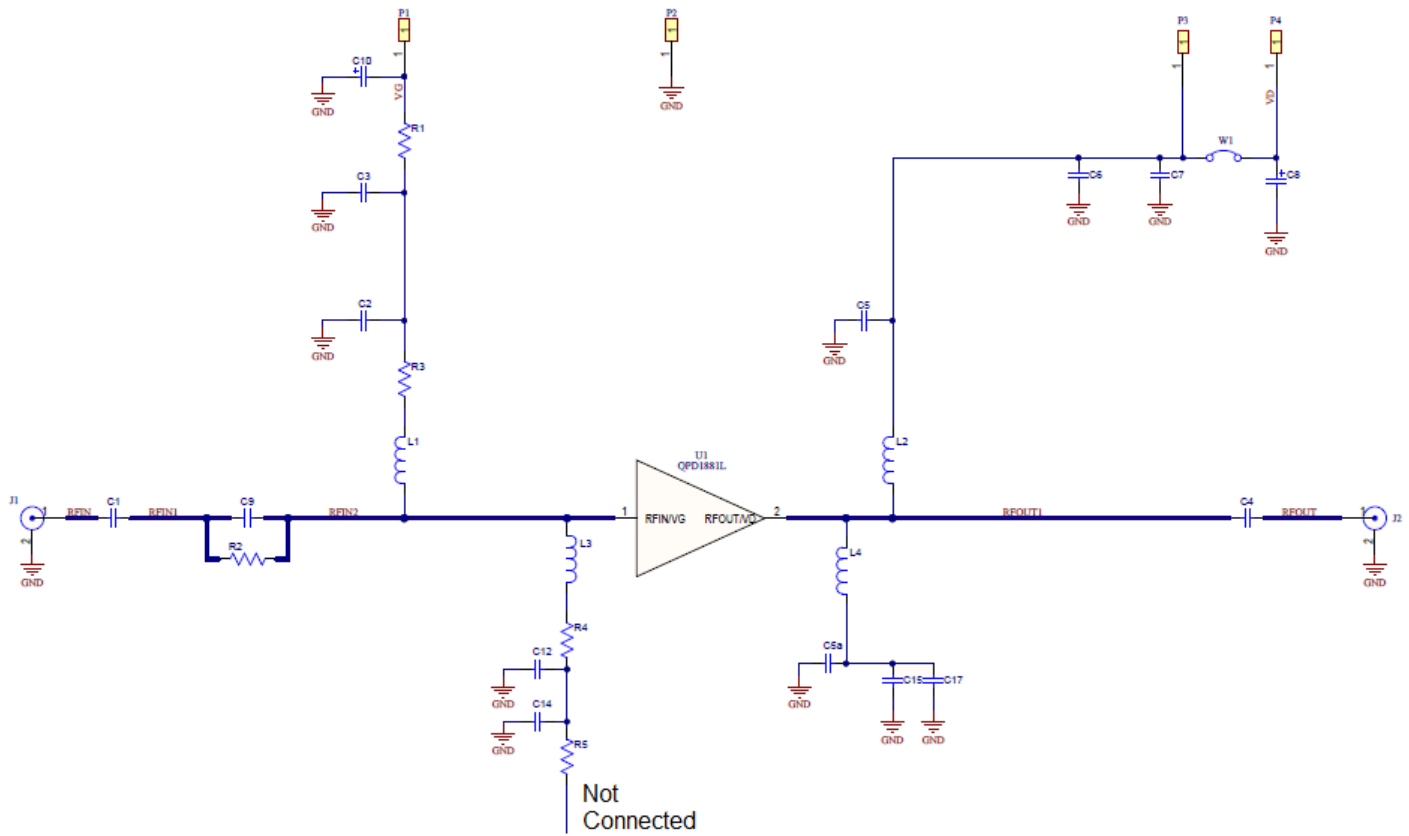

Bias-up Procedure

1. Set V_G to -5 V.
2. Set I_D current limit to 2 A.
3. Apply 50 V V_D .
4. Slowly adjust V_G until I_D is set to 0.7 A.
5. Apply RF.


Bias-down Procedure

1. Turn off RF signal.
2. Turn off V_D
3. Wait 2 seconds to allow drain capacitor to discharge.
4. Turn off V_G

2.7 – 2.9 GHz Application Circuit – Layout¹

Notes:


1. PCB material is RO4350B 0.020" thick, 1 oz. copper each side.

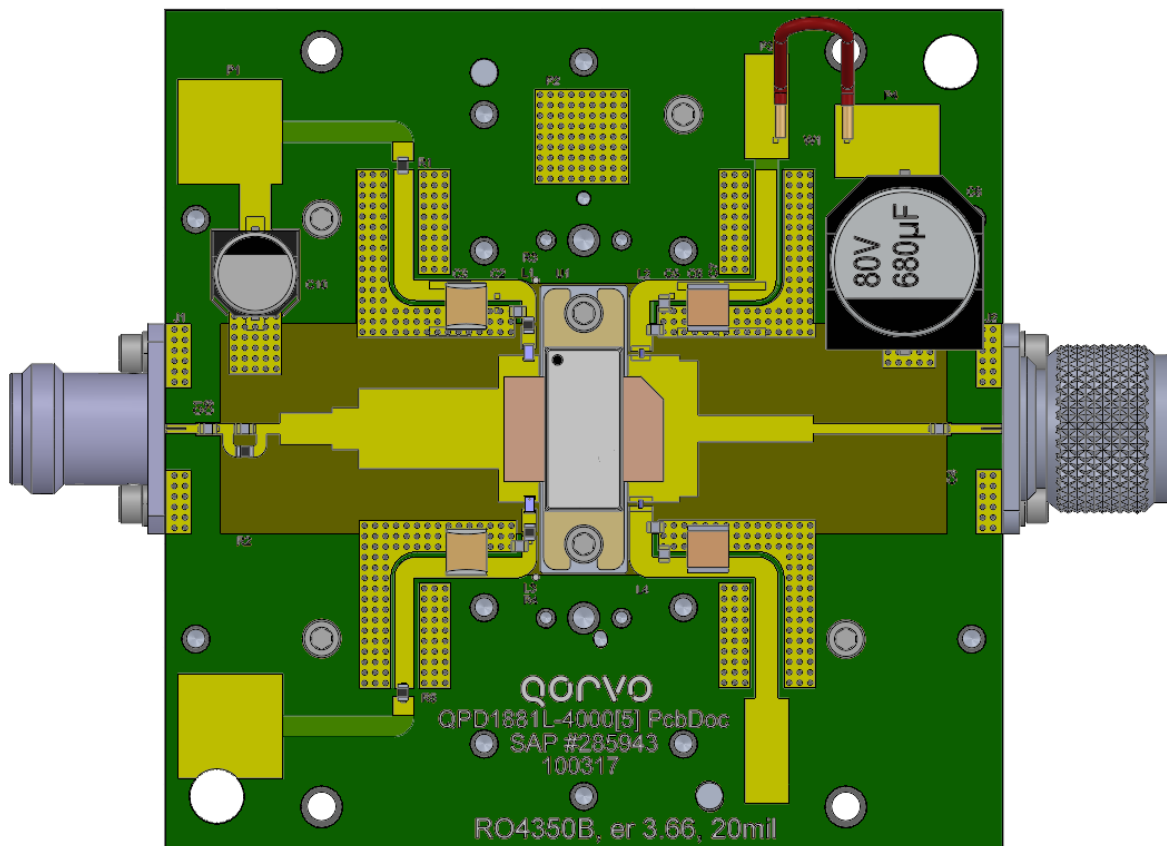

2.7 – 2.9 GHz Application Circuit – Bill of Material

Reference Design	Value	Qty	Manufacturer	Part Number
R1,R5	0 Ohm	2	Kamaya Inc.	RMC1/10JPTP
R2	330 Ohm	1	Panasonic	ERJ-6GEYJ331
R3,R4	10 Ohm	2	Panasonic	ERJ-6ENF10R0V
C1,C4	18 pF	2	American Technical Ceramics	600F180FT250XT
C9,C2,C12,C5,C5A	10 pF	4	American Technical Ceramics	600F100FT250XT
C6,C15	100 pF	2	American Technical Ceramics	600F101JT250XT
C7,C17	10 uF	4	TDK	C5750X7S2A106M230KB
C3,C14	10 uF	4	TDK	C5750X7R1H106K230KB
C10	220 uF	1	United Chemi-Con	EMVY500ADA221MJA0G
C8	680 uF	1	Vishay	MAL215099708E3
L1,L3	8.2 nH	2	Coilcraft Inc.	0805HT-8N2TJRC
L2,L4	8.1 nH	2	Coilcraft Inc.	0908SQ-8N1JLB
Connectors	N-Type	2	Huber+Suhner, Inc.	23_N-50-0-33

Recommended Solder Temperature Profile

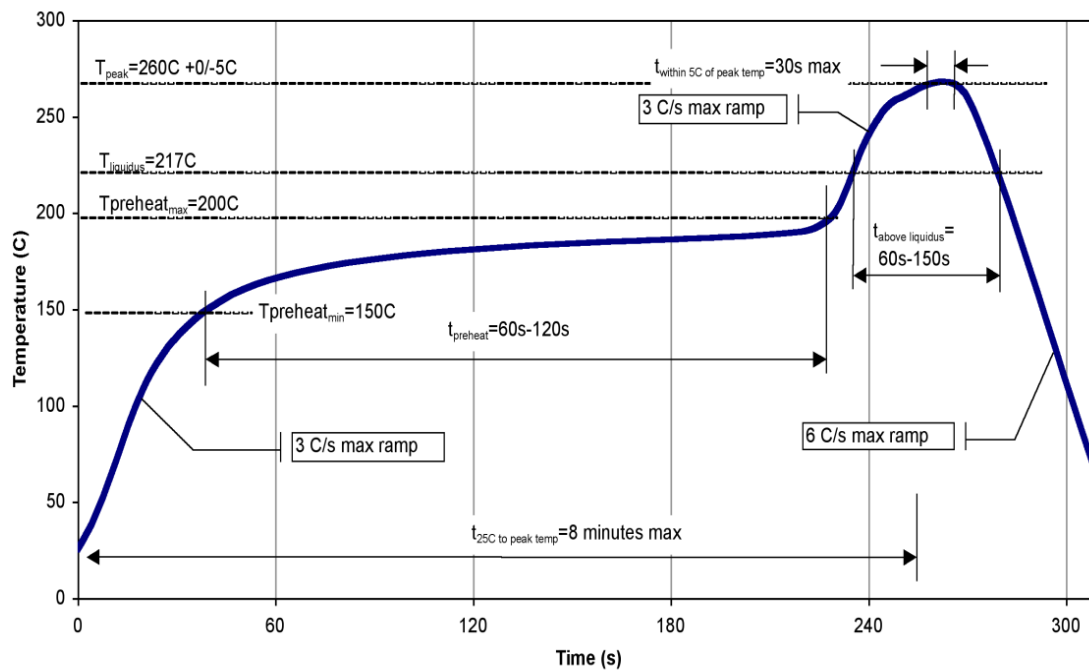

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	TBD	JEDEC JS-001
ESD – Charged Device Model (CDM)	TBD	JEDEC JS-002
MSL – Moisture Sensitivity Level	MSL3	JESD J-STD-020 (260°C Convection reflow)



Caution!
ESD-Sensitive Device

Solderability

Compatible with both lead-free (260°C max. reflow temp.) and tin/lead (245°C max. reflow temp.) soldering processes.

Solder profiles available upon request.

The use of no-clean solder to avoid washing after soldering is recommended.

Contact plating: NiAu

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about Qorvo:

Web: www.Qorvo.com
Email: info-sales@qorvo.com

Tel: +1.972.994.8465
Fax: +1.972.994.8504

For technical questions and application information: **Email:** info-products@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2017 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.