




### PNP SMALL SIGNAL TRANSISTOR IN SOT323

### **Features**

- Ideally Suited for Automatic Insertion
- Complementary NPN Types Available (BC846AW BC848CW)
- For Switching and AF Amplifier Applications
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability
- PPAP Capable (Note 4)

### **Mechanical Data**

- Case: SOT323
- Case Material: Molded Plastic, "Green" Molding Compound UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish—Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (2)
- Weight: 0.006 grams (Approximate)

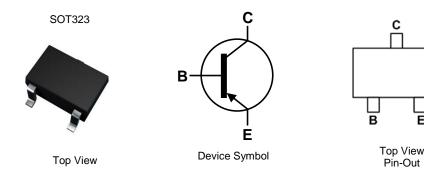

### Ordering Information (Notes 4 & 5)


Product	Compliance	Marking	Reel Size (inches)	Quantity per Reel
BC856AW-7-F	AEC-Q101	КЗА	7	3000
BC856BW-7-F	AEC-Q101	K3B	7	3000
BC856BW-13-F	AEC-Q101	K3B	13	10,000
BC857AW-7-F	AEC-Q101	КЗА	7	3000
BC857BW-7-F	AEC-Q101	K3B	7	3000

Product	Compliance	Marking	Reel Size (inches)	Quantity per Reel
BC857BWQ-13-F	Automotive	K3B	13	10,000
BC857CW-7-F	AEC-Q101	K3G	7	3000
BC858AW-7-F	AEC-Q101	K3A	7	3000
BC858BW-7-F	AEC-Q101	K3B	7	3000
BC858CW-7-F	AEC-Q101	K3G	7	3000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. Automotive products are AEC-Q101 qualified and are PPAP capable. Automotive, AEC-Q10x and standard products are electrically and thermally the same, except where specified. For more information, please refer to https://www.diodes.com/quality/.
- 5. Tape width is 8mm. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

### **Marking Information**



XXX = Product Type Marking Code (See Ordering Information) YM = Date Code Marking Y or  $\overline{Y}$  = Year (ex: F = 2018) M or  $\overline{M}$  = Month (ex: 9 = September)

#### Date Code Key

Year	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Code	F	G	I		J	K	L	М	N	0	Р	Q
Month	lan	Feb	Mar	A	May	1	11	Aug	Sep	Oct	Nov	Dec
WOILLI	Jan	reb	Iviar	Apr	iviay	Jun	Jul	Aug	Seh	OCI	INOV	Dec



## **Absolute Maximum Ratings** (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Charac	Symbol	Value	Unit	
	BC856		-80	
Collector-Base Voltage	BC857	V <sub>CBO</sub>	-50	V
	BC858		-30	
	BC856		-65	
Collector-Emitter Voltage	BC857	V <sub>CEO</sub>	-45	V
	BC858		-30	
Emitter-Base Voltage	V <sub>EBO</sub>	-5.0	V	
Continuous Collector Current	Ic	-100	mA	
Peak Collector Current	I <sub>CM</sub>	-200	mA	
Peak Emitter Current	I <sub>EM</sub>	-200	mA	

## Thermal Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Power Dissipation	(Note 6)	$P_{D}$	200	mW
Thermal Resistance, Junction to Ambient (Note 6)		$R_{\Theta JA}$	625	°C/W
Operating and Storage Temperature Range		$T_J,T_STG$	-65 to +150	°C

# **Electrical Characteristics** (@T<sub>A</sub> = +25°C, unless otherwise specified.)


Cha	racteristic		Symbol	Min	Тур	Max	Unit	Test Condition	
		BC856		-80					
Collector-Base Breakdown Voltage BC857			BV <sub>CBO</sub>	-50	_	_	V	$I_C = -100nA$	
BC858				-30					
BC856				-65					
Collector-Emitter Breakdown	Voltage (Note 7)	BC857	BV <sub>CEO</sub>	-45	_	_	V	$I_C = -10mA$	
		BC858		-30					
Emitter-Base Breakdown Volt	age		BV <sub>EBO</sub>	-5	_	_	V	I <sub>E</sub> = -100nA	
		A		125	180	250			
DC Current Gain (Note 7)	Current Gain Group		h <sub>FE</sub>	220	290	475	_	$V_{CE} = -5.0V, I_{C} = -2.0mA$	
		С		420	520	800		<u> </u>	
Collector Cutoff Current			Ісво		_	-15	nA	V <sub>CB</sub> = -30V	
Concolor Culon Current			ICBO			-4	μΑ	$V_{CB} = -30V, T_A = +150^{\circ}C$	
Collector-Emitter Saturation V	/oltago (Noto 7)		V <sub>CE(sat)</sub>	_	-75	-300	mV	$I_C = -10 \text{mA}, I_B = -0.5 \text{mA}$	
Collector-Entitle Saturation v	rollage (Note 7)				-250	-650		$I_C = -100 \text{mA}, I_B = -5.0 \text{mA}$	
Base-Emitter Turn-On Voltage	e (Note 7)		V <sub>BE(on)</sub>	-600	-650	-750	mV	$I_C = -2mA$ , $V_{CE} = -5V$	
Base-Emilier Turn-On Voltage	e (Note 1)			_	_	-820		$I_C = -10 \text{mA}, V_{CE} = -5 \text{V}$	
Base-Emitter Saturation Volta	ago (Noto 7)		\/·	BE(sat) —	-700	_	mV	$I_C = -10 \text{mA}, I_B = -0.5 \text{mA}$	
Base-Emitter Saturation voita	ige (Note 1)		V BE(sat)		-850	-950		$I_C = -100 \text{mA}, I_B = -5 \text{mA}$	
Output Capacitance			Cobo	_	3	4.5	pF	$V_{CB} = -10V, f = 1.0MHz$	
Transition Frequency			f⊤	100	200	_	MHz	$V_{CE} = -5V, I_{C} = -10mA,$ f = 100MHz	
Noise Figure			NF	_	_	10	dB	$V_{CE} = -5V, I_{C} = -200\mu A$ $R_{S} = 2k\Omega, f = 1kHz$ $\Delta f = 200Hz$	

Notes: 6. For a device mounted on minimum recommended pad layout 1oz copper that is on a single-sided FR4 PCB; device is measured under still air conditions whilst operating in a steady-state.

<sup>7.</sup> Measured under pulsed conditions. Pulse width ≤ 300µs. Duty cycle ≤ 2%



## Typical Electrical Characteristics (@TA = +25°C, unless otherwise specified.)

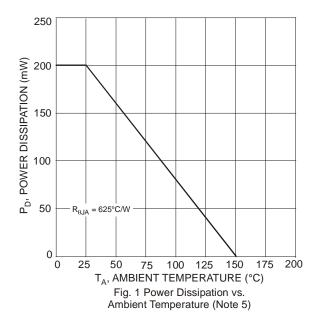

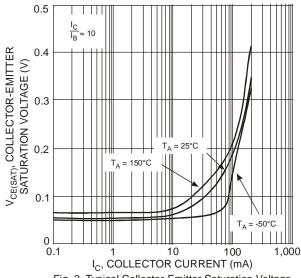
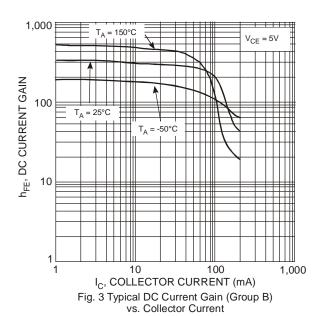


Fig. 2 Typical Collector-Emitter Saturation Voltage vs. Collector Current



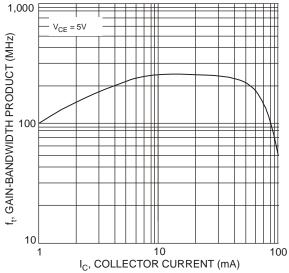



Fig. 4 Typical Gain-Bandwidth Product vs. Collector Current



## **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.


### SOT323

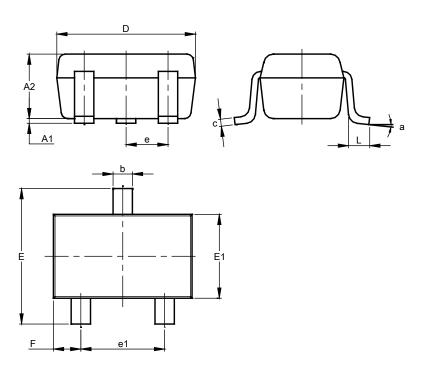

SOT323						
Dim	Min	Max	Тур			
A1	0.00	0.10	0.05			
A2	0.90	1.00	0.95			
b	0.25	0.40	0.30			
С	0.10	0.18	0.11			
D	1.80	2.20	2.15			
Е	2.00	2.20	2.10			
E1	1.15	1.35	1.30			
е	C	).650 B	SC			
e1	1.20	1.40	1.30			
F	0.375	0.475	0.425			
L	0.25	0.40	0.30			
а	0°	8°				
All	Dimen	sions i	in mm			

# **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.



### **SOT323**

Dimensions	Value (in mm)
С	0.650
G	1.300
X	0.470
Y	0.600
Y1	2.500



### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### **LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com