

#### **FEATURES**

- Operates From 2.3 V to 3.6 V
- Max t<sub>pd</sub> of 3.4 ns at 3.3 V
- ±24-mA Output Drive at 3.3 V
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)

### DESCRIPTION/ORDERING INFORMATION

This hex Schmitt-trigger inverter is designed for 2.3-V to 3.6-V  $V_{CC}$  operation.

The SN74ALVC14 contains six independent inverters and performs the Boolean function  $Y = \overline{A}$ .

#### **ORDERING INFORMATION**

T <sub>A</sub>	P	ACKAGE <sup>(1)</sup>	ORDERABLE PART NUMBER	TOP-SIDE MARKING		
	SOIC - D	Tube	SN74ALVC14D	ALVC14		
	30IC - D	Tape and reel	SN74ALVC14DR	ALVC14		
-40°C to 85°C	SOP - NS	Tape and reel	SN74ALVC14NSR	ALVC14		
	TSSOP - PW	Tape and reel	SN74ALVC14PWR	VA14		
	TVSOP - DGV	Tape and reel	SN74ALVC14DGVR	VA14		

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

# FUNCTION TABLE (each inverter)

INPUT A	OUTPUT Y
Н	L
L	Н

#### LOGIC DIAGRAM, EACH INVERTER (POSITIVE LOGIC)





Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SCES107H-JULY 1997-REVISED OCTOBER 2004

,,	(TOP VIEW)									
1A [ 1Y [ 2A [ 2Y [	2 3	14 13 12 11	] V <sub>CC</sub> ] 6A ] 6Y ] 5A							
2Y [ 3A [ 3Y [ GND [	5 6 7	10 9 8	] 5Y ] 4A ] 4Y							

D. DGV. NS. OR PW PACKAGE

## SN74ALVC14 HEX SCHMITT-TRIGGER INVERTER

SCES107H-JULY 1997-REVISED OCTOBER 2004



#### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range		-0.5	4.6	V
VI	Input voltage range <sup>(2)</sup>		-0.5	4.6	V
Vo	Output voltage range <sup>(2)(3)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>1</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		-50	mA
lo	Continuous output current			±50	mA
	Continuous current through $V_{CC}$ or GND			±100	mA
		D package		86	
0	$\mathbf{D}_{\mathbf{r}}$ , $\mathbf{D}_{\mathbf{r}}$	DGV package		127	00444
$\theta_{JA}$	Package thermal impedance <sup>(4)</sup>	NS package		76	°C/W
		PW package		113	
T <sub>stg</sub>	Storage temperature range		-65	150	°C

(1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

(2) The input negative-voltage and output v(3) This value is limited to 4.6 V maximum.

(4) The package thermal impedance is calculated in accordance with JESD 51-7.

### **RECOMMENDED OPERATING CONDITIONS**<sup>(1)</sup>

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage		2.3	3.6	V	
VI	Input voltage		0	3.6	V	
Vo	Output voltage		0	V <sub>CC</sub>	V	
		$V_{CC} = 2.3 V$		-12		
I <sub>OH</sub>	High-level output current	$V_{CC} = 2.7 V$		-12	-12 mA	
		$V_{CC} = 3 V$		-24		
		$V_{CC} = 2.3 V$		12		
I <sub>OL</sub>	Low-level output current	$V_{CC} = 2.7 V$		12	mA	
		$V_{CC} = 3 V$		24		
T <sub>A</sub>	Operating free-air temperature		-40	85	°C	

 All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



**ELECTRICAL CHARACTERISTICS** 

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP <sup>(1)</sup> MAX	UNIT			
		2.3 V	0.7	1.7				
V <sub>T+</sub>		2.7 V	0.8	2				
Positive-going threshold		3 V	0.8	2	V			
		3.6 V	0.8	2				
		2.3 V	0.35	1.3				
V <sub>T-</sub>		2.7 V	0.4	1.4	V			
Negative-going threshold		3 V	0.6	1.5	v			
		3.6 V	0.8	1.8				
		2.3 V	0.3	1				
$\Delta V_T$		2.7 V	0.3	1.1				
Hysteresis (V <sub>T+</sub> - V <sub>T-</sub> )		3 V	0.3	1.2	V			
( 17 1-)		3.6 V	0.3	1.2				
	I <sub>OH</sub> = 100 μA	2.3 V to 3.6 V	V <sub>CC</sub> - 0.2					
	I <sub>OH</sub> = -6 mA	2.3 V	2					
		2.3 V	1.7		V			
V <sub>OH</sub>	I <sub>OH</sub> = -12 mA	2.7 V	2.2					
		3 V	2.4					
	I <sub>OH</sub> = -24 mA	3 V	2					
	I <sub>OL</sub> = 100 μA	2.3 V to 3.6 V		0.2				
	I <sub>OL</sub> = 6 mA	2.3 V		0.4				
V <sub>OL</sub>	40.50	2.3 V		0.7	V			
	I <sub>OL</sub> = 12 mA	2.7 V		0.4				
	I <sub>OL</sub> = 24 mA	3 V		0.55				
I <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or GND	3.6 V		±5	μA			
I <sub>CC</sub>	$V_{I} = V_{CC} \text{ or } GND, \qquad I_{O} = 0$	3.6 V		10	μA			
$\Delta I_{CC}$	One input at $V_{CC}$ - 0.6 V, Other inputs at $V_{CC}$ or GND	3 V to 3.6 V		750	μA			
C <sub>i</sub>	$V_{I} = V_{CC}$ or GND	3.3 V		4	pF			

(1) All typical values are at V<sub>CC</sub> = 3.3 V, T<sub>A</sub> = 25°C.

#### SWITCHING CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1 and Figure 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 2 ± 0.2		V <sub>CC</sub> = 2	2.7 V	V <sub>CC</sub> = ± 0.	3.3 V 3 V	UNIT
	(INPUT)	(001201)	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>pd</sub>	А	Y	1	3.7		3.9	1	3.4	ns


#### **OPERATING CHARACTERISTICS**

 $T_A = 25^{\circ}C$ 

PARAMETER		т	ST CONDITIONS	$V_{CC} = 2.5 V$	V <sub>CC</sub> = 3.3 V	UNIT
	FARAMETER			TYP	TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance per inverter	$C_{L} = 0,$	f = 10 MHz	27	31	pF

## SN74ALVC14 HEX SCHMITT-TRIGGER INVERTER


SCES107H-JULY 1997-REVISED OCTOBER 2004

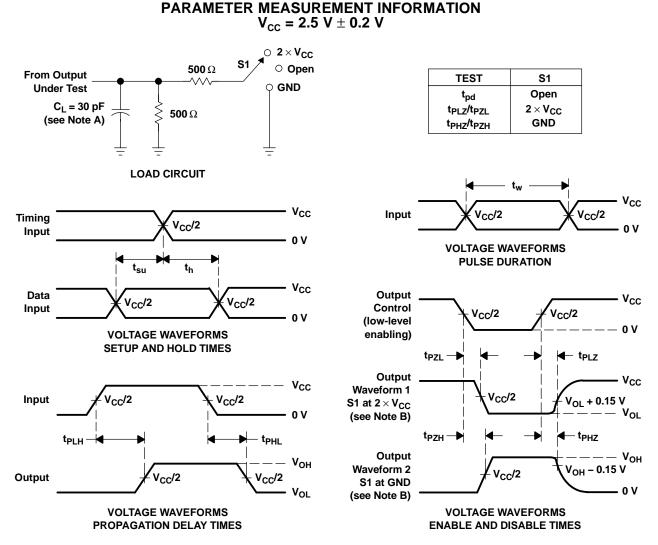

IEXAS

- NOTES: A. C<sub>L</sub> includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>r</sub>  $\leq$  2 ns, t<sub>f</sub>  $\leq$  2 ns.
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
  - H. All parameters and waveforms are not applicable to all devices.

#### Figure 1. Load Circuit and Voltage Waveforms

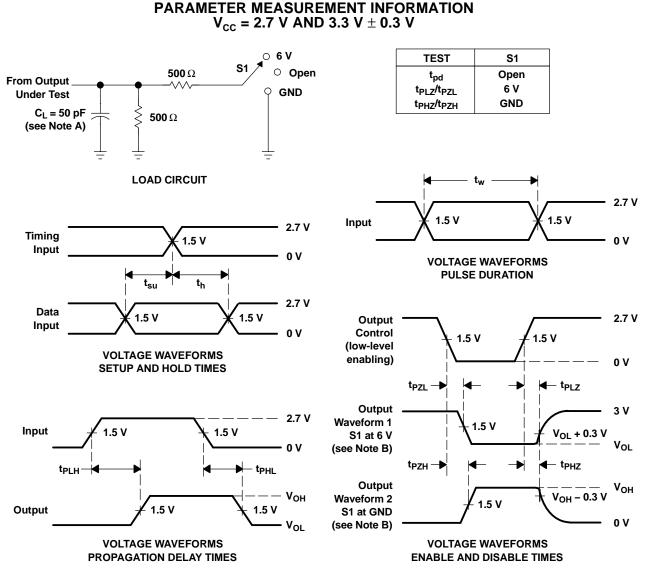

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.

- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>r</sub>  $\leq$  2.5 ns, t<sub>f</sub>  $\leq$  2.5 ns.
- D. The outputs are measured one at a time, with one transition per measurement.
- E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
- F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
- G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .
- H. All parameters and waveforms are not applicable to all devices.

#### Figure 2. Load Circuit and Voltage Waveforms



### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	•	Pins	•	Eco Plan	Lead finish/	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	Ball material	(3)		(4/5)	
SN74ALVC14D	ACTIVE	SOIC	D	14	50	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVC14	Samples
SN74ALVC14DG4	ACTIVE	SOIC	D	14	50	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVC14	Samples
SN74ALVC14DGVR	ACTIVE	TVSOP	DGV	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VA14	Samples
SN74ALVC14DR	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVC14	Samples
SN74ALVC14DRG4	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVC14	Samples
SN74ALVC14NSR	ACTIVE	SO	NS	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVC14	Samples
SN74ALVC14PWR	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VA14	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW**: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.



www.ti.com

## PACKAGE OPTION ADDENDUM

10-Dec-2020

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## PACKAGE MATERIALS INFORMATION

www.ti.com

Texas Instruments

### TAPE AND REEL INFORMATION



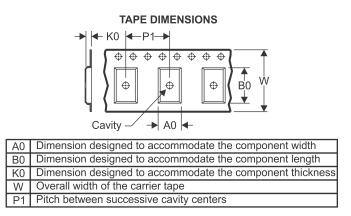

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal												
Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALVC14DGVR	TVSOP	DGV	14	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74ALVC14DR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74ALVC14NSR	SO	NS	14	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
SN74ALVC14PWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TEXAS INSTRUMENTS

www.ti.com

## PACKAGE MATERIALS INFORMATION

30-Dec-2020



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALVC14DGVR	TVSOP	DGV	14	2000	853.0	449.0	35.0
SN74ALVC14DR	SOIC	D	14	2500	853.0	449.0	35.0
SN74ALVC14NSR	SO	NS	14	2000	853.0	449.0	35.0
SN74ALVC14PWR	TSSOP	PW	14	2000	853.0	449.0	35.0

### MECHANICAL DATA

#### PLASTIC SMALL-OUTLINE PACKAGE

#### 0,51 0,35 ⊕0,25⊛ 1,27 8 14 0,15 NOM 5,60 8,20 5,00 7,40 $\bigcirc$ Gage Plane ₽ 0,25 7 1 1,05 0,55 0-10 Δ 0,15 0,05 Seating Plane — 2,00 MAX 0,10PINS \*\* 14 16 20 24 DIM 10,50 10,50 12,90 15,30 A MAX A MIN 9,90 9,90 12,30 14,70 4040062/C 03/03

NOTES: A. All linear dimensions are in millimeters.

NS (R-PDSO-G\*\*)

**14-PINS SHOWN** 

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



## **MECHANICAL DATA**

PLASTIC SMALL-OUTLINE

MPDS006C - FEBRUARY 1996 - REVISED AUGUST 2000

#### DGV (R-PDSO-G\*\*)

24 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.
- D. Falls within JEDEC: 24/48 Pins MO-153

14/16/20/56 Pins – MO-194



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.





NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



A. An integration of the information o

Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.

Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.

E. Falls within JEDEC MO-153





NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2020, Texas Instruments Incorporated